

# Automation & Control

## Modicon M340

### automation platform

*Unity*

Catalogue  
June

07



*Simply Smart !*

telemecanique.com



This international site allows you to access all the Telemecanique products in just 2 clicks via comprehensive range data-sheets, with direct links to:

- Complete library: technical documents, catalogs, certificates, FAQs, brochures...
- Selection guides from the e-catalog.
- Product discovery sites and their Flash animations.

You will also find illustrated overviews, news to which you can subscribe, a discussion forum, the list of country contacts...

To live automation solutions every day!



### *Flexibility*

- Interchangeable modular functions, to better meet the requirements for extensions
- Software and accessories common to multiple product families



### *Ingenuity*

- Auto-adapts to its environment, "plug & play"
- Application functions, control, communication and diagnostics embedded in the products
- User-friendly operation either directly on the product or remotely



### *Simplicity*

- Cost effective "optimum" offers that make selection easy for most typical applications
- Products that are easy to understand for users, electricians and automation specialists
- User-friendly intuitive programming



### *Compactness*

- High functionality in a minimum of space
- Freedom in implementation



### *Openness*

- Compliance with field bus, connection, and software standards
- Enabling decentralised or remote surveillance via the web with Transparent Ready products


---

	<b>Modicon M340 hardware and Unity software, a naturally productive pair</b>	<i>page 2</i>
<b>1</b>	<b>– Modicon M340 processors, racks and power supply modules</b>	
	<i>Processors selection guide</i>	<i>page 1/2</i>
	<b>Processors modules</b>	<i>page 1/4</i>
	<b>Power supply modules</b>	<i>page 1/10</i>
	<b>Single rack configuration</b>	<i>page 1/14</i>
<b>2</b>	<b>– Input/output modules</b>	
	<b>2-1 Discrete I/O modules</b>	<i>page 2/6</i>
	<b>2-2 Analog I/O modules and programmable process control</b>	<i>page 2/24</i>
	<b>2-3 IP 67 and IP 20 distributed I/O modules</b>	<i>page 2/34</i>
	<b>2-4 Counter modules and Motion Function Blocks</b>	<i>page 2/36</i>
<b>3</b>	<b>– Communication</b>	
	<i>Selection guide</i>	<i>page 3/2</i>
	<b>3-1 Ethernet TCP/IP network - Transparent Ready</b>	<i>page 3/4</i>
	<b>3-2 CANopen machine and installation bus</b>	<i>page 3/38</i>
	<b>3-3 Modbus and character mode serial link</b>	<i>page 3/42</i>
<b>4</b>	<b>– Unity software</b>	
	<i>Selection guide</i>	<i>page 4/2</i>
	<b>Unity software</b>	<i>page 4/4</i>
<b>5</b>	<b>– Connection interfaces, regulated switch mode power supplies and Human/Machines Interfaces</b>	
	<b>Advantys Telefast ABE 7 pre-wired system</b>	<i>page 5/2</i>
	<b>Phaseo Universal range power supplies</b>	<i>page 5/20</i>
	<i>Magelis, Magelis iPC, Vijeo and FactoryCast selection guides</i>	<i>page 5/32</i>
<b>6</b>	<b>– Services</b>	
	<b>Technical information</b>	
	Standards, certifications and environment conditions	<i>page 6/2</i>
	Automation product certifications	<i>page 6/6</i>
	Power consumption table	<i>page 6/8</i>
	<b>Index</b>	
	Product reference index	<i>page 6/9</i>

## *A naturally productive pair*

The family of Modicon platforms associated with Unity software offers you ingenuity, flexibility and openness to ever-increasing productivity.

**Modicon M340** concentrates power and innovation, offering the optimum response to the needs of machine manufacturers. It is also the ideal companion for **Modicon Premium** and **Modicon Quantum** to satisfy the need for automation of industrial processes and infrastructures.

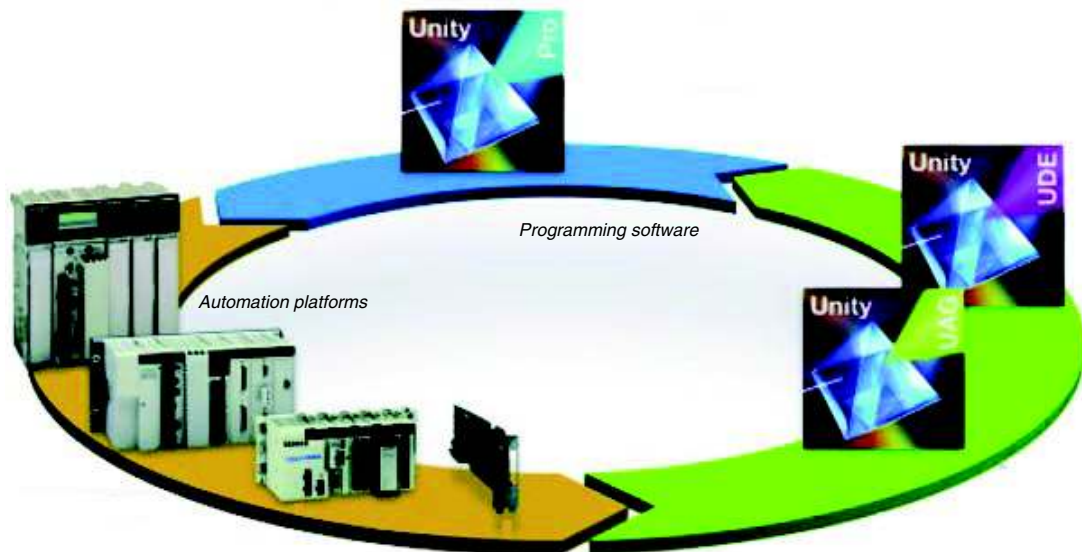

## Modicon automation platforms

### *Modicon M340, the ideal solution for machine specialists*

Robust, powerful and compact, the new Modicon M340 PLC is the ideal solution for machine manufacturers in applications such as secondary packaging, materials handling, textiles, printing, food processing, woodworking machines, ceramics, etc. The integration of Altivar and Lexium variable speed drives, Magelis display units and Preventa safety modules has been boosted in order to simplify the setup and use of Telemecanique solutions.

Modicon M340 is also the ideal companion for Modicon Premium and Modicon Quantum to meet the demand for automation of industrial processes and infrastructures, at the heart of Transparent Ready architectures.

### *Modicon Premium, the optimum solution for the manufacturing industry and infrastructures*

Modicon Premium stands out as the specialist in complex machines and manufacturing processes. Its level of performance when processing Boolean, numeric instructions and instructions on tables make it the market reference. Thanks to its ability to integrate distributed architectures, Modicon Premium provides ideal solutions for infrastructure projects, particularly in the water and transport sectors.

In addition, Modicon Atrium, the version of Modicon Premium in PCI format, offers a "PC Based" alternative.

### *Modicon Quantum, the specialist in critical systems in the process industries and infrastructures*

Capable of incredible distributed architectures, with an extensive catalog of modules complemented by several technological partnerships in the context of the Collaborative Automation program, Modicon Quantum offers a perfect response to the needs of continuous or semi-continuous industrial processes, and control of large infrastructure sites.

Capitalizing on more than 25 years' experience in the field of redundancy, Modicon Quantum is the ideal solution for applications requiring very high levels of availability. The offer is therefore suitable in native fashion for critical applications such as petrochemicals, metallurgy, cement, energy, tunnels and airports.

(\*) Smarter and more intelligent, yet even easier to use.



## Unity software

### *An organizer environment for Modicon platforms*

Unity Pro is the common programming, debugging and run-time software for Modicon M340, Premium and Quantum PLCs, and Atrium slot PLCs.

As an IEC 61131-3 program, Unity Pro is based on the acknowledged standards of PL7 and Concept. It opens the doors of a complete set of new functions for increased productivity:

- State-of-the-art functionality
- Optimum standardization enabling re-use of developments
- Numerous tools for testing the program and improving system operation
- New integrated diagnostic services

Migration of existing applications is taken into account. This maximizes your software investment, reduces training costs and offers unrivaled potential for development and compatibility.

The Unity software catalog includes specialist software for even better productivity:

- Openness to developments in C language or in VBA (Visual Basic for Applications)
- Design and generation of batch/process applications with PLC/HMI integration



## Transparent Ready

### *Naturally communicative*

Based on Ethernet TCP/IP and Web technologies, the Modicon Transparent Ready automation platforms offer solutions to optimizing performances in electrical distribution, automation and control.

Web servers, sending e-mail, direct database access, device synchronization, I/O distribution, etc, Modicon offers you the best of Ethernet.

## Collaborative Automation Partner Program



## Collaborative Automation

### *The new world of automation*

- Rather than opting for proprietary systems, Telemecanique has adopted market standards such as IEC languages, Ethernet TCP/IP, Modbus IDA, XML, OPC, IT standards, etc.
- Partnerships with recognized leading hardware and software specialists have been developed within the scope of the Collaborative Automation Partner Program, in an effort to share technology more effectively.
- You will be assured of designing the best solution without compromising on ease of integration.

# Modicon M340 automation platform

## Hardware base



Modicon M340 platform

### New Modicon M340 platform

Equipped with astounding memory and performances, this featherweight version will imbue your applications with new momentum. Designed to operate in total synergy with other Telemecanique devices, Modicon M340 represents pure concentrated power.

#### Performance

- 7 Kinstructions/ms
- 4 MB of program memory
- 256 KB of data

#### Compact design

- 3 communication ports integrated in the processor
- H x W x D = 100 x 32 x 93 mm.
- High-density discrete I/O modules with 64 channels in a 32 mm wide format.

#### Communicative, with its integrated ports

- CANopen machine and installation bus
- Ethernet TCP/IP network - Transparent Ready
- Modbus serial link or character mode
- Remote access via STN, GSM, Radio or ADSL

#### Expert

- Counter modules with ready-to-use functions
- Function block library dedicated to motion control. MFB (*Motion Function Blocks*) to the PLCopen standard
- Advanced library of process control blocks oriented towards control of machinery

#### Innovative

- USB port as standard
- Embedded Web server
- Recipe file management via FTP protocol
- "Plug and Load" SD memory card
- No batteries

#### Ruggedness


- Rack architecture enabling hot swapping of modules during operation (*Hot-Swap*)
- Exceeds the standards in terms of shocks, vibrations, temperature, altitude and withstand to electrical interference.

*As standard, Modicon M340 has exclusive services normally reserved for PLCs in a higher category.*



# Modicon M340 automation platform

## Unity Pro software

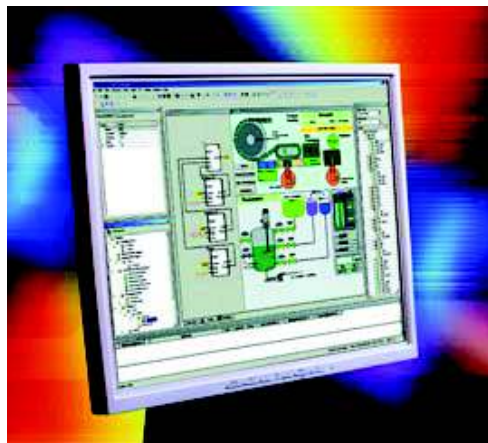

### Unity, software productivity

#### *All-in-one, easy-to-use software*

Unity Pro fully exploits the advantages of the graphic and contextual interfaces of Windows XP and Windows 2000 :

- Direct access to tools and information
- 100% graphics-based configuration
- Customizable toolbar and icons
- Advanced drag & drop and zoom functions
- Integrated diagnostic window

#### *All the advantages of standardization*

Unity Pro provides a complete set of functions and tools for applying the application structure to the structure of the process or machine. The program is divided into hierarchically-organized function modules containing:

- Program sections
- Animation tables
- Operator screens
- Hyperlinks

Basic functions that are used repeatedly can be encapsulated in user function blocks (DFBs) in an IEC 61131-3 language.

#### *Time savings from re-use of modules*

Once they have been tested and qualified, your standards reduce development and installation times on site, thereby optimizing quality and reducing lead times:

- Function modules that can be reused in the application or between projects by XML import/export.
- Function blocks instantiated by dragging and dropping them from the library.
- Instances that can be updated automatically to reflect modifications made in the library (if this option is selected by the user)

#### *Maximum quality assured*

The integrated PLC simulator faithfully reproduces the behavior of the target program on a PC. All the debugging tools can be used during simulation, to enhance quality before installation:

- Step-by-step program execution
- Breakpoint and watchpoint
- Real-time animations for displaying the state of the variables and the logic during operation

#### *Reduced downtime*

Unity Pro features a DFB library for application diagnostics. Integrated into the program, these DFBs can be used (depending on their function) to monitor permanent conditions relating to security and the development of a process over time. A display window provides a clear display of all system and application faults in chronological order (date-stamped at source). From this window, you can simply click to access the editor for the program in which the error occurred (search for missing conditions at source).

Online modifications can be grouped consistently in local mode on a PC and transferred directly to the PLC in a single operation in order to be taken into account in the same scan cycle. A complete range of functions provide the basis for precision control of your operations, to minimize downtime:

- Log of operator actions on Unity Pro in a protected file
- User profile and password protection
- Integrated graphic runtime screens





# 1 - Processors, power supplies and racks

---

## 1 - Modicon M340 processors

*Processors selection guide* ..... page 1/2

### ■ Processor modules

- Presentation, description ..... page 1/4
- Memory structure ..... page 1/6
- Characteristics ..... page 1/8
- References ..... page 1/9

### ■ Power supply modules

- Presentation, description ..... page 1/10
- Functions ..... page 1/11
- Characteristics ..... page 1/12
- References ..... page 1/13

### ■ Single-rack configuration

- Presentation, description ..... page 1/14
- Functions ..... page 1/14
- References ..... page 1/15
- Dimensions, mounting ..... page 1/15

# Modicon M340

## automation platform

### Modicon M340 processors

1

## Modicon M340 platform for Unity Pro software offer

## BMX 34 10 Standard processor



<b>Racks</b>	Number of racks Max. number of slots (excluding power supply module)	1 (4, 6, 8 or 12 slots) 12
<b>Inputs/Outputs</b>	In-rack discrete I/O (1)	512 channels (modules with 8, 16, 32 or 64 channels)
	In-rack analog I/O (1)	128/66 channels (2) (modules with 2, 4, 6 or 8 channels)
	Distributed I/O	Limited depending on the type of medium: Over Ethernet TCP/IP network via network module (63 devices with I/O Scanning function), over Modbus link (32 devices)
<b>In-rack application-specific channels</b>	Max. number of channels (counter and serial link)	20
	Counter (1)	2-channel (60 kHz) or 8-channel (10 kHz) modules
	Motion control	–
<b>Integrated communication ports</b>	Process control, programmable loops	Process control EFB library
	Ethernet TCP/IP network	–
	CANopen Master machine and installation bus	–
<b>Communication modules</b>	Serial link	1 in RTU/ASCII Modbus master/slave mode or in character mode (non-isolated RS232/RS485, 0.3...19.2 Kbit/s)
	USB port	1 programming port (PC terminal)
<b>Internal memory capacity</b>	Max. number of networks (1)	1 (BMX NOE 0100/0110 network module)
	Ethernet TCP/IP network	1 x 10BASE-T/100BASE-TX (Modbus TCP/IP, BOOTP/DHCP, FDR, Global Data, I/O Scanning, web server (standard, class B30 or configurable, class C30))
<b>Memory card capacity (on processor)</b>	Internal user RAM	2,048 Kb
	Program, constants and symbols	1,792 Kb
	Located/unlocated data	128 Kb
<b>Application structure</b>	Backup of program, constants and symbols	8 Mb as standard
	Hosting and display of user web pages	– (3)
	File storage	–
<b>No. of Kinstructions executed per ms</b>	Master task	1
	Fast task	1
	Event tasks	32
<b>Rack power supply</b>	100% Boolean	5.4 Kinstructions/ms
	65% Boolean + 35% fixed arithmetic	4.2 Kinstructions/ms
		24 V $\equiv$ isolated, 24...48 V $\equiv$ isolated or 100...240 V $\sim$ power supply module

## Modicon M340 processor

## BMX P34 1000

## Page

1/9

(1) The maximum values for the number of discrete I/O, analog I/O and counter channels and the number of networks are not cumulative (they are limited by the number of slots in the single-rack configuration, i.e. 11 maximum).

(2) The first value is applied to a multi-rack configuration (not available). The second value corresponds to the physical limit with a single-rack configuration.

(3) User web pages with FactoryCast module **BMX NOE 0110** (16 Mb available).

**BMX 34 20 Performance processors**


1 (4, 6, 8 or 12 slots)		
12		
1,024/704 channels (2) (modules with 8, 16, 32 or 64 channels)		
256/66 channels (2) (modules with 2, 4, 6 or 8 channels)		
Limited depending on the type of medium: on CANopen bus (63 devices), on Ethernet TCP/IP network via network module (63 devices with I/O Scanning function), on a Modbus link (32 devices)		
36		
2-channel (60 kHz) or 8-channel (10 kHz) modules		
MFB (Motion Function Blocks) library (control of drives or servo drives on the CANopen bus)	–	MFB (Motion Function Blocks) library (control of drives or servo drives on the CANopen bus)
Process control EFB library		
–	1 x 10BASE-T/100BASE-TX (Modbus TCP/IP, BOOTP/DHCP, FDR, class B10 standard web server)	
1 (63 slaves, 50...1,000 Kbit/s, class M20)	–	1 (63 slaves, 50...1,000 Kbit/s, class M20)
1 in RTU/ASCII Modbus master/slave mode or in character mode (non-isolated RS232/RS485, 0.3...19.2 Kbit/s)	–	–
1 programming port (PC terminal)		
1 (BMX NOE 0100/0110 network module)		
1 x 10BASE-T/100BASE-TX (Modbus TCP/IP, BOOTP/DHCP, FDR, Global Data, I/O Scanning, web server (standard, class B30 or configurable, class C30))		
4,096 Kb		
3,584 Kb		
256 Kb		
8 Mb as standard		
– (3)		
16 Mb (with optional card BMX RMS 008MPF)		
1		
1		
64		
8.1 Kinstructions/ms		
6.4 Kinstructions/ms		
24 V $\equiv$ isolated, 24...48 V $\equiv$ isolated or 100...240 V $\sim$ power supply module		

**BMX P34 2010**
**BMX P34 2020**
**BMX P34 2030**

1/9

# Modicon M340

## automation platform

### Processor modules

1

Modicon M340 automation platform



I/O and application-specific modules

BMX P34 processor

--- or ~ power supply

#### Presentation

Standard and Performance processors from the Modicon M340 automation platform manage an entire PLC single-rack station on which a maximum of 11 slots can be equipped with:

- Discrete I/O modules
- Analog I/O modules
- Application-specific modules (counter, Ethernet TCP/IP communication)

The four processors offered have different memory capacities, processing speeds, number of I/O and number and type of communication ports.

In addition, depending on the model, they offer a maximum (non-cumulative) of:

- 512 to 1024 discrete I/O
- 128 to 256 analog I/O
- 20 to 36 counter channels
- 0 to 2 Ethernet TCP/IP networks (with or without integrated port and network module)

Depending on the model, Modicon M340 processors include:

- A 10BASE-T/100BASE-TX Ethernet TCP/IP port
- A CANopen machine and installation bus
- A Modbus serial link
- A USB type TER port (for a programming terminal)

Each processor is supplied with a memory card used for:

- Backing up the application (program, symbols and constants)
- Activating a standard web server for the Transparent Ready B10 class integrated Ethernet port (depending on the model)

This memory card can be replaced by another type of memory card, to be ordered separately, that supports:

- Backing up the application and activating the standard web server (same as other card)
- A 16 Mb storage area for additional data organized in a file system (directories and sub-directories)

#### Programming Modicon M340 applications

To set up processors from the Modicon M340 automation platform, you need either:

- Unity Pro Small programming software
- Unity Pro Medium, Large or Extra Large programming software identical to that used to set up Modicon Premium and Modicon Quantum automation platforms
- With possibly, depending on requirements:
  - Unity EFB toolkit software for developing EF and EFB libraries in C language
  - Unity SFC View software for viewing and diagnostics of applications written in Sequential Function Chart language (SFC) or Grafset
  - Unity Dif software for comparison Unity Pro applications, version  $\geq 2.1$ .


The function block software libraries provide Modicon M340 processors with the processing capability required to meet the needs of specialist applications in the following areas:

- Process control via programmable control loops (EF and EFB libraries)
- Motion control with multiple independent axis functions (MFB (*Motion Function Blocks*) library). The axes are controlled by Altivar 31/71 variable speed drives or Lexium 05/15 servo drives connected over the CANopen machine and installation bus.


# Modicon M340

## automation platform


### Processor modules




BMX P34 1000



BMX P34 2010



BMX P34 2020



BMX P34 2030

#### Description of BMX P34 1000/2010 processors

**BMX P34 1000/2010** Standard and Performance single-format processors have the following on the front panel:

- 1 Safety screw for locking the module in its slot (marked 0) in the rack
- 2 A display block comprising 5 or 7 LEDs, depending on the model:
  - RUN LED (green): Processor running (program executing)
  - ERR LED (red): Processor or system fault
  - I/O LED (red): I/O module fault
  - SER COM LED (yellow): Activity on the Modbus serial link
  - CARD ERR LED (red): Memory card missing or faulty
- With, in addition, for model **BMX P34 2010**:
  - CAN RUN LED (green): Integrated machine/installation bus operational
  - CAN ERR LED (red): Integrated machine/installation bus fault
- 3 A mini B USB connector for a programming terminal (or Magelis XBT GT operator interface)
- 4 A slot equipped with Flash memory card for backing up the application (an LED, located above this slot, indicates recognition of or access to the memory card)
- 5 An RJ45 connector for the Modbus serial link or character mode link (RS 232C/RS 485, 2-wire, non-isolated)

With, in addition, for model **BMX P34 2010**:

- 6 A 9-way SUB-D connector for the CANopen master machine and installation bus

#### Description of BMX P34 2020/2030 processors with integrated Ethernet TCP/IP port

**BMX P34 2020/2030** Performance single-format processors have the following on the front panel:

- 1 Safety screw for locking the module in its slot (marked 0) in the rack
- 2 A display block comprising 8 or 10 LEDs, depending on the model:
  - RUN LED (green): Processor running (program executing)
  - ERR LED (red): Processor or system fault
  - I/O LED (red): I/O module fault
  - SER COM LED (yellow): Activity on the Modbus serial link
  - CARD ERR LED (red): Memory card missing or faulty
  - ETH ACT LED (green): Activity on the Ethernet TCP/IP network
  - ETH STS LED (green): Ethernet TCP/IP network status
  - ETH 100 LED (red): Data rate on the Ethernet TCP/IP network (10 or 100 Mbit/s)
- With, in addition, for model **BMX P34 2030**:
  - CAN RUN LED (green): Integrated machine/installation bus operational
  - CAN ERR LED (red): Integrated machine/installation bus fault
- 3 A mini B USB connector for a programming terminal (or Magelis XBT GT operator interface)
- 4 A slot equipped with Flash memory card for backing up the application (an LED, located above this slot, indicates recognition of or access to the memory card)
- 5 An RJ45 connector for connection to the Ethernet TCP/IP 10BASE-T/100BASE-TX network

Also included, depending on the model:


- 6 **BMX P 34 2020** processor: An RJ45 connector for the Modbus serial link or character mode link (RS 232C/RS 485, 2-wire, non-isolated)
- 7 **BMX P 34 2030** processor: A 9-way SUB-D connector for the CANopen master machine and installation bus

On the back panel there are two rotary switches for assigning the IP address. There are three ways to define this assignment:

- Address set by the position of the two switches
- Address set by the application parameters
- Address set by the Ethernet TCP/IP BOOTP server

#### Memory structure

BMX P34 1000/20●0 processor with memory card supplied as standard

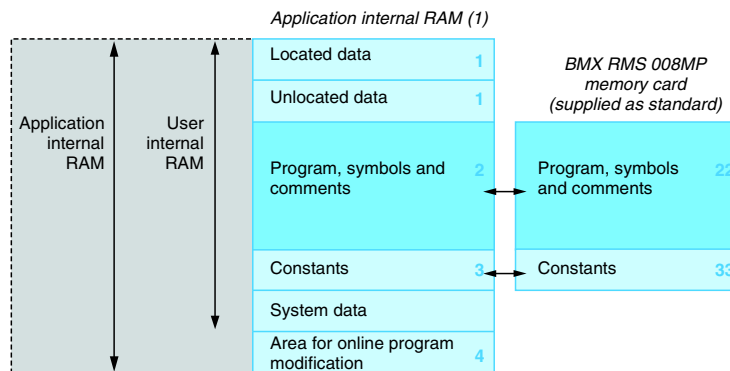

#### Application internal RAM

The application memory is divided into memory areas, physically distributed in the Modicon M340 processor's internal RAM:

- 1 Application data area, which may be one of two 2 possible types:
  - Located data, corresponding to the data defined by an address (for example %MW237) with which a symbol can be associated (for example, Counter\_reject).
  - Unlocated data, corresponding to data defined only by a symbol. The use of unlocated data eliminates the restrictions of managing the memory location since the addresses are assigned automatically and also allows data to be structured and re-used.

This data area is backed up automatically when the PLC is turned off by duplicating its contents in a 256 Kbyte non-volatile internal memory integrated in the processor. It is also possible to back up this memory at any time with a user program.

- 2 Program, symbols and comments area: At program level this area contains the executable binary code and IEC source code.
- 3 Constants area: This area supports the constant located data (%KWi).
- 4 Area for online program modification (see page 1/7)

The user can choose to transfer the source data to the executable program in the PLC. The fact of having the program source in the PLC means that, when an empty programming terminal is connected to the PLC, all the elements needed to debug or upgrade this application can be restored to the terminal. Comments and animation tables can be excluded from the data embedded in the PLC.

#### Memory card

Modicon M340 processors are supplied with an SD (*Secure Digital*) type Flash memory card. This memory card is intended for backing up the program, symbols and comments area 2 and the constants area 3.


Duplication (for areas 22 and 33) and retrieval (on return of power) operations are managed automatically by the system and are therefore transparent to the user.

This card (formatted by Schneider Electric and supplied with each processor) is referenced as a replacement part **BMX RMS 008MP**.

(1) For the size of the different memory areas, see characteristics, page 1/8.

#### Memory structure (continued)

##### BMX P34 20●0 processor with BMX RMS 008MPF memory card

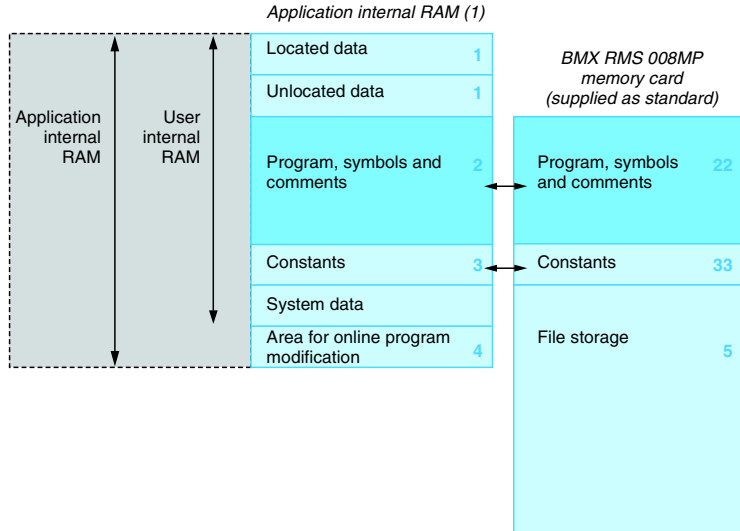

In place of the BMX RMS 008MP memory card (supplied as standard with each processor), **BMX P34 2010/2020/2030** processors can take the **BMX RMS 008MPF** memory card. With the three above-mentioned processors, this card also offers (in addition to the features of the BMX RMS 008MP card supplied as standard described on page 1/6):

- 5 A file storage area (for additional data, such as production data and manufacturing recipes): This area is limited to 16 Mb. These files can be managed from the application program or by any FTP client connected to the Ethernet TCP/IP port integrated in the processor.

For **BMX P34 2020/2030** processors with integrated Ethernet TCP/IP port, the **BMX RMS 008MPF** memory card also offers standard web services (Transparent Ready class B10).

The Unity Pro programming software assists the application designer with managing the structure and memory space occupation of the Modicon M340 automation platform.

#### Protecting the application

If necessary, it is possible to prohibit access to the application (in terms of reading or modifying the program) by only loading the executable code to the PLC. Additionally, a memory protection bit, set in configuration mode, is also available to prevent any program modification (via the programming terminal or downloads).

#### Modifying the program in online mode

As with Modicon Premium and Quantum platforms (with Unity Pro software), the online program modification function is available on the Modicon M340 automation platform with the option of adding or modifying the program code and data in different places in the application in a single modification session (thus ensuring modification is homogenous and consistent with the controlled process).

The application internal RAM memory area 4 authorizes these program modification or addition sessions while observing the recommendation to structure the application program in several, reasonably-sized sections.



# Modicon M340

## automation platform

### Processor modules

1

Modicon M340 Micro-PLCs have been designed to conform with the main national and international standards relating to electronic devices for industrial control systems (see pages 6/2 to 6/7 "Standards, certifications and environmental conditions").

#### Characteristics and performance

Processor				Standard BMX P34 1000	Performance BMX P34 2010      BMX P34 2020      BMX P34 2030		
Maximum configuration	No. of racks	4, 6, 8 or 12 slots		1			
	Max. number of slots for processor and modules (excluding power supply module)			12			
Functions	Max. no. (1)	Discrete I/O		512	1,024, 704 in single-rack configuration (64 I/O x 11)		
		Analog I/O		128, 66 in single-rack configuration (4I/2Q x 11)	256, 66 in single-rack configuration (4I/2Q x 11)		
		Control channels		Programmable loops (via CONT-CTL process control EFB library)			
		Counter channels		20	36		
		Motion control		–	Independent axes on CANopen bus (via MFB library)	–	Independent axes on CANopen bus (via MFB library)
	Integrated connections	Ethernet TCP/IP		–	1 RJ45 port, 10/100 Mbit/s, with Transparent Ready class B10 standard web server		
		CANopen master bus		–	1 (9-way SUB-D)	–	1 (9-way SUB-D)
		Serial link		1 RJ45 port, Modbus master/slave RTU/ASCII or character mode (non-isolated RS 232C/RS 485), 0.3...19.2 Kbit/s			
		USB port		1 port, 12 Mbit/s			
	Communication module	Ethernet TCP/IP		1 RJ45 port, 10/100 Mbit/s, with: - Transparent Ready class B30 standard web server with BMX NOE 0100 module - Transparent Ready class C30 configurable web server with BMX NOE 0110 module			
	Internal user RAM	Total capacity	Kb	2,048	4,096		
Program, constants and symbols		Kb	1,792	3,584			
Data		Kb	128	256			
Memory card	Supplied as standard (reference BMX RMS 008MP)		Backup of program, constants, symbol and data				
		–	Activation of standard web server, class B10				
	To be ordered separately (reference BMX RMS 008MPF)	–	Backup of program, constants, symbol and data				
		–	File storage, 16 Mb				
	–	Activation of standard web server, class B10					
Maximum size of object areas	Located internal bits	Maximum	bits	16,250 %Mi	32,634 %Mi		
		Default	bits	256 %Mi	512 %Mi		
	Located internal data	Maximum	Bytes	32,464 %MWi internal words, 32,760 %KW constant words			
		Default	Bytes	512 %MWi internal words, 128 %KW constant words	1,024 %MWi internal words, 256 %KW constant words		
	Max. unlocated internal data		Kb	128 (2)	256 (2)		
Application structure	Master task			1 cyclic or periodic			
	Fast task			1 periodic			
	Auxiliary tasks			–			
	Event tasks			32 (including 2 with priority)	64 (including 2 with priority)		
Execution time for one instruction	Boolean		µs	0.18	0.12		
	On words or fixed point arithmetic	Single-length words	µs	0.38	0.25		
		Double-length words	µs	0.26	0.17		
	On floating points		µs	1.74	1.16		
No. of Kinstructions executed per ms	100% Boolean		Kinst/ms	5.4	8.1		
	65% Boolean and 35% fixed arithmetic		Kinst/ms	4.2	6.4		
System overhead	Master task		ms	1.05	0.70		
	Fast task		ms	0.20	0.13		
Power consumption	With 24 V ~ voltage		mA	72	90	95	135

(1) Only affects in-rack modules. The remote I/O on the CANopen bus are not included in these maximum numbers.

(2) The size of the located data (internal bits and data) and the size of the configuration data should be deducted from this value.

# Modicon M340

## automation platform

### Processor modules

1

#### BMX P34 Modicon M340 processors

Modicon M340 processor modules are supplied with the **BMX RMS 008MP** Flash memory card. This card performs the following actions transparently:

- Backing up the application (program, symbols and constants) supported in the processor internal RAM that is not backed up,
- Activation of the Transparent Ready class B10 standard web server (with **BMX P34 2020/2030** Performance processors).

This card can be replaced by another card featuring a file storage option.



BMX P34 1000



BMX P34 2010/2030



BMX P34 2020



BMX RMS 008MP / MPF



BMX XCA USB H000

I/O capacity (1)	Memory capacity	Max. no. of network modules	Integrated communication ports	Reference (3)	Weight kg
<b>Standard BMX P340 10</b>					
512 discrete I/O 128 analog I/O 20 application-specific channels	2,048 Kb integrated	1 Ethernet TCP/IP network	Modbus serial link	<b>BMX P34 1000</b>	0.200

<b>Performance BMX P340 20</b>					
1,024 discrete I/O 256 analog I/O 36 application-specific channels	4,096 Kb integrated	1 Ethernet TCP/IP network	Modbus serial link CANopen bus	<b>BMX P34 2010</b>	0.210
			Modbus serial link Ethernet TCP/IP network	<b>BMX P34 2020</b>	0.205
			Ethernet TCP/IP network CANopen bus	<b>BMX P34 2030</b>	0.215

#### Memory card

Description	Use	Processor compatibility	Reference	Weight kg
Memory card 16 Mb	As replacement for the memory card supplied as standard with each processor, used for: - Backup of program, constants, symbol and data - File storage, 16 Mb - Activation of class B10 web server	BMX P34 20●0	<b>BMX RMS 008MPF</b>	0.002

#### Separate parts

Description	Use		Length	Reference	Weight kg
	From	To			
Terminal port/USB cordsets	Mini B USB port on the Modicon M340 processor	PC terminal type A	1.8 m	<b>BMX XCA USB H018</b>	0.065
		USB port	4.5 m	<b>BMX XCA USB H045</b>	0.110

#### Replacement parts

Description	Use	Processor compatibility	Reference	Weight kg
Memory card 8 Mb	Supplied as standard with each processor, used for: - Backup of program, constants, symbol and data - Activation of class B10 web server	BMX P34 1000 / 20●0	<b>BMX RMS 008MP</b>	0.002

(1) For I/O capacity in single-rack configuration, see characteristics, page 1/8.

### Presentation

**BMX CPS ●●●0** power supply modules provide the power supply for each **BMX XBP ●●00** rack and the modules installed on it.

There are two types of power supply module:

- Power supply modules for AC supplies
- Power supply modules for DC supplies

### Description

The power supply module is selected according to:

- The electrical line supply: 24 V  $\equiv$ , 48 V  $\equiv$  or 100...240 V  $\sim$
- The required power (see the power consumption table on page 6/8) (1)

**BMX CPS ●●●0** power supply modules have the following on the front panel :

- 1 A display block comprising:
  - OK LED (green), lit if rack voltages are present and correct
  - 24 V LED (green), lit when the sensor voltage is present (for BMX CPS 2000/3500 AC power supply modules only)
- 2 A pencil-point RESET pushbutton for a cold restart of the application
- 3 A 2-way connector that can take a removable terminal block (screw or spring-type) for connecting the alarm relay
- 4 A 5-way connector that can take a removable terminal block (screw or spring-type) for connecting the following:
  - $\equiv$  or  $\sim$  line supply
  - Protective earth
  - Dedicated 24 V  $\equiv$  power supply for the input sensors (for BMX CPS 2000/3500 AC power supply modules only)

#### To be ordered separately:

Pack of two removable terminal blocks, depending on the model:

- Screw clamp **BMX XTS CPS10**
- Spring-type **BMX XTS CPS20**



(1) This power consumption calculation for the rack can also be performed by the Unity Pro programming software.

#### Functions

##### Alarm relay

The alarm relay located in each power supply module has a volt-free contact accessible from the front of the 2-way connector.

The operating principle is as follows:

In normal operation, with the PLC in RUN, the alarm relay is activated and its contact is closed (state 1).

The relay de-energizes and its associated contact opens (state 0) whenever the application stops, even partially, due to any of the following:

- Occurrence of a blocking fault
- Incorrect rack output voltages
- Loss of supply voltage

##### RESET pushbutton

The power supply module in each rack has a RESET button on the front panel; when activated, this triggers an initialization sequence for the processor and the rack modules it supplies.

Pressing this pushbutton triggers a sequence of service signals, which is the same as that for:

- A power break when the pushbutton is pressed
- A power-up when the pushbutton is released

In terms of the application, these operations represent a cold start (forcing the I/O modules to state 0 and initializing the processor).

##### Sensor power supply

The **BMX CPS 2000/3500** AC power supply modules have an integrated 24 V  $\text{---}$  voltage supply for powering the input sensors. Connection to this sensor power supply is via the 5-way connector on the front panel.

The power available on this 24 V  $\text{---}$  voltage depends on the power supply model (0.45 or 0.9 A) (see characteristics on page 1/12).

# Modicon M340

## automation platform

### Power supply modules

1

#### Characteristics

--- power supply module				BMX CPS 2010		BMX CPS 3020	
Primary	Voltage	Nominal	V	24 --- isolated		24...48 --- isolated	
		Limit (ripple included)	V	18...31.2 ---		18...62..4 ---	
	Current	Input nominal I rms	A	1 at 24 V ---		1.65 at 24 V ---; 0.83 at 48 V ---	
	Initial power-up at 25°C (1)	I inrush	A	24 ---		24 ---	48 ---
		I²t on activation	A²s	≤ 0.6		≤ 1	≤ 3
		It on activation	As	≤ 0.15		≤ 0.2	≤ 0.3
		Micro-break duration	Line (accepted)	ms	≤ 1		
Integrated protection			With internal fuse (not accessible)				
Secondary	Useful power	Max.	W	17		32	
	3.3 V --- voltage (2)	Nominal voltage	V	3.3			
		Nominal current	A	2.5		4.5	
		Typical power	W	8.25		14.85	
	24 V --- output (3)	Nominal voltage	V	24 ---			
		Nominal current	A	0.7		1.3	
		Typical power	W	16.8		31.2	
Integrated protection on the voltages (4)			Yes, against overloads, short-circuits and overvoltages				
Max. dissipated power			W	8.5			
Max. length of power supply cable	Copper wires with 1.5 mm² cross-section		m	20		10	
	Copper wires with 2.5 mm² cross-section		m	30		15	
Insulation	Dielectric strength	Primary/secondary and primary/ground	V rms	1,500 - 50 Hz for 1 min at an altitude of 0...4,000 m			
	Insulation resistance	Primary/secondary and primary/ground	MΩ	≥ 10			
~ power supply module				BMX CPS 2000		BMX CPS 3500	
Primary	Voltages	Nominal	V	100...240 ~			
		Limit (ripple included)	V	85...264 ~			
	Frequencies	Nominal/limit	Hz	50-60/47-63			
	Power	Apparent	VA	70		120	
	Current	Input nominal I rms	A rms	0.61 at 115 V ~; 0.31 at 240 V ~		1.04 at 115 V ~; 0.52 at 240 V ~	
	Initial power-up at 25°C (1)	I inrush	A	120 ~	240 ~	120 ~	240 ~
		I²t on activation	A²s	≤ 30	≤ 60	≤ 30	≤ 60
		It on activation	As	≤ 0.5	≤ 2	≤ 1	≤ 3
		Micro-break duration	ms	0.03	0.06	≤ 0.05	≤ 0.07
	Line (accepted)		ms	≤ 10			
Integrated protection			With internal fuse (not accessible)				
Secondary	Useful power	Max. overall	W	20		36	
		Max. on 3.3 V --- and 24 V --- rack output voltages	W	16.5		31.2	
	3.3 V --- voltage (2)	Nominal voltage	V	3.3			
		Nominal current	A	2.5		4.5	
		Power (typical)	W	8.25		14.85	
	24 V rack --- voltage (3)	Nominal voltage	V	24 ---			
		Nominal current	A	0.7		1.3	
		Typical power	W	16.8		31.2	
	24 V --- sensor voltage (4)	Nominal voltage	V	24 ---			
		Nominal current	A	0.45		0.9	
		Typical power	W	10.8		21.6	
	Integrated protection on the voltages (5)			Yes, against overloads, short-circuits and overvoltages			
	Maximum dissipated power			W	8.5		
Insulation	Dielectric strength	Primary/secondary (24 V/3.3 V)	V rms	1500			
		Primary/secondary (sensor 24 V)	V rms	2300			
		Primary/ground	V rms	1500			
		24 V sensor output/ground	V rms	500			
	Insulation resistance	Primary/secondary and primary/ground	MΩ	≥ 100			

(1) These values should be taken into account when starting several devices simultaneously and when sizing protection devices.

(2) 3.3 V --- voltage for the I/O module logic power supply

(3) 24 V --- voltage for the I/O module power supply and the processor

(4) 24 V --- sensor output for the sensor power supply

(5) Protected by a fuse that cannot be accessed

# Modicon M340

## automation platform

### Power supply modules

1



BMX CPS 2010 / 3020



BMX CPS 2000 / 3500

#### References

Each **BMX XBP ●●00** rack must be equipped with a power supply module. These modules are inserted in the first two slots of each rack (marked CPS).  
The power required to supply each rack depends on the type and number of modules installed in the rack. It is therefore necessary to draw up a power consumption table rack by rack in order to determine the **BMX CPS ●●●0** power supply module most suitable for each rack (see page 6/8).

#### Power supply modules

Line supply	Available power (1)				Reference	Weight kg
	3.3 V $\overline{\text{---}}$ (2)	24 V rack $\overline{\text{---}}$ (2)	24 V sensor $\overline{\text{---}}$ (3)	Total		
24 V $\overline{\text{---}}$ isolated	8.3 W	16.8 W	–	16.8 W	<b>BMX CPS 2010</b>	0,290
24...48 V $\overline{\text{---}}$ isolated	15 W	31.2 W	–	31.2 W	<b>BMX CPS 3020</b>	0,340
100...240 V $\sim$	8.3 W	16.8 W	10.8 W	20 W	<b>BMX CPS 2000</b>	0.300
	15 W	31.2 W	21.6 W	36 W	<b>BMX CPS 3500</b>	0.360

#### Separate parts

Description	Composition	Type	Reference	Weight kg
Pack of 2 removable connectors	One 5-way terminal block and one 2-way terminal block	Cage clamp	<b>BMX XTS CPS10</b>	0.020
		Spring-type	<b>BMX XTS CPS20</b>	0.015

(1) The sum of the absorbed power on each voltage (3.3 V  $\overline{\text{---}}$  and 24 V  $\overline{\text{---}}$ ) should not exceed the total power of the module. See the power consumption table on page 6/8.  
(2) 3.3 V  $\overline{\text{---}}$  and 24 V rack  $\overline{\text{---}}$  voltages for powering Modicon M340 PLC modules  
(3) 24 V sensor  $\overline{\text{---}}$  voltage for powering the input sensors (voltage available via the 2-way removable connector on the front panel)

### Presentation

**BMX XBP 0000** racks are the basic element of the Modicon M340 automation platform in a single-rack configuration.


These racks perform the following functions:

- **Mechanical function:** They are used to install all the modules in a PLC station (power supply, processor, discrete I/O, analog and application-specific I/O). These racks can be mounted on a panel, plate or DIN rail:
  - Inside enclosures
  - On machine frames, etc.
- **Electrical function:** The racks incorporate a Bus X. They are used to:
  - Distribute the power supplies required for each module in the same rack
  - Distribute data and service signals for the entire PLC station
  - Hot swap modules during operation

### Description

**BMX XBP 0000** racks are available in 4, 6, 8 or 12-slot versions, and comprise:

- 1 A metal frame that performs the following functions:
  - Holds the Bus X electronic card and protects it against EMI and ESD type interference
  - Holds the modules
  - Gives the rack mechanical rigidity
- 2 A ground terminal for grounding the rack
- 3 Holes for mounting the rack on a frame. These holes are big enough for M6 screws.
- 4 Fixing points for the shielding connection bar
- 5 Tapped holes to take each module locking screw
- 6 A connector for an expansion module. This connector (marked XBE) is not used for this version.
- 7 40-way female 1/2 DIN connectors forming the connection between the rack and each module. When the rack is delivered, these connectors are protected by covers that should be removed before inserting the modules.  
Slots for anchoring the module pins

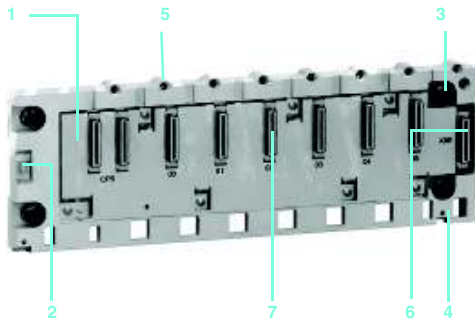

Rack 6 slots BMX XBP 0600

#### To be ordered separately:

**BMX XSP 0000** cable shielding connection kit, used to protect against electrostatic discharge when connecting the shielding of cordsets for connecting:

- Analog modules
- A Magelis XBT operator interface to the processor (via **BMX XCA USBH000** shielded USB cable)

This kit comprises:

- 8 A metal bar that takes the clamping rings
- 9 Two sub-bases to be mounted on the rack
- 10 A set of spring clamping rings for attaching cables with their shielding to the metal bar.  
Packs of 10 **STB XSP 3000** clamping rings can be ordered in addition if required.


### Function

#### Addressing modules in a single-rack configuration

Each rack must contain a power supply module and a processor module.

#### Inserting different modules in the rack:

- The power supply module always occupies the **CPS** slot.
- The processor module must always be installed in slot **00**.
- Its I/O modules and application-specific modules are installed in slot **01** to slot ...
  - **03** with a 4-slot rack
  - **05** with a 6-slot rack
  - **07** with an 8-slot rack
  - **11** with a 12-slot rack

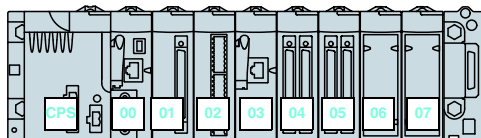


Example of installation with 8-slot rack






BMX XBP 0400



BMX XBP 0800



**BMX XBP 1200**

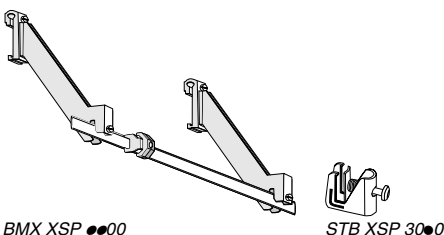

BMX XSP ●●00

STB XSP 30●0

## Racks

Description	Type of module to be inserted	No. of slots (1)	Reference	Weight kg
Racks	BMX CPS power supply, BMX P34 processor, I/O modules and application-specific modules (counter, communication)	4	BMX XBP 0400	1.470
		6	BMX XBP 0600	1.750
		8	BMX XBP 0800	2.310
		12	BMX XBP 1200	—

## Accessories

Description	For use with	Unit reference	Weight kg
<b>Shielding connection kits</b> comprising:	BMX XBP 0400 rack	<b>BMX XSP 0400</b>	0.280
- a metal bar	BMX XBP 0600 rack	<b>BMX XSP 0600</b>	0.310
- two sub-bases	BMX XBP 0800 rack	<b>BMX XSP 0800</b>	0.340
- one set of spring clamping rings	BMX XBP 1200 rack	<b>BMX XSP1200</b>	0.400
<b>Spring clamping rings</b> (pack of 5)	Cables with 1.5...6 mm <sup>2</sup> cross-section	<b>STB XSP 3010</b>	0.050
	Cables with 5...11 mm <sup>2</sup> cross-section	<b>STB XSP 3020</b>	0.070
<b>Protective covers</b> (pack of 5)	Unoccupied slots on BMX XBP ●●00 rack	<b>BMX XEM 010</b>	0.005


(1) Number of slots taking the processor module, I/O modules and application-specific modules (excluding power supply module).

## Dimensions, mounting

## BMX XBP

Common side view

### Front view: BMX XBP example

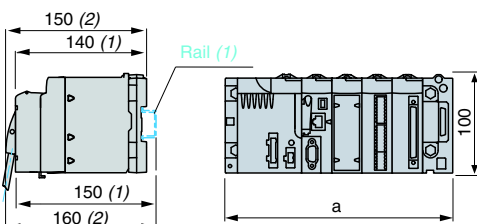


	a
<b>BMX XBP 0400</b>	242.4
<b>BMX XBP 0600</b>	307.6
<b>BMX XBP 0800</b>	372.8
<b>BMX XBP 1200</b>	503.2

(1) With removable terminal block (cage, screw or spring).

(2) *With FCN connector.*

## Mounting the racks


**On AM1 PA and AM3 PA pre-slotted plate**

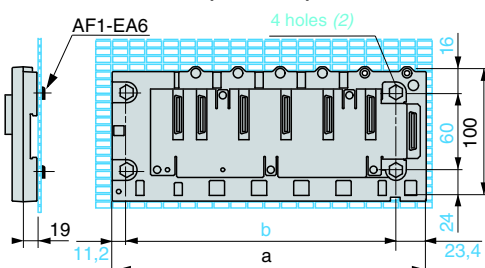

	a	b
<b>BMX XBP 0400</b>	242.4	207.8
<b>BMX XBP 0600</b>	307.6	273
<b>BMX XBP 0800</b>	372.8	338.2
<b>BMX XBP 1200</b>	503.2	468.6

(1) **On AM1 ED rail:** 35 mm wide, 15 mm deep Only possible with BMX XBP 0400/0600/0800 rack.

## Installation rules

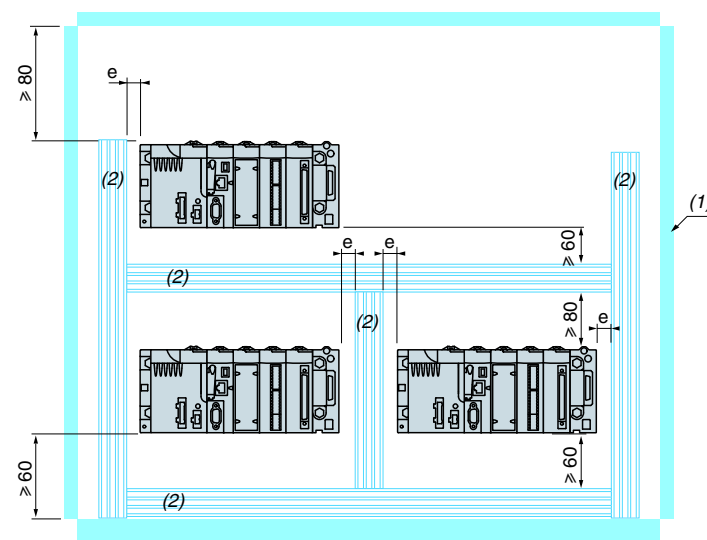
$$e \geq 3 \text{ mm}$$

(1) *Equipment or enclosure.*

(2) Cable ducting or clip.



## 2.1 Discrete I/O modules

*Discrete input, mixed, and output modules selection guide. . . . . page 2/2*

### ■ Discrete I/O modules

- Presentation, description . . . . . page 2/6
- Functions . . . . . page 2/8
- Characteristics . . . . . page 2/10
- References . . . . . page 2/16
- Connections . . . . . page 2/18

## 2.2 Analog I/O modules and process control

*Analog I/O modules selection guide . . . . . page 2/22*

### ■ Analog I/O modules

- Presentation, description . . . . . page 2/24
- Connections . . . . . page 2/25
- Functions . . . . . page 2/26
- Characteristics . . . . . page 2/28
- References . . . . . page 2/31

### ■ Programmable process control . . . . . page 2/32

## 2.3 Distributed I/O

*IP 67 and IP 20 distributed I/O selection guide. . . . . page 2/34*

## 2.4 Counter modules and Motion Function Blocks

### ■ Counter modules

- Presentation, description . . . . . page 2/36
- Functions . . . . . page 2/37
- Characteristics . . . . . page 2/40
- References . . . . . page 2/41
- Connections . . . . . page 2/42

### ■ MFB, Motion Function Blocks . . . . . page 2/44

# Modicon M340 automation platform

Discrete I/O modules  
Input modules and mixed I/O modules

2

2.1

## Applications

## 16-channel input modules

Connection via cage clamp, screw clamp or spring-type removable terminals



## Type

## Voltage

—	—	— or ~	~
24 V	48 V	24 V	48 V
			100...120V

## Modularity

(Number of channels)

16 isolated channels

## Connection

Via BMX FTB 2000/2010/2020 20-way cage clamp, screw clamp or spring-type removable terminals

## Isolated inputs

## IEC 61131-2 conformity

## Logic

Sensor compatibility in accordance with standard IEC 947-5-2

## Type 3

## Type 1

## Type 1 (~)

## Type 3

## Positive

2-wire —, 3-wire — PNP any type

## Pos. or neg.

2-wire —/~, 3-wire — PNP or NPN any type

## —

2-wire ~

## Isolated outputs

## Fallback

## IEC 61131-2 conformity

## Protection

## Logic

## Module

BMX  
DDI 1602BMX  
DDI 1603 ▲BMX  
DAI 1602 ▲BMX  
DAI 1603 ▲BMX  
DAI 1604

## Page

2/16

## Compatibility with installation help system

## Tego Dial

## TeSys Quickfit

## Compatibility with Advantys Telefast ABE 7 pre-wired system

## Connection sub-bases

Input and output adaptor sub-bases

## Passive connection sub-base Optimum "Economy"

## Optimum "Miniature"

## Universal

## Relay adaptor sub-base

## Fixed relays

## Plug-in relays

## Preformed cordsets with 40-way connector

## Pages

▲ Available 4<sup>th</sup> quarter 2007

**32/64-channel high-density input modules**

Connection via 40-way connectors with preformed cordsets

**16/32-channel mixed I/O modules**

Connection via cage clamp, screw clamp or spring-type removable terminals



Connection via 40-way connectors with preformed cordsets

--- 24 V	
32 isolated channels	64 isolated channels
Via one 40-way connector	Via two 40-way connectors
Type 3	Non-IEC
Positive	
2-wire ---, 3-wire --- PNP any type	—

BMX DDI 3202K

BMX DDI 6402K

2/16

APE 1B24M Dialbase interface with 8I/8Q

LU9 G02 splitter boxes (8 motor starters) and BMX FCC ●●1/●●3 preformed cordsets

Depending on model, 8- or 16-channel passive sub-bases, with or without LED, with common or 2 terminals per channel

Depending on model, 16-channel active sub-bases with solid state or electromechanical, fixed or removable relays, 5...48 V ---, 24 V ---, 24 V...240 V ~ or volt-free, with common or 2 terminals per channel, screw or spring-type connection

ABE 7H20E●00

ABE 7H16C●●

ABE 7H08R●●/7H08S21,  
ABE 7H16R1●/7H16R50,  
ABE 7H16R2●/7H16S21,  
ABE 7H16R3●/7H16R23,  
ABE 7H16S43,

ABE 7S16E2●●

ABE 7P16F31●●

BMX FCC ●●1/FCC ●●3

5/10 to 5/15, 2/17

--- 24 V I/O	--- and ~ (outputs only) 24 V inputs, relay outputs	--- 24 V I/O
8 isolated inputs and 8 isolated outputs		16 isolated inputs and 16 isolated outputs
Via BMX FTB 2000/2010/2020 20-way cage clamp, screw clamp or spring-type removable terminals		Via one 40-way connector
Type 3		
Positive	—	Positive

Configurable output fallback, continuous monitoring of output control and resetting of outputs in case of internal fault

Yes		
Protected	Not protected	Protected
Positive	—	Positive

BMX DDM 16022

BMX DDM 16025

BMX DDM 3202K

2/17

—

—

APE 1B24M Dialbase interface

LU9 G02 splitter boxes (8 motor starters) and BMX FCC ●●1/●●3 preformed cordsets

—

—

—

—

—

—

—

ABE 7H20E●00

ABE 7H16C●●

ABE 7H08R●●/7H08S21,  
ABE 7H16R1●/7H16R50,  
ABE 7H16R2●/7H16S21,  
ABE 7H16R3●/7H16R23,  
ABE 7H16S43/7H16F43

ABE 7S16E2●●

ABE 7S16S●●●/7R16S

ABE 7P16F31●●

ABE 7R16T●●●/7P16T●●●

BMX FCC ●●3

5/10 to 5/15, 2/17

# Modicon M340

## automation platform

Discrete I/O modules  
Output modules

2

2.1

## Applications

32/64-channel high-density output modules

Connection via 40-way connectors with preformed cordsets



## Type

— solid state

## Voltage

24 V

## Current

0.1 A per channel

Modularity  
(Number of channels)

32 protected channels

64 protected channels

## Connection

Via one 40-way connector

Via two 40-way connectors

## Isolated outputs

## Fallback

Configurable output fallback, continuous monitoring of output control and resetting of outputs in case of internal fault

IEC 61131-2 conformity  
Protection

Yes

## Logic

Positive

—

## Discrete output module

BMX DDO 3202K

BMX DDO 6402K

## Page

2/16

Compatibility with  
installation help system

## Tego Dial

—

## TeSys Quickfit

—

Compatibility with  
Advantys Telefast ABE 7  
pre-wired system

## Connection sub-bases

—

## Input adaptor sub-bases

—

## Passive sub-base

## Optimum “Economy”

ABE 7H20E●00

## Optimum “Miniature”

ABE 7H16C●●

## Universal

ABE 7H08R●●/7H08S21,  
ABE 7H16R1●/7H16R50,  
ABE 7H16R2●/7H16S21,  
ABE 7H16R3●  
ABE 7H16F43

## Relay adaptor sub-base

## Fixed relays

ABE 7S16S●●● / 7R16S

## Removable relays

ABE 7R16T●●●/7P16T●●●

## Preformed cordsets with 40-way connector

BMX FCC●●1/FCC ●●3

## Pages

5/10 to 5/15, 2/17

## 16-channel output modules

## 8/16-channel output modules

Connection via cage clamp, screw clamp or spring-type removable terminals



--- solid state		~ triac		---/~ relay	
24 V ---		100...240 V		24 V ---, 24...240 V ~	
0.5 A per channel		0.6 A per channel		3 A (lth) per channel	2 A (lth) per channel
16 protected channels		16 non-protected channels		8 non-protected channels	16 non-protected channels
Via BMX FTB 2000/2010/2020 20-way cage clamp, screw clamp or spring-type removable terminals					
Configurable output fallback, continuous monitoring of output control and resetting of outputs in case of internal fault		Configurable output fallback			
Yes		Yes			
Current limiter with electronic tripping		—			
Positive	Negative	—			
BMX DDO 1602	BMX DDO 1612 ▲	BMX DAO 1605 ▲	BMX DRA 0805	BMX DRA 1605	

2/16

-

-

-

-

-

-

-

-

-

-

-

▲ Available 4<sup>th</sup> quarter 2007



#### Presentation

Discrete I/O modules in the Modicon M340 offer are standard modules occupying a single slot, equipped with either of the following:

- A connector for a screw or spring-type 20-way removable terminal block
- One or two 40-way connector(s)

A wide range of discrete inputs and outputs can be used to meet whatever requirements arise in terms of:

- functions, AC or DC I/O, positive or negative logic
- modularity, 8, 16, 32 or 64 channels per module

The inputs receive signals from the sensors and perform the following functions:

- acquisition
- adaptation
- electrical isolation
- filtering
- protection against interference signals

The outputs memorize commands issued by the processor to enable control of the preactuators via the decoupling and amplification circuits.

#### Description


**BMX D●I/D●O/DRA** discrete I/O modules are standard format (1 slot). They have a case, which ensures IP 20 protection of the electronics, and are locked into position by a captive screw.

##### I/O modules connected via 20-way removable terminal block

- 1 Rigid body providing support and protection for the electronic card
- 2 Module reference marking (a label is also visible on the right-hand side of the module)
- 3 Channel status display block
- 4 Connector taking the 20-way removable terminal block for connecting sensors or preactuators

##### To be ordered separately:

A **BMX FTB 20●0** 20-way removable terminal block or a preformed cordset with a 20-way removable terminal block at one end and flying leads at the other (see page 2/7).




Module and 20-way removable terminal block

##### I/O modules connected via 40-way connector

- 1 Rigid body providing support and protection for the electronic card
- 2 Module reference marking (a label is also visible on the right-hand side of the module)
- 3 Channel status display block
- 4 One or two 40-way connectors (32 or 64 channels) (1) for connecting sensors or preactuators
- 5 With the 64-channel module, a pushbutton, which, with successive presses, displays the state of channels 0...31 or 32...63 on the block 3 (see page 2/9)


##### To be ordered separately, depending on the type of module:

One or two preformed cordset(s) with a 40-way connector (see page 2/7).

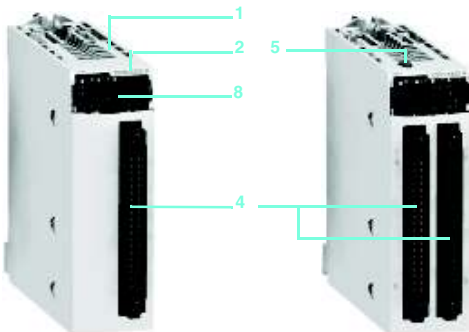


32- and 64-channel modules with for connection via 40-way connector(s)


(1) Fujitsu FCN 40-way connector

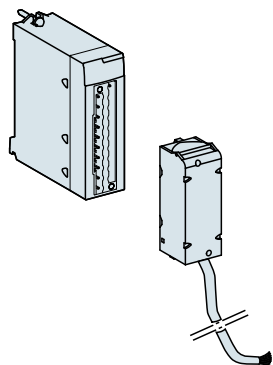


Preformed cordset with removable terminal block at one end and flying leads at the other



Preformed cordset with 40-way connector at one end and 2 flying leads at the other

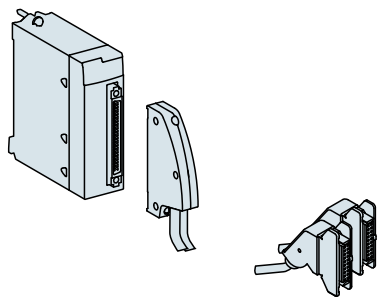

Preformed cordset with 40-way connector and HE 10 connector for Advantys Telefast ABE 7 system

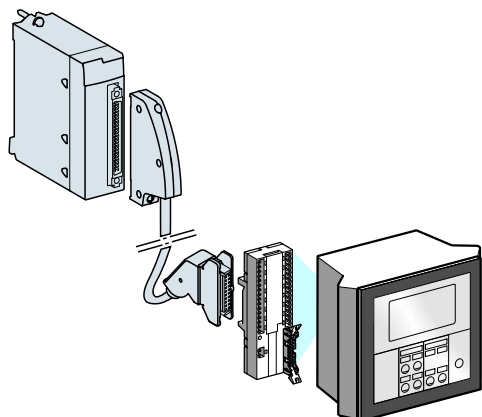

Example of connection to the Tego Dial installation help system

Characteristics:  
pages 2/10 to 2/15

References:  
pages 2/16 to 2/17

Connections:  
pages 2/18 to 2/19

#### Connecting modules with removable terminal blocks

There are three types of 20-way removable terminal block:

- Screw clamp terminal block
- Cage clamp terminal block
- Spring-type terminal block

Each removable terminal block can take:

- Bare wires
- Wires equipped with DZ5-CE cable ends

One version of the removable terminal block is equipped with **BMX FTW●●1** cordsets with color-coded flying leads (3, 5 or 10 m long).

#### Cage clamp terminal blocks

The capacity of each terminal is:

- Minimum: One 0.34 mm<sup>2</sup> wire (AWG 22)
- Maximum: One 1.5 mm<sup>2</sup> wire (AWG 14)

**BMX FTB 2000** cage clamp connectors are equipped with captive screws (maximum tightening torque 0.5 N.m).

#### Screw clamp terminal blocks

The capacity of each terminal is:

- Minimum: One or two 0.34 mm<sup>2</sup> wires (AWG 22)
- Maximum: Two 1.5 mm<sup>2</sup> wires (AWG 14)

**BMX FTB 2010** screw clamp connectors are equipped with captive screws (maximum tightening torque 0.5 N.m).

#### Spring-type terminal blocks

The capacity of each terminal in the **BMX FTB 2020** spring-type terminal blocks is:

- Minimum: Two 0.34 mm<sup>2</sup> wires (AWG 22)
- Maximum: Two 1.5 mm<sup>2</sup> wires (AWG 14)

#### Connecting modules with 40-way connectors

##### Preformed cordsets with 40-way connector at one end and flying leads at the other

Preformed cordsets can be used for easy direct wire-to-wire connection between the I/O of modules with connectors **1** and the sensors, preactuators or intermediate terminals.

These preformed cordsets comprise:

- At one end, a 40-way connector **2** with either of the following:
  - One sheath **3** containing 20 wires with a cross-section of 0.34 mm<sup>2</sup> (AWG 22) (**BMX FCW ●●1**)
  - Two sheaths **4**, each containing 20 wires with a cross-section of 0.34 mm<sup>2</sup> (AWG 22) (**BMX FCW ●●3**)
- At the other end **5**, color-coded flying leads conforming to standard DIN 47100 (see page 2/21)

##### Preformed cordsets with 40-way connector and HE 10 connector(s)

Two types of cordset can be used for connecting the I/O of modules with 40-way connectors **1** to rapid wiring connection and adaptation interfaces called Advantys Telefast ABE **7 2** (see page 5/8).

These preformed cordsets comprise:

- At one end, a 40-way connector **3** with either of the following:
  - One sheath **4** containing 20 wires (**BMX FCC ●●1**)
  - Two sheaths **5** each containing 20 wires (**BMX FCC ●●3**)
- At the other end, one or two HE 10 connectors **6**

#### Connection to Tego Dial and TeSys Quickfit systems

**BMX DDI 3202K/6402K** input modules and **BMX DDO 3202K/6402K** output modules **1** are designed, amongst other things, for use in conjunction with Tego Dial and TeSys Quickfit installation help systems.

The modules are easily connected using a connection cable.

#### Functions

##### Hot swapping

Due to their integrated devices, I/O modules (including application-specific modules) can be removed and connected while powered up.

**Note:** When the PLC is powered up and running, the I/O modules can be removed without any material risk by performing the following sequence **before** removing the module:

- Disconnect the power voltage on the outputs
- Disconnect the sensor and preactuator power supply
- Remove the terminal block or connector

##### I/O module assignment

Discrete I/O modules have different parameters for each channel. The channels are grouped into blocks of 4, 8 or 16 consecutive channels depending on the type of module. Each group of channels can be assigned to a specific application task (master or fast).

##### Protection of DC inputs

The 24 and 48 V  $\overline{\text{DC}}$  inputs are constant-current type. This characteristic makes it possible to:

- Ensure minimum current in active state in compliance with the IEC standard
- Limit the current consumption when the input voltage increases, to avoid unwanted temperature rise in the module
- Reduce the current consumption on the sensor power supply provided by the PLC power supply or by a process power supply

##### Protection of DC outputs

All protected solid state outputs have a protective device which, when an output is active, can detect the occurrence of:

- An overload or short-circuit: This type of fault deactivates the output (tripping) and indicates a fault on the display on the module front panel (the faulty channel LED flashes, the I/O module fault LED lights up).
- Reverse polarity: This type of fault short-circuits the power supply without damaging the module. For this protection to work in optimum conditions, it is essential to place a fast-blow fuse on the power supply upstream of the preactuators.
- Inductive overvoltage: Each output is protected individually against inductive overvoltages and has a fast zener diode demagnetization circuit for electromagnets, which can reduce the output response time for some fast machines.

##### Reactivation of DC outputs

If a fault has caused an output to trip, the output can be reactivated using this parameter if no other terminal fault is present.

Reactivation is defined for each group of 8 channels. It has no effect on an inactive channel or one that is not faulty.

The reactivation command can be:

- Programmed: Reactivation is carried out by a command from the PLC application or via the debug screen. To avoid repeated reactivations too close together, the module automatically allows a time delay of 10 s between two reactivations.
- Automatic: Reactivation takes place automatically every 10 s until the fault disappears.

##### RUN/STOP command

An input can be configured to control the RUN/STOP mode for the PLC.

This is taken into account on a rising edge. A STOP command from an input has priority over a RUN command from a programming terminal or via the network.

#### Functions (continued)

##### Output fallback

This parameter defines the fallback mode used by the DC solid state outputs when the PLC stops following a:

- ☐ Processor fault
- ☐ Rack fault
- ☐ Fault on the cable connecting the racks

The outputs must be set to a state that is not harmful to the application. This state, known as the fallback position, is defined for each module when the DC solid state outputs are configured. This configuration offers a choice between:

- ☐ Fallback: The channels are set to 0 or 1 according to the fallback value defined for the group of 8 corresponding channels.
- ☐ Maintain: The outputs maintain the state in which they were before the stop occurred.

##### I/O module diagnostics

Each discrete I/O module is equipped with a display block on the front panel centralizing all the information necessary for module control, diagnostics and maintenance. The display block comprises:

- 1 A set of 8, 16 or 32 green LEDs depending on the module modularity. Each LED is associated with one channel:
  - On: channel in state 1; Off: channel in state 0
  - Flashing: channel faulty, overloaded or short-circuited
- 2 Three LEDs indicating the module status:
  - RUN (green): On: Normal operation
  - ERR (red): On: Internal module fault; Flashing: Exchange fault between the module and the processor
  - I/O (red): On: External fault (sensor/preactuator voltage, overload, short-circuit, etc.); Flashing: Terminal block fault
- 3 A +32 LED (green) indicating, in the case of 64-channel modules, whether the set of 32 LEDs 1 displays the state of channels 0...31 (off) or the state of channels 32...63 (on). This +32 LED is activated or deactivated by a pushbutton located on top of the module.



##### Diagnostics via Unity Pro

Using the integrated diagnostics in Unity Pro, this local diagnostics on the module front panel is complemented by system diagnostics based on predefined screens at global hardware configuration level, module level and channel level (see pages 4/21 and 4/22).

##### Remote diagnostics using a web browser on a "Thin Client" PC

In addition, the diagnostics described above can be performed remotely using a simple web browser thanks to the standard web server integrated in the Modicon M340 platform (processor with integrated Ethernet port or Ethernet module), using the "ready-to-use" Rack Viewer function (see page 3/4).

#### Compatibility with 2-wire and 3-wire sensors

Input type	≡ 24 V Non CEI log. positive (sink)	≡ 48 V type 1 log. positive (sink)	≡ 24 V type 3 log. positive (sink)	~ 24 V type 1	~ 48 V type 3	~ 100...120V type 3
Any 3-wire ≡ sensor, PNP type						
Any 3-wire ≡ sensor, NPN type				(1)		
Telemecanique 2-wire ≡ sensor or other brand, with the following characteristics: - Residual voltage in closed state ≤ 7 V - Minimum switched current ≤ 2.5 mA - Residual current in open state ≤ 1.5 mA						
Telemecanique 2-wire ≡ sensor or other brand with the following characteristics: - Residual voltage in closed state ≤ 4 V - Minimum switched current ≤ 1 mA - Residual current in open state ≤ 0.5 mA						
2-wire ≡/~ sensor (1)						
2-wire ~ sensor						
	Not compatible			Compatible		

(1) The ~ 24 V inputs can be used as negative logic (source) compatible with 3-wire ≡ sensor, NPN type, but are not IEC-compliant.

#### Common characteristics

##### Environment

Conformity to standards	NFC 63 850, IEC 664, IEC 1131 2, UL 508, UL7 46C, CSA 22 2 no. 142
Temperature derating	The characteristics at 60°C are assured for 60% of inputs and 60% of outputs at state 1

#### Characteristics of DC input modules

Module			BMX DDI 1602	BMX DDI 1603	BMX DDI 3202K	BMX DDI 6402K	BMX DAI 1602		
Number of inputs			16		32	64	16		
Connection			Spring or screw-type 20-way removable terminal block		One 40-way connector	Two 40-way connectors	Spring or screw-type 20-way removable terminal block		
Nominal input values	Voltage	V	24 ---	48 ---	24 ---				
	Current	mA	3.5	2.5	2.5	1	3		
	Logic		Positive ( <i>sink</i> )				Negative ( <i>source</i> )		
Input limit values	At state 1	Voltage	V	≥ 11	≥ 34	≥ 11	≥ 15	≥ 14	
		Current	mA	> 2 (for U ≥ 11 V)	> 2 (for U ≥ 34 V)	> 2 (for U ≥ 11 V)	> 1 (for U ≥ 15 V)	> 2	
	At state 0	Voltage	V	< 5	< 10	< 5			
		Current	mA	≤ 1.5	≤ 0.5	≤ 1.5	≤ 0.5		
	Sensor power supply (ripple included)		V	19...30 (possible up to 34 V, limited to 1 hour in every 24 hours)	38...60	19...30 (possible up to 34 V, limited to 1 hour in every 24 hours)			
	Input impedance at nominal voltage			KΩ	6.8	19.2	9.6	24	6.4
Response time (filtering)	Typical	ms	4					10	
	Maximum	ms	7					20	
Reverse polarity				Protected			No	—	
IEC 61131-2 conformity				Type 3	Type 1	Type 3	Non-IEC		
Compatibility with 2-wire/3-wire sensors				IEC 947-5-2			—		
Paralleling of inputs (1)				Yes		No			
Protection of inputs				Use a external 0.5 A fast-blow fuse per group of channels					
Insulation resistance			MΩ	>10 at 500 V ---					
Dielectric strength	Primary/Secondary	Vrms	1,500 - 50/60 Hz for 1 minute (up to 4,000 m)						
	Between groups of channels	V	—			500 ---		—	
Type of input				Current sink					Resistive
Sensor voltage control threshold	OK	V	> 18 ---	> 36 ---	> 18 ---				
	Fault	V	< 14 ---	< 24 ---	< 14 ---				
Reliability	MTBF in hours	At T <sub>ambient</sub> = 30°C		798,237		696,320	362,681	1,504,958	
Consumption			Typical	mA	See power consumption table page 6/8				
Maximum dissipated power			W	2.5	3.6	3.9	4.3	3	
Temperature derating				None					

(1) This characteristic allows several inputs to be wired in parallel on the same module or on different modules for input redundancy.

#### Characteristics of AC input modules

Module				BMX DAI 1602		BMX DAI 1603		BMX DAI 1604		
Number of inputs					16					
Connection					Spring or screw-type 20-way removable terminal block					
Nominal input values				Voltage	V	24 ~		48 ~		100...120 ~
				Current	mA	3		5		
				Frequency	Hz	50/60				
Input limit values	At state 1	Voltage	V	≥ 15		≥ 34		≥ 74		
		Current	mA	≥ 2				≥ 2.5		
	At state 0	Voltage	V	≤ 5		≤ 10		≤ 20		
		Current	mA	≤ 1						
	Frequency		Hz	47...63						
	Sensor power supply (ripple included)		V	20...26		40...52		85...132		
	Current peak on activation	At nominal voltage	mA	5		95		240		
	Input impedance at nominal voltage and F = 55 Hz				KΩ	6		9		13
Response time (filtering)		Activation	ms	15		10				
		Deactivation	ms	20						
IEC 61131-2 conformity					Type 1		Type 3			
Compatibility with 2-wire/3-wire sensors					IEC 947-5-2					
Protection of inputs					Use a external 0.5 A fast-blow fuse per group of channels					
Insulation resistance				MΩ	>10 at 500 V ---					
Dielectric strength				Vrms	1,500 - 50/60 Hz for 1 minute (up to 4,000 m)					
Type of input					Resistive		Capacitive			
Sensor voltage control threshold		OK	V	> 18		> 36		> 82		
		Fault	V	< 14		< 24		< 40		
Reliability	MTBF in hours	At T <sub>ambient</sub> = 30°C		1,504,958						
Consumption		Typical	mA	See power consumption table page 6/8						
Maximum dissipated power				W	3		4		3.8	
Temperature derating					None					

#### Characteristics of triac output module

Module			BMX DAO 1605
Number of inputs		W	16
Connection			Spring or screw-type 20-way removable terminal block
Operating voltages	Nominal	V	100...240 ~
	Limit	V	85...288 ~
Currents	Maximum	A	0.6 per channel, 2.4 per common, 4.8 for all 4 commons
	Minimum		25 mA at 100 V ~, 25 mA at 240 V ~
Maximum inrush current		A	≤ 20/cycle
Leakage current	At state 0	mA	≤ 1.5 for 120 V ~, 60 Hz, ≤ 3 for 240 V ~, 60 Hz
Residual voltage	At state 1	V	≤ 1.5
Response time	Activation	ms	≤ 1 +/- 0.5 Hz
Nominal resistive load	Deactivation	ms	≤ 1 +/- 0.5 Hz
Type of command			Passage through zero
Built-in protection			Varistor
Protection fuses			None (use an external fast-blow fuse)
Dielectric strength		Vrms	2,830 ~/3 cycles (2,000 m altitude)
Insulation resistance		MΩ	>10 at 500 V ---
Reliability			—
Consumption	Typical	mA	See power consumption table page 6/8
Maximum dissipated power			—

#### Characteristics of DC solid state output modules

Module			BMX DDO 1602	BMX DDO 1612	BMX DDO 3202K	BMX DDO 6402K
Number of inputs			16		32	64
Connection			Spring or screw-type 20-way removable terminal block		One 40-way connector	Two 40-way connectors
Output nominal values	Voltage	V	24 ---			
	Current	A	0.5		0.1	
	Logic		Positive ( <i>source</i> )		Negative ( <i>sink</i> )	Positive ( <i>source</i> )
Output limit values	Voltage (ripple included)	V	19...30 (possible up to 34 V, limited to 1 hour in every 24 hours)			
	Current per channel	A	0.625		0.125	
	Current per module	A	10		3.2	6.4 if $\theta \leq 40^{\circ}\text{C}$ 5.1 if $\theta \leq 50^{\circ}\text{C}$ 3.8 if $\theta \leq 60^{\circ}\text{C}$
Tungsten filament lamp power		W	6 maximum		1.2 maximum	
Leakage current	At state 0	mA	< 0.5		0.1 (for U = 30 V)	
Residual voltage	At state 1	V	< 1.2		< 1.5 (for I = 0.1 A)	
Minimum load impedance		$\Omega$	48		220	
Response time (1)		ms	1.2			
Maximum overload time		ms	—		15	
Compatibility with IEC 61131-2 DC inputs			Yes (type 3, not IEC)		Yes (not IEC)	Yes (type 3, not IEC)
Paralleling of outputs			Yes (2 max.)		Yes (3 max.)	
Switching frequency on inductive load		Hz	0.5/LI <sup>2</sup>			
Built-in protection	Against overvoltages		Yes, by Transil diode			
	Against inversions		Yes, by reverse-mounted diode. Use a 2 A fuse on the + 24 V of the preactuators.			
	Against short-circuit and overloads		Yes, with current limiter and electronic circuit-breaker 1.5 In < Id < 2 In		Yes, with current limiter and electronic circuit-breaker 0.125 A < Id < 0.185 A	
Preactuator voltage control threshold	At state 0	V	> 18			
	Fault	V	< 14			
Insulation resistance		M $\Omega$	> 10 at 500 V ---			
Dielectric strength	Output/ground or output/internal logic	Vrms	1,500 ~ - 50/60 Hz for 1 minute			
	Between groups of channels	V	—		500 ---	
Reliability	MTBF in hours	At T <sub>ambient</sub> = 30°C	409,413		—	360,412
Consumption		Typical	mA	See power consumption table page 6/8		
Maximum dissipated power		W	4	2.26	3.6	6.85
Temperature derating			None			
			See "Current per module" above			

(1) All outputs are equipped with a fast demagnetization circuit for the electromagnets. Discharge time for the electromagnets < L/R.

(2) Excluding load current.



#### Characteristics of relay output modules

Module			BMX DRA 0805					BMX DRA 1605			
Number of inputs				8					16		
Connection				Spring or screw-type 20-way removable terminal block							
Limit operating voltages		DC	V	10...34 ---					24...125 --- (resistive load)		
		AC	V	10...264 ~					200...264 ~ (Cos φ = 1)		
Thermal current			A	3					2		
Switching load		Minimum	mA	1 at 5 V ---							
Electrical life				—					24 V	200 V	240 V
AC load		Power cos φ = 0.7	VA	—					—	300 (1), 80 (2)	240 (1), 72 (2)
		Power cos φ = 0.35	VA	—					—	200 (1), 60 (2)	120 (1), 36 (2)
DC load		Power	W	—					24 (1), 7.2 (2)	—	—
Voltage				24 V	48 V	110... 120 V	200... 240 V	24 V	200 V	240 V	
AC load	Resistive loads AC-12	Power	VA	50 (3)	50 (4), 110 (5)	110 (4), 220 (5)	220 (4)	—			
	Inductive loads AC-15 (cos φ = 0.3)	Power	VA	24 (5)	10 (6), 24 (7)	10 (8), 50 (9), 110 (10)	10 (8), 50 (11), 110 (4), 220 (12)	—	200 (1), 60 (2)	120 (1), 36 (2)	
	Inductive loads AC-14 (cos φ = 0.7)	Power	VA	—				—	300 (1), 80 (2)	240 (1), 72 (2)	
DC load	Resistive loads DC-12	Power	W	24 (4), 40 (13)	—						
	Inductive loads DC-13 (14)	Power	W	10 (7), 24 (4)	—			24 (1), 7.2 (2)	—		
Response time		Activation	ms	< 10							
		Deactivation	ms	< 8					< 12		
Built-in protection	Against overloads and short-circuits			None. Use a fast-blow fuse per channel or group of channels							
	Against AC inductive overvoltages			None. Use an RC circuit or ZNO surge limiter appropriate to the voltage in parallel on each output							
	Against DC inductive overvoltages			None. Use a discharge diode on each output							
Insulation resistance			MΩ	> 10 at 500 V ---							
Dielectric strength			Vrms	2,000 - 50/60 Hz for 1 minute							
Reliability	MTBF in hours	At T <sub>ambient</sub> = 30°C		1,573,341					2,463,296		
Consumption		Typical	mA	See power consumption table page 6/8							
Dissipated power			W	2.7 max.					3		
Temperature derating				None							

(1) For 1 x 10<sup>5</sup> operating cycles  
(2) For 3 x 10<sup>5</sup> operating cycles  
(3) For 0.7 x 10<sup>6</sup> operating cycles  
(4) For 1 x 10<sup>6</sup> operating cycles  
(5) For 0.5 x 10<sup>6</sup> operating cycles  
(6) For 5 x 10<sup>6</sup> operating cycles  
(7) For 2 x 10<sup>6</sup> operating cycles  
(8) For 10 x 10<sup>6</sup> operating cycles  
(9) For 1.5 x 10<sup>6</sup> operating cycles  
(10) For 0.15 x 10<sup>6</sup> operating cycles  
(11) For 3 x 10<sup>6</sup> operating cycles  
(12) For 0.1 x 10<sup>6</sup> operating cycles  
(13) For 0.3 x 10<sup>6</sup> operating cycles  
(14) Where L/R = 60 ms for BMX DRA 0805 module, L/R = 7 ms for BMX DRA 1605 module

#### Characteristics of mixed I/O relay module

Module				BMX DDM 16025				
				24 V $\equiv$ inputs		24 V $\equiv$ or 24...240 V $\sim$ relay outputs		
Number of inputs/outputs				8		8		
Connection				Spring or screw-type 20-way removable terminal block				
Nominal values	Inputs	Voltage	V	24 $\equiv$ (positive logic)		–		
		Current	mA	3.5		–		
	Outputs	DC voltage	V	–		24 $\equiv$		
		Direct current	A	–		2 (resistive load)		
		AC voltage	V	–		220 $\sim$ , Cos $\varphi$ = 1		
		Alternating current	A	–		2		
Input limit values	At state 1	Voltage	V	$\geq 11$		–		
		Current	mA	$\geq 2$ (for U $\geq 11$ )		–		
	At state 0	Voltage	V	5		–		
		Current	mA	$\leq 1.5$		–		
	Sensor power supply (ripple included)		V	19...30 (possible up to 30 V, limited to 1 hour in every 24 hours)		–		
	Relay output voltage						24 V	200 V
AC load	Inductive loads AC-14 (cos $\varphi$ = 0.7)	Power	VA	–		–	300 (1), 80 (2)	240 (1), 72 (2)
		Power	VA	–		–	200 (1), 60 (2)	120 (1), 36 (2)
DC load	Inductive loads DC-13	Power	W	–		24 (1), 7.2 (2)	–	–
Maximum switching frequency				–		3,600 cycles/hour		
Input impedance at nominal voltage				K $\Omega$	6.8	–		
Input response time		Typical	ms	4		–		
		Maximum	ms	7		–		
Reverse polarity on inputs				Protected		–		
IEC 61131-2 conformity				Yes, type 3		–		
Compatibility with 2-wire/3-wire sensors				IEC 947-5-2		–		
Paralleling of inputs				No		–		
Input type				Current sink		–		
Output response time		Activation	ms	–		$\leq 12$		
		Deactivation	ms	–		$\leq 10$		
Switching load		Minimum	–		5 V $\equiv$ /1 mA			
		Maximum	V	–		264 $\sim$ /125 $\equiv$		
Mechanical durability		No. of switching operations	–		$\geq 20$ million			
Fuse protection				Use a external 0.5 A fast-blow fuse per group of channels		No (use one fast-blow fuse per channel or group of channels)		
Sensor voltage control thresholds		OK	V	$> 18$		–		
		Fault	V	$< 14$		–		
Insulation resistance				M $\Omega$	$> 10$ at 500 V $\equiv$			
Dielectric strength	Primary/secondary		Vrms	1,500 - 50/60 Hz for 1 minute		–		
	Between groups of I/O		V	500 $\equiv$		–		
	Max. voltage		Vrms	–		2,830 $\sim$ /cycle		
Reliability	MTBF in hours	At T <sub>ambient</sub> = 30°C	912,167					
Consumption				Typical	mA	See power consumption table page 6/8		
Dissipated power				W	3.1 maximum			
Temperature derating				None				

(1) For 1 x 10<sup>5</sup> operating cycles(2) For 3 x 10<sup>5</sup> operating cycles

(3) Excluding load current

#### Characteristics of 24 V $\pm$ mixed I/O modules

Module			BMX DDM 16022		BMX DDM 3202K		
			Inputs	Solid state outputs	Inputs	Solid state outputs	
Number of inputs/outputs			8	8	16	16	
Connection			Spring or screw-type 20-way removable terminal block		One 40-way connector		
Nominal values		Voltage	V	24 ---			
		Current	mA	3.5	500	2.5	100
		Logic		Positive (sink)	Positive (source)	Positive (sink)	Positive (source)
Tungsten filament lamp power		W	—	6 maximum	—	1.2 maximum	
Input limit values	At state 1	Voltage	V	≥ 11	—	≥ 11	—
		Current	mA	> 3 (for U ≥ 11 V)	—	≥ 2 (for U ≥ 11)	—
	At state 0	Voltage	V	5	—	5	—
		Current	mA	≤ 1.5	—	≤ 1.5	—
	Sensor power supply (ripple included)	Possible up to 30 V, limited to 1 hour in every 24 hours	V	19...30	—	19...30	—
Output limit values	Voltage (ripple included)	Possible up to 30 V, limited to 1 hour in every 24 hours	V	—	19...30	—	19...30
	Currents	Per channel	mA	—	625	—	125
		Per module	A	—	5	—	3.2
Input impedance at nominal voltage		KΩ	6.8	—	9.6	—	
Input response time	Typical	ms	4	—	4	—	
	Maximum	ms	7	—	7	—	
Reverse polarity on inputs			Protected	—	Protected	—	
IEC 61131-2 conformity			Yes, type 3	—	Yes, type 3	—	
Compatibility with 2-wire/3-wire sensors			IEC 947-5-2	—	IEC 947-5-2	—	
Input type			Current sink	—	Current sink	—	
Leakage current	At state 0	mA	—	< 0.5	—	0.1	
Residual voltage	At state 1	V	—	< 1.2	—	< 1.5 (for I=0.1 A)	
Minimum load impedance			Ω	—	48	—	
Output response time (1)			ms	—	1.2	—	
Max. overload time before fault state			ms	—	15	—	
Compatibility with IEC 61131-2 DC inputs			—	Yes (type 3, not IEC)	—	Yes (type 3, not IEC)	
Paralleling of outputs			—	Yes (2 maximum)	—	Yes (3 maximum)	
Switching frequency on inductive load			Hz	—	0.5/LI <sup>2</sup>	—	
Built-in protection		Against overvoltages	—	—	Yes, by Transil diode	—	
		Against inversions	—	—	Yes, by reverse-mounted diode. Use a 2 A fuse on the preactuator + 24 V	—	
		Against short-circuits and overloads	—	Use a external 0.5 A fast-blow fuse per group of channels	Yes, by current limiter and electronic circuit-breaker 1.5 In< Id < 2 In	Use a external 0.5 A fast-blow fuse per group of channels	Yes, by current limiter and electronic circuit-breaker 0.125 A < Id < 0.185 A
Sensor and preactuator voltage control thresholds		OK	V	> 18			
		Fault		< 14			
Insulation resistance			MΩ	> 10 at 500 V ---			
Dielectric strength	Primary/secondary		Vrms	1,500 - 50/60 Hz for 1 minute			
	Between groups of inputs and outputs		V	500 ---			
	Outputs/ground or outputs/internal logic			—	1,500 - 50/60 Hz for 1 minute	—	
Reliability	MTBF in hours	At T <sub>ambient</sub> = 30°C		447,581		432,904	
Consumption	3.3 V ---	Typical	mA	79		125	
		Maximum	mA	111		166	
	24 V --- preactuators (2)	Typical	mA	59		69	
		Maximum	mA	67		104	
Maximum dissipated power			W	3.7	4		
Temperature derating				None			

(1) All outputs are equipped with a fast demagnetization circuit for the electromagnets. Discharge time for the electromagnets  $< L/R$ .

(2) Excluding load current.

# Modicon M340

## automation platform

### Discrete I/O modules

2

2.1



BMX DDI 160



BMX DDI 3202K



BMX DDI 6402K

## References

## Discrete input modules

Type of current	Input voltage	Connection by (1)	IEC 61131-2 conformity	Modularity (no. of channels)	Reference	Weight kg
≡	24 V (positive logic)	Screw or spring-type 20-way removable terminal block	Type 3	16 isolated inputs	<b>BMX DDI 1602</b>	0.115
		One 40-way connector	Type 3	32 isolated inputs	<b>BMX DDI 3202K</b>	0.112
		Two 40-way connectors	Non-IEC	64 isolated inputs	<b>BMX DDI 6402K</b>	0.145
≡	24 V (negative logic)	Screw or spring-type 20-way removable terminal block	Non-IEC	16 isolated inputs	<b>BMX DAI 1602 ▲</b>	0.115
	48 V (positive logic)	Screw or spring-type 20-way removable terminal block	Type 1	16 isolated inputs	<b>BMX DDI 1603 ▲</b>	0.115
	24 V	Screw or spring-type 20-way removable terminal block	Type 1	16 isolated inputs	<b>BMX DAI 1602 ▲</b>	0.115
~	48 V	Screw or spring-type 20-way removable terminal block	Type 3	16 isolated inputs	<b>BMX DAI 1603 ▲</b>	0.115
	100...120 V	Screw or spring-type 20-way removable terminal block	Type 3	16 isolated inputs	<b>BMX DAI 1604</b>	0.115



BMX DDO 1602



BMX DRA 0805/1605



BMX DDO 3202K



BMX DDO 6402K

## Discrete output modules

Type of current	Output voltage	Connection by (1)	IEC 61131-2 conformity	Modularity (no. of channels)	Reference	Weight kg
≡ solid state	24 V/0.5 A (positive logic)	Screw or spring-type 20-way removable terminal block	Yes	16 protected outputs	<b>BMX DDO 1602</b>	0.120
	24 V/0.5 A (negative logic)	Screw or spring-type 20-way removable terminal block	Non-IEC	16 protected outputs	<b>BMX DDO 1612 ▲</b>	0.120
	24 V/0.1 A (positive logic)	One 40-way connector	Yes	32 protected outputs	<b>BMX DDO 3202K</b>	0.110
		Two 40-way connectors	Yes	64 protected outputs	<b>BMX DDO 6402K</b>	0.150
~ triac	100...240	Screw or spring-type 20-way removable terminal block	—	16 outputs	<b>BMX DAO 1605 ▲</b>	0.140
≡ or ~ relay	12...24 V ≡/3 A, 24...240 V ~/3 A	Screw or spring-type 20-way removable terminal block	Yes	8 non-protected outputs	<b>BMX DRA 0805</b>	0.145
	24 V ≡/2 A, 240 V ~/2 A	Screw or spring-type 20-way removable terminal block	Yes	16 non-protected outputs	<b>BMX DRA 1605</b>	0.150

(1) By connector, module supplied with cover(s)

▲ Available 4<sup>th</sup> quarter 2007

# Modicon M340

## automation platform

### Discrete I/O modules

BMX  
DDM 16022BMX  
DDM 3202K

BMX FTB 2000



BMX FTW 001



BMX FCW 001



BMX FCW 003



BMX FCC 001

## References (continued)

## Discrete mixed I/O modules

Number of I/O	Connection via (1)	No. and type of inputs	No. and type of outputs	IEC 1131 2 conformity	Reference	Weight kg
16	Screw or spring-type 20-way removable terminal block	8 (positive logic)	8, solid state 24 V $\overline{\text{DC}}$ / 0,5 A 8, relay 24 V $\overline{\text{DC}}$ or 24...240 V $\sim$	Inputs, type 3	BMX DDM 16022	0.115
32	One 40-way connector	16 (positive logic)	16, solid state 24 V $\overline{\text{DC}}$ / 0,1 A	Inputs, type 3	BMX DDM 3202K	0.110

## Removable connection blocks

Description	Use	Reference	Weight kg
20-way removable terminal blocks	Cage clamp	For module with 20-way removable terminal block	BMX FTB 2000 0.093
	Screw clamp	For module with 20-way removable terminal block	BMX FTB 2010 0.075
	Spring-type	For module with 20-way removable terminal block	BMX FTB 2020 0.060

## Preformed cordsets for I/O modules with removable terminal block

Description	Composition	Length	Reference	Weight kg
Preformed cordsets with one end with flying leads	One 20-way terminal block	3 m	BMX FTW 301	0.850
	One end with color-coded flying leads	5 m	BMX FTW 501	1.400
		10 m	BMX FTW 1001	2.780

## Preformed cordsets for I/O modules with 40-way connectors

Description	No. of sheaths	Composition	Cross-section	Length	Reference	Weight kg
Preformed cordsets with one end with flying leads	1 x 20 wires (16 channels)	One 40-way connector One end with color-coded flying leads	0.324 mm <sup>2</sup>	3 m	BMX FCW 301	0.820
				5 m	BMX FCW 501	1.370
				10 m	BMX FCW 1001	2.770
	2 x 20 wires (32 channels)	One 40-way connector Two ends with color-coded flying leads	0.324 mm <sup>2</sup>	3 m	BMX FCW 303	0.900
				5 m	BMX FCW 503	1.490
				10 m	BMX FCW 1003	2.960
Preformed cordsets for Telefast Advantys ABE 7 sub-bases	1 x 20 wires (16 channels)	One 40-way connector One HE 10 connector	0.324 mm <sup>2</sup>	0.5 m	BMX FCC 051	0.140
				1 m	BMX FCC 101	0.195
				2 m	BMX FCC 201	0.560
				3 m	BMX FCC 301	0.840
				5 m	BMX FCC 501	1.390
				10 m	BMX FCC 1001	2.780
	2 x 20 wires (32 channels)	One 40-way connector Two HE 10 connectors	0.324 mm <sup>2</sup>	0.5 m	BMX FCC 053	0.210
				1 m	BMX FCC 103	0.350
				2 m	BMX FCC 203	0.630
				3 m	BMX FCC 303	0.940
				5 m	BMX FCC 503	1.530
				10 m	BMX FCC 1003	3.000


# Modicon M340

## automation platform


### Discrete I/O modules

#### Input modules


##### BMX DDI 1602

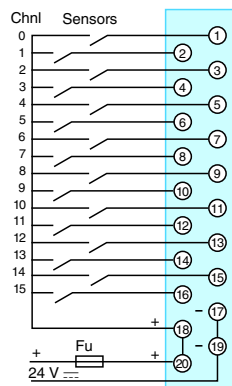

##### BMX DDI 1603

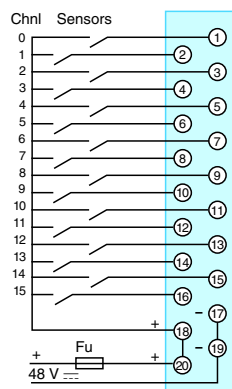


##### BMX DAI 1602/1603/1604

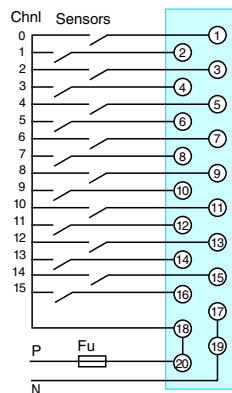

P-N voltage:  
 24 V ~: **BMX DAI 1602**  
 48 V ~: **BMX DAI 1603**  
 100/120 V ~: **BMX DAI 1604**  
 Fu: 0.5 A fast-blow fuse

##### BMX DDI 3202K/6402K

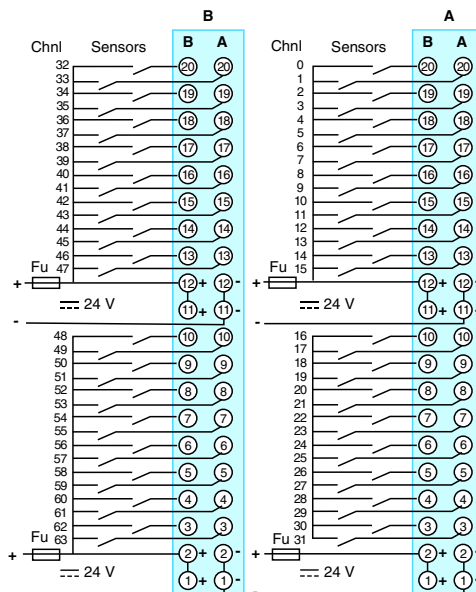


**BMX DDI 3202K:** Connector **A** (inputs I0...I32)

**BMX DDI 6402K:** Connector **A** (inputs I0...I32) and connector **B** (inputs I33...I63)


For correspondence of the FCN 40-way connector pins with the wire colors of **BMX FCW 001/003** prewired cordsets, in accordance with DIN 47100, see table on page 2/22.

##### BMX DAI 1602, use in 24 V ~, negative logic

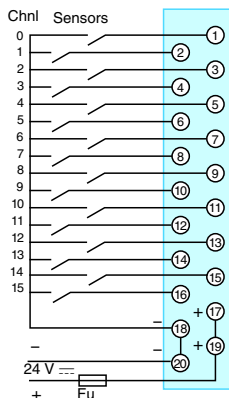


#### Output modules


##### BMX DDO 1602

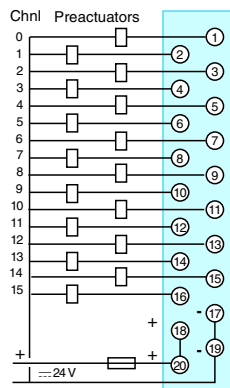


##### BMX DDO 1612

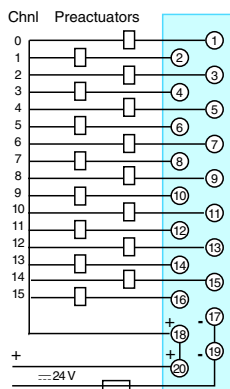

##### BMX DAO 1605

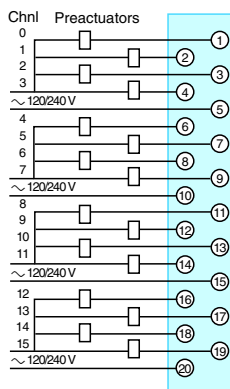

##### BMX DDO 3202K/6402K

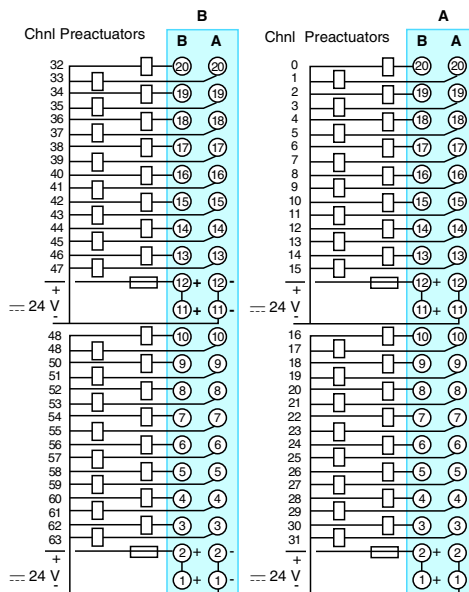


**BMX DDO 3202K:** Connector A (outputs Q0...Q32)

**BMX DDO 6402K:** Connector A (outputs Q0...Q32) and connector B (outputs Q33...Q63)


**Note:** For correspondence of the FCN 40-way connector pins with the wire colors of

**BMX FCW 01/03** prewired cordsets, in accordance with DIN 47100, see table on page 2/22.

##### BMX DRA 0805

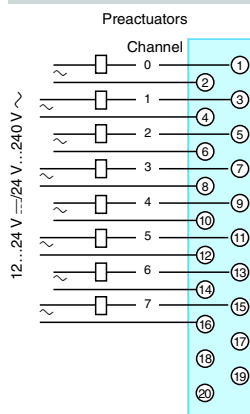

##### BMX DRA 1605

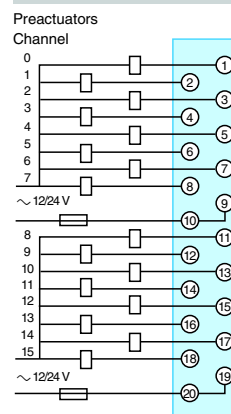


# Modicon M340

## automation platform


### Discrete I/O modules

## Mixed I/O modules


BMX DDM 16025

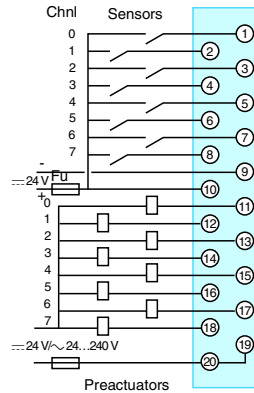

BMX DDM 16022

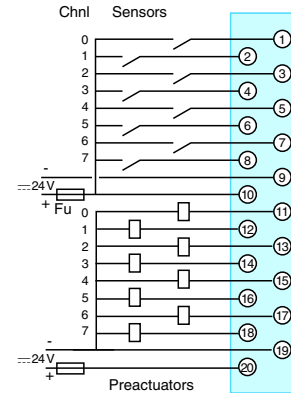

BMX DDM 3202K

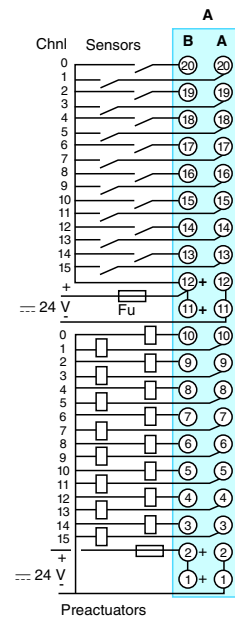

Fu: 0.5 A fast-blow fuse



# Modicon M340



## automation platform

### Discrete I/O modules

Cordset color codes in accordance with DIN 47100

#### Connection cables with 40-way connector and end(s) with flying leads BMX FCW ●01/●03

Correspondence of connector pins with the wire colors at the sheath end

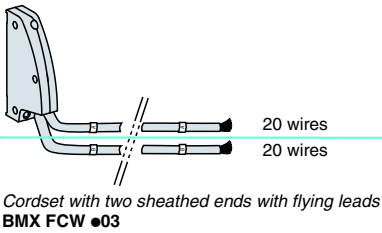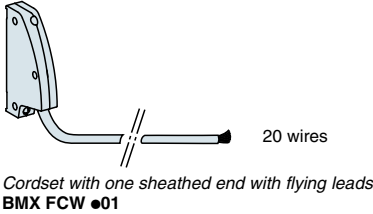


Connector pin no.	Color at sheath end	32/64-channel inputs	32/64-channel outputs	32-channel I/O
B20	White	Input 0/32	Output 0/32	Input 0
A20	Brown	Input 1/33	Output 1/33	Input 1
B19	Green	Input 2/34	Output 2/34	Input 2
A19	Yellow	Input 3/35	Output 3/35	Input 3
B18	Gray	Input 4/36	Output 4/36	Input 4
A18	Pink	Input 5/37	Output 5/37	Input 5
B17	Blue	Input 6/38	Output 6/38	Input 6
A17	Red	Input 7/39	Output 7/39	Input 7
B16	Black	Input 8/40	Output 8/40	Input 8
A16	Purple	Input 9/41	Output 9/41	Input 9
B15	Gray/pink	Input 10/42	Output 10/42	Input 10
A15	Red/blue	Input 11/43	Output 11/43	Input 11
B14	White/green	Input 12/44	Output 12/44	Input 12
A14	Brown/green	Input 13/45	Output 13/45	Input 13
B13	White/yellow	Input 14/46	Output 14/46	Input 14
A13	Yellow/brown	Input 15/47	Output 15/47	Input 15
B12	White/gray	+ 24 V	+ 24 V	+ 24 V
A12	Gray/brown	- 24 V	- 24 V	- 24 V
B11	White/pink	+ 24 V	+ 24 V	+ 24 V
A11	Pink/brown	- 24 V	- 24 V	- 24 V
B10	White	Input 16/48	Output 16/48	Output 0
A10	Brown	Input 17/49	Output 17/49	Output 1
B9	Green	Input 18/50	Output 18/50	Output 2
A9	Yellow	Input 19/51	Output 19/51	Output 3
B8	Gray	Input 20/52	Output 20/52	Output 4
A8	Pink	Input 21/53	Output 21/53	Output 5
B7	Blue	Input 22/54	Output 22/54	Output 6
A7	Red	Input 23/55	Output 23/55	Output 7
B6	Black	Input 24/56	Output 24/56	Output 8
A6	Purple	Input 25/57	Output 25/57	Output 9
B5	Gray/pink	Input 26/58	Output 26/58	Output 10
A5	Red/blue	Input 27/59	Output 27/59	Output 11
B4	White/green	Input 28/60	Output 28/60	Output 12
A4	Brown/green	Input 29/61	Output 29/61	Output 13
B3	White/yellow	Input 30/62	Output 30/62	Output 14
A3	Yellow/brown	Input 31/63	Output 31/63	Output 15
B2	White/gray	+ 24 V	+ 24 V	+ 24 V
A2	Gray/brown	- 24 V	- 24 V	- 24 V
B1	White/pink	+ 24 V	+ 24 V	+ 24 V
A1	Pink/brown	- 24 V	- 24 V	- 24 V

#### Connection cables with 20-way terminal block at one end and flying leads at the other BMX FTW ●01

Correspondence of 20-way removable terminal block pins with the wire colors (at sheath end)

Correspondence of terminal block pins with the wire colors at the sheath end

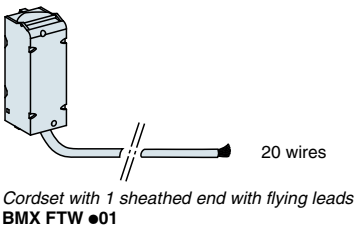

Terminal block pin no.	Color at sheath end	16-channel inputs	8- or 16-channel outputs	16-channel I/O
1	White	Input 0	See page 2/20	Input 0
2	Brown	Input 1	See page 2/20	Input 1
3	Green	Input 2	See page 2/20	Input 2
4	Yellow	Input 3	See page 2/20	Input 3
5	Gray	Input 4	See page 2/20	Input 4
6	Pink	Input 5	See page 2/20	Input 5
7	Blue	Input 6	See page 2/20	Input 6
8	Red	Input 7	See page 2/20	Input 7
9	Black	Input 8	See page 2/20	Sensor + common power supply
10	Purple	Input 9	See page 2/20	Sensor pwr supply
11	Gray/pink	Input 10	See page 2/20	Output 0
12	Red/blue	Input 11	See page 2/20	Output 1
13	White/green	Input 12	See page 2/20	Output 2
14	Brown/green	Input 13	See page 2/20	Output 3
15	White/yellow	Input 14	See page 2/20	Output 4
16	Yellow/brown	Input 15	See page 2/20	Output 5
17	White/gray	Power supply	See page 2/20	Output 6
18	Gray/brown	+ common pwr sup.	See page 2/20	Output 7
19	White/pink	Power supply	See page 2/20	Preactuator pwr sup.
20	Pink/brown	Power supply	See page 2/20	Preactuator pwr sup.

# Modicon M340

## automation platform

### Analog I/O modules

2

2.2

Applications		Analog inputs	
			
Type of I/O		Isolated low-level voltage inputs, resistors, thermocouples and temperature probes	
Type		Multi-range	
Range	Voltage	$\pm 40 \text{ mV}$ , $\pm 80 \text{ mV}$ , $\pm 160 \text{ mV}$ , $\pm 320 \text{ mV}$ , $\pm 640 \text{ mV}$ and $\pm 1.28 \text{ V}$	
	Current	—	
	Thermocouple, Temperature probe, Resistor	Thermocouples type B, E, J, K, L, N, R, S, T, U Temperature probes type Pt 100, Pt 1000, Ni 100, Ni 1000 and Cu 10, 2-, 3- or 4-wire Resistors 2-, 3- or 4-wire, $400 \Omega$ or $4,000 \Omega$	
Modularity		4 channels	8 channels
Acquisition period		400 ms for all 4 channels	400 ms for all 8 channels
Conversion time		—	
Resolution		16 bits	
Isolation		Between channels: $750 \text{ V ---}$ Between channels and bus: $2,000 \text{ V ---}$ Between channels and ground: $750 \text{ V ---}$	
Connection	Directly to the module	Via 40-way connector	Via two 40-way connectors
	Via preformed cordsets	BMX FCW ●01S cordsets with one end with color-coded flying leads (3 or 5 m long)	
Module		BMX ART 0414	BMX ART 0814 ▲
Page		2/32	
			
Compatibility with Advantys Telefast ABE 7 pre-wired system		Sub-base with 4 channels for direct connection of 4 thermocouples plus connection and provision of cold-junction compensation	
Type of module	Connection sub-base	ABE 7CPA412	
	Preformed cordsets (1.5, 3 or 5 m long)	BMX FCA●●2	
Pages		5/16 and 2/32	

▲ Available 4<sup>th</sup> quarter 2007

## Analog inputs



## Isolated high-level inputs

## Voltage/current

 $\pm 10\text{ V}$ ,  $0\ldots 10\text{ V}$ ,  $0\ldots 5\text{ V}$ ,  $1\ldots 5\text{ V}$ ,  $\pm 5\text{ V}$ 
 $0\ldots 20\text{ mA}$ ,  $4\ldots 20\text{ mA}$ ,  $\pm 20\text{ mA}$ 

–

4 channels

 Fast:  $1 + (1 \times \text{no. of declared channels})\text{ ms}$   
 By default, 5 ms for all 4 channels

–

16 bits

 Between channels:  $300\text{ V} \text{ ---}$   
 Between channels and bus:  $2,000\text{ V} \text{ ---}$   
 Between channels and ground:  $2,000\text{ V} \text{ ---}$ 

## Analog outputs



## Isolated high-level outputs

## Voltage/current

 $\pm 10\text{ V}$ 
 $0\ldots 20\text{ mA}$ ,  $4\ldots 20\text{ mA}$ 

–

2 channels

–

 $\leq 1\text{ ms}$ 

16 bits

 Between channels:  $1,400\text{ V} \text{ ---}$   
 Between channels and bus:  $2,000\text{ V} \text{ ---}$   
 Between channels and ground:  $2,000\text{ V} \text{ ---}$ 

## Mixed analog I/O



## Non-isolated high-level inputs

## Voltage/current

 $\pm 10\text{ V}$ ,  $0\ldots 10\text{ V}$ ,  $0\ldots 5\text{ V}$ ,  $1\ldots 5\text{ V}$ 
 $0\ldots 20\text{ mA}$ ,  $4\ldots 20\text{ mA}$ 

–

4 channels

 Fast:  $1 + (1 \times \text{no. of declared channels})\text{ ms}$   
 By default, 5 ms for all 4 channels

–

 14 bits in  $10\text{ V}$  range  
 12 bits in  $20\text{ mA}$  range

 Between group of input channels and group of output channels:  $1,400\text{ V} \text{ ---}$   
 Between channels and bus:  $2,000\text{ V} \text{ ---}$   
 Between channels and ground:  $2,000\text{ V} \text{ ---}$ 

## Non-isolated high-level outputs

 $\pm 10\text{ V}$ 
 $0\ldots 20\text{ mA}$ ,  $4\ldots 20\text{ mA}$ 

–

2 channels

–

 $\leq 2\text{ ms}$ 

12 bits

Via 20-way removable terminals (screw or spring-type)

BMX FTW ●01S cordsets with one end with color-coded flying leads (3 or 5 m long)

BMX AMI 0410

BMX AMO 0210

BMX AMM 0600 ▲

2/32



4-channel sub-base for direct connection of 4 inputs, delivers and distributes 4 protected isolated power supplies

ABE 7CPA410

BMX FCA●●0

5/16 and 2/32

#### Presentation

The analog I/O module offer consists of:

- Three isolated analog input modules:
  - 4 analog high-speed channels (16 bits), voltage or current, **BMX AMI 0410**
  - 4 and 8 analog channels (15 bits + sign) for thermocouples, Pt, Ni or Cu temperature probes, **BMX ART 0414/0814**
- One analog output module with 2 voltage/current channels, **BMX AMO 0210**
- One mixed module (12 bits) with 4 analog input channels and 2 analog output channels, non-isolated, voltage or current, **BMX AMM 0600**

Analog I/O modules are equipped with a connector for a 20-way removable terminal block, except for **BMX ART 0414/0814** analog input modules with thermocouples/temperature probes, which are equipped with a 40-way connector.

All analog modules occupy a single slot in the **BMX XBP ●●●** racks. These modules can be installed in any slot in the rack, except the first two (PS and 00) reserved for the power supply module in the **BMX CPS ●●0** rack and the **BMX P34 ●●0** processor module respectively.

The power supply for the analog functions is supplied by the backplane bus (3.3 V and 24 V). Analog I/O modules are hot-swappable (see page 2/9).

In a Modicon M340 single-rack configuration, the maximum number of analog channels is limited by the number of slots available in the rack (11 slots maximum).

#### Description

**BMX AM●/ART** analog I/O modules are standard format (1 slot). They have a case, which ensures IP 20 protection of the electronics, and are locked into position by a captive screw.

##### I/O modules connected via 20-way removable terminal block

**BMX AM●** analog I/O modules have the following on the front panel:

- 1 A rigid body providing support and protection for the electronic card
- 2 A module reference marking (a label is also visible on the right-hand side of the module).
- 3 A module and channel status display block
- 4 A connector taking the 20-way removable terminal block, for connecting sensors or preactuators on screw or spring-type terminals

To be ordered separately:

- 5 A **BMX FTB 20●0** 20-way removable terminal block or preformed cordsets with 20-way terminal block at one end and flying leads at the other (**BMX FTW ●01S** or, with 25-way SUB-D connector, **BMX FCA ●●0**) for direct connection to Advantys Telefast ABE 7 sub-bases (see page 2/31).

##### I/O modules connected via 40-way connector

**BMX ART 0●14** analog input modules have the following on the front panel:


- 1 A rigid body providing support and protection for the electronic card
- 2 A module reference marking (a label is also visible on the right-hand side of the module)
- 3 A module and channel status display block
- 4 A 40-way connector for connecting the sensors


To be ordered separately:

- 5 Preformed cordsets with 40-way connector at one end and flying leads at the other (**BMX FCW ●01S** or, with 25-way SUB-D connector, **BMX FCA ●●2**) for direct connection to Advantys Telefast ABE 7 sub-bases (see page 2/32).

To be ordered separately irrespective of the type of module:

- A shielding connection kit to protect against electrostatic discharge, consisting of a metal bar and two sub-bases for mounting on the rack supporting the analog modules
- A set of **STB XSP 3020** clamping rings for the shielding braids of analog signal cables.

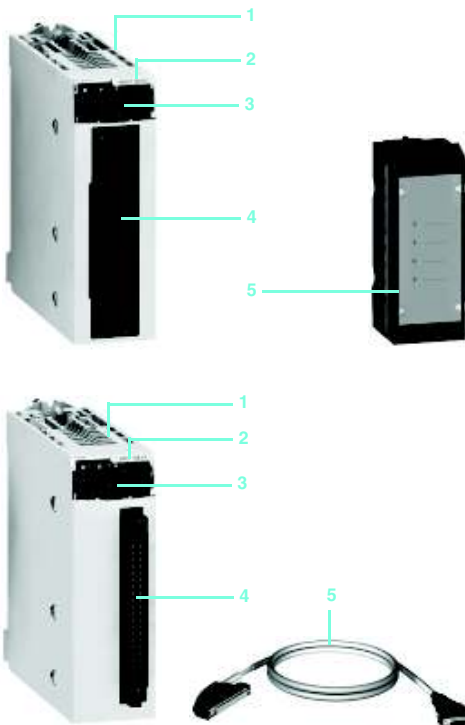

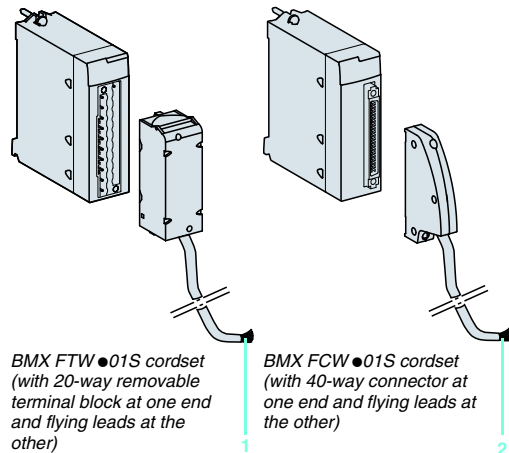

#### Connecting modules with removable terminal blocks

##### BMX AMI 0410/AMO 0210/AMM 0600 modules with 20-way terminal block

These 20-way removable terminal blocks are the same as those used for discrete I/O modules (screw clamp, cage clamp or spring-type). See page 2/8.

One version of the removable terminal block is equipped with a 3 or 5 m long cordset with color-coded flying leads (**BMX FTW 01S**). These preformed cordsets, with reinforced shielding have, at the other end **1**, color-coded flying leads conforming to standard DIN 47100.


#### Connecting modules with 40-way connectors

##### BMX ART 0014 modules with 40-way connectors

Two types of cordset are available:

- Preformed cordsets with reinforced shielding (**BMX FCW 01S**) have, at the other end **2**, color-coded flying leads conforming to standard DIN 47100. They are available in 3 or 5 m lengths, and provide easy direct wire-to-wire connection of the analog sensors via terminal blocks.

- Preformed cordsets with reinforced shielding (**BMX FCA 002**) which have at the other end **3**, a 25-way SUB-D connector. They are available in 1.5, 3 or 5 m lengths, and provide direct connection to the Advantys Telefast **ABE 7CPA412** sub-base (see below).

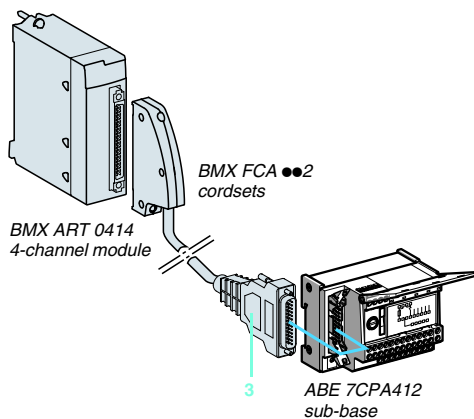

#### Use with Advantys Telefast ABE 7 sub-bases

Using the Advantys Telefast ABE 7 pre-wired system makes it easier to install the modules since the inputs (or outputs) can be accessed using screw terminals. Two special sub-bases are available:

##### Advantys Telefast ABE 7CPA410 sub-base

The Advantys Telefast **ABE 7CPA410** sub-base is mainly used in conjunction with the **BMX AMI 0410** voltage/current analog 4-input module. It is used to:

- Connect the four sensors directly
- Remotely locate the input terminals in voltage mode
- Power the 4...20 mA conditioners one channel at a time with a 24 V voltage, protected and limited to 25 mA, while maintaining isolation between channels
- Protect the current impedance matching resistors integrated in the sub-base against overvoltages

Connection is via the **BMX FCA 000** cordset (1.5, 3 or 5 m long).

##### Advantys Telefast ABE 7CPA412 sub-base

The Advantys Telefast **ABE 7CPA412** sub-base is specially designed as a wiring interface for the **BMX ART 0414** and **BMX ART 0814** thermocouple modules. It is used to:

- Connect the four thermocouple probes
- Provide external cold-junction compensation with a temperature probe integrated in the sub-base
- Ensure continuity of the shielding

The **BMX ART 0814** module requires two Advantys Telefast **ABE 7CPA412** sub-bases. The connection with each sub-base is made via a **BMX FCA 002** cordset (1.5, 3 or 5 m long).

#### BMX AMI 0410 analog input modules

The **BMX AMI 0410** module is a high-level analog input module with 4 isolated inputs (16 bits).

Used with sensors or transmitters, it performs monitoring, measurement and process control functions for continuous processes.

For each input, the **BMX AMI 0410** module offers the following ranges:

- Voltage  $\pm 10$  V,  $\pm 5$  V, 0...10 V, 0...5 V and 1...5 V
- Current 0...20 mA, 4...20 mA and  $\pm 20$  mA, depending on the choice made during configuration

The module operates with voltage inputs. It includes four reading resistors connected to the terminal block to form the current inputs.

#### Functions

The **BMX AMI 0410** module includes the following functions:

- Adaptation and multiplexing:
  - Physical connection to the process
  - Protection of the module against overvoltages
  - Protection of the current reading resistors
  - Adaptation of input signals by analog filtering
  - Scanning of input channels by solid state multiplexing, by optical commutator switches
- Adaptation to input signals: Gain selection, drift compensation
- Conversion: 24-bit analog/digital converter
- Conversion of input measurements to a unit that is suitable for the user:
  - Taking account of the alignment coefficients to be applied to measurements, as well as the module autocalibration coefficients
  - Measurement filtering, depending on the configuration parameters
  - Measurement scaling, depending on the configuration parameters
- Interface and communication with the application:
  - Receipt of the configuration parameters for the module and its channels
  - Transmission of measured values to the application, as well as module status
- Module power supply
- Module monitoring and indication of any faults to the application:
  - Conversion circuit test
  - Channel range overshoot test and watchdog test.

#### BMX ART 0414/0814 analog input modules

**BMX ART 0414/0814** modules are multirange input modules with 4 or 8 low-level isolated inputs (15 bits + sign) respectively.

Depending on the choice made during configuration, the modules offer, for each of the inputs, the following range:

- Temperature probe: Pt100, Pt1000, Cu10, Ni100 or Ni1000, with open-circuit detection
- Thermocouple: B, E, J, K, L, N, R, S, T or U, with broken wire detection
- Resistor: 0...400 or 0...4000  $\Omega$ , 2-, 3- or 4-wire
- Voltage:  $\pm 40$  mV,  $\pm 80$  mV,  $\pm 160$  mV,  $\pm 320$  mV,  $\pm 640$  mV,  $\pm 1.28$  V.

#### Functions

**BMX ART 0414/0814** modules offer the following functions

- Adaptation and current source per channel:
  - Accepting an overload of  $\pm 7.5$  V
  - Autocalibration of the analog module offset as close as possible to the input terminal
  - Selection of the cold-junction compensation sensor included in the Advantys Telefast **ABE 7 CPA412** sub-base or externally by the Pt 100 probe
- Adaptation to input signals: Based on a low offset amplifier internal to the A/D converter
- Conversion: 16-bit converter
- Conversion of input measurements to a unit that is suitable for the user:
  - Taking account of the alignment coefficients to be applied to measurements, as well as the module autocalibration coefficients
  - Measurement filtering, depending on the configuration parameters
  - Measurement scaling, depending on the configuration parameters
- Interface and communication with the application:
  - Receipt of the configuration parameters for the module and its channels
  - Transmission of measured values to the application, as well as module status
- Module monitoring and indication of any faults to the application:
  - Conversion circuit test
  - Channel range overshoot test and watchdog test.

#### BMX AMO 0210 analog output module

The **BMX AMO 0210** module is a module with 2 high-level isolated outputs (15 bits + sign). It offers, for each of them, the ranges:

- ☐ Voltage:  $\pm 10$  V
- ☐ Current: 0...20 mA and 4...20 mA

The range is selected during configuration.

#### Functions

The **BMX AMO 210** module includes the following functions:

- Physical connection to the process
- Protection of the module against overvoltages
- Adaptation of the output signals:
  - ☐ Voltage or current adaptation by software configuration
  - ☐ Protection of the outputs against short-circuits and overloads
- Conversion to 15 bits with sign with redefinition of data
- Conversion of application values into data that can be used by the digital/analog converter:
  - ☐ Use of factory calibration parameters
- Interface and communication with the application:
  - ☐ Managing exchanges with the processor
  - ☐ Geographical addressing
  - ☐ Receipt of the configuration parameters for the module and its channels
  - ☐ Transmission of module status to the application
- Module monitoring and indication of any faults to the application:
  - ☐ Output power supply test
  - ☐ Channel range overshoot test
  - ☐ Output fault presence test
  - ☐ Watchdog test.

#### BMX AMM 0600 mixed analog I/O module

The **BMX AMM 0600** mixed module is a module with 4 inputs 14/12 bits and 2 outputs 12 bits, non-isolated between one another. It offers, for each of them, the ranges:

- ☐ Voltage:  $\pm 10$  V, 0...10 V, 0...5 V and 1...5 V
- ☐ Current: 0...20 mA and 4...20 mA.

#### Functions

The **BMX AMM 0600** module has the following functions:

- Protection of the module against overvoltages
- Adaptation to the different actuators: voltage or current output
- Conversion of digital signals (10 bits or 12 bits depending on the range) to analog signals
- Conversion of application data into data that can be used by the digital/analog converter
- Module monitoring and fault indication to the application: Converter test, range overshoot test, watchdog test.

2

2.2

#### Characteristics of BMX AMI 0410 analog input modules

Input module		BMX AMI 0410								
Input type		Isolated high-level inputs								
Number of channels		4								
Nature of inputs	Voltage	± 10 V, 0...10 V, 0...5 V, 1...5 V, ± 5 V								
	Current	0...20 mA, 4...20 mA, ± 20 mA (via protected internal 250 Ω resistors)								
Analog/digital conversion		24 bits								
Voltage/current range		± 10 V	± 5 V	0...5 V	0...10 V	1...5 V	0...20 mA	4...20 mA	± 20 mA	
Maximum conversion value		± 11.4 V						± 30 mA		
Resolution		0.35 mV						0.92 µA		
Input impedance	Typical	MΩ 10 (irrespective of the input level)								
Permitted overload on the inputs	Voltage range	V ± 30 ---								
	Current range	mA ± 90 or short-circuit to + 24 V ---								
Voltage/current internal conversion resistor		Ω	—						250	
Precision of internal conversion resistor		—						0.1% - 15 ppm/°C		
Filtering		1 <sup>st</sup> order digital filtering								
Read cycle time	Fast	ms	1 + 1 x no. of channels used (periodic reading of no. of declared channels)							
	Default	ms	5 for 4 channels (periodic reading of all channels)							
Measurement errors (1)	At 25°C	%FS	0.075%					0.15% (2)		
	Maximum at 0...60°C	%FS	0.1%					0.3% (2)		
Temperature drift		15 ppm/°C						30 ppm/°C		
Recalibration		Internal								
Common mode between channels		dB	120							
Digital value format		± 10,000 by default, ± 32,000 in user scale								
Isolation	Between channels	V	± 300 ---							
	Between channels and bus	V	2,000 ---							
	Between channels and ground	V	2,000 ---							
Consumption	Typical	mA	See power consumption table page 6/8							

#### Characteristics of BMX ART 0414/0814 analog input modules

Input module			BMX ART 0414		BMX ART 0814	
Input type			Isolated inputs, low-level voltage, resistors, temperature probes, thermocouples			
Number of channels			4		8	
Nature of inputs			± 40 mV; ± 80 mV; ± 160 mV; ± 320 mV; ± 640 mV; ± 1.28 V			
Analog/digital conversion			Σ Δ 16 bits			
Resolution			mV	15 + sign		
Filtering			1 <sup>st</sup> order digital filtering			
Read cycle time			ms	400 with temperature probes (1...4) 200 with thermocouples (1...4)		400 with temperature probes (1...8) 200 with thermocouples (1...8)
Permitted overload on the inputs			V	± 7.5 ---		
50/60 Hz rejection	Differential mode	Typical	dB	60		
	Common mode	Typical	dB	120		
Cold junction compensation	External compensation by Pt100 probe			<input type="checkbox"/> Using the dedicated Advantys Telefast ABE 7CPA412 sub-base including the probe <input type="checkbox"/> Using a 2-wire temperature probe wired on channel 0 and/or 4 <input type="checkbox"/> Using a 3-wire temperature probe wired on channel 3 and/or 7		
Recalibration				Internal		
Isolation	Between channels		V	750 ---		
	Between channels and bus		V	2,000 ---		
	Between channels and ground		V	750 ---		
Consumption	Typical		mA	See power consumption table page 6/8		

(1) %FS: Error as a % of full scale

(2) Including the conversion resistor error



#### Characteristics of BMX ART 0414/0814 analog input modules

##### Input ranges for BMX ART 0414/0814 modules

Voltage range			± 40 mV	± 80 mV	± 160 mV	± 320 mV	± 640 mV	± 1.28 V
Typical input impedance		MΩ	10					
Maximum conversion value			± 102.5%					
Maximum resolution		mV	40/2 <sup>14</sup>	80/2 <sup>14</sup>	160/2 <sup>14</sup>	320/2 <sup>14</sup>	640/2 <sup>14</sup>	1280/2 <sup>14</sup>
Measurement errors (1)	At 25°C	%FS	0.05					
	Maximum at 0...60°C	%FS	0.15					
Temperature drift		ppm/ <sup>o</sup> C	30					
Resistor range			400 Ω			4,000 Ω		
Type			2-, 3- or 4-wire					
Maximum conversion value			± 100%					
Maximum resolution		mV	400/2 <sup>14</sup>			4,000/2 <sup>14</sup>		
Measurement errors (1)	At 25°C	%FS	0.12					
	Maximum at 0...60°C	%FS	0.2					
Temperature drift		ppm/ <sup>o</sup> C	25					
Temperature probe ranges			Pt100	Pt1000	Cu10	Ni100	Ni1000	
Measurement range		°C	According to IEC: -200...+850 According to US/JIS: -100...+450		-100...+260	-60...+180		
Resolution		°C	0.1					
Detection type			Open circuit (detection on each channel)					
Measurement errors (1)	At 25°C (2)	°C	± 2.1		± 4	± 2.1	0.7	
	Maximum at 0...60°C	°C	± 2		± 4	± 3.0	1.3	
Max. wiring resistance	4-wire	Ω	50	500	50	500		
	2/3-wire	Ω	20	200	20	200		
Temperature drift			30 ppm/°C					
Thermocouple ranges			B	E	J	K	L	
Measurement range		°C	+130...+1820	-270...+1000	-200...+760	-270...+1370	-200...+900	
Resolution		°C	0.1					
Detection type			Open circuit (detection on each channel)					
Measurement errors (1)	At 25°C	°C	± 3.5	± 3.7	± 2.8	± 3.7	± 3.0	
	Maximum at 0...60°C	°C	± 5	± 5	± 4.5	± 5	± 4.5	
Temperature drift		ppm/ <sup>o</sup> C	25					
Thermocouple ranges (continued)			N	R	S	T	U	
Measurement range		°C	+270...+1300	-50...+1769	-50...+1769	-270...+400	-200...+600	
Resolution		°C	0.1					
Detection type			Open circuit (detection on each channel)					
Measurement errors (1)	At 25°C	°C	± 3.7	± 3.2	± 3.2	± 3.7	± 2.7	
	Maximum at 0...60°C	°C	± 5	± 4.5	± 4.5	± 5	± 4.5	
Temperature drift		ppm/ <sup>o</sup> C	25					

(1) %FS: Error as a % of full scale. ± 1 °C with Pt100 temperature probe range, - 100...+ 200 °C

(2) Excluding error caused by the wiring

2

2.2

#### Characteristics of the BMX AMO 0210 analog output module

Module			BMX AMO 0210		
Output type			Isolated high-level outputs		
Number of channels			2		
Ranges	Voltage		± 10 V		
	Current		0...20 mA and 4...20 mA		
Resolution			bits	15 + sign	
Conversion time			ms	≤ 1	
Output power supply			Internal power supply via rack		
Output ranges			Voltage	Current	
Adjustment range	Nominal	V	± 10 V	0...20 mA, 4...20 mA	
	Maximum	V	± 11.25 V	24 mA	
Load impedance			Ω	≥ 1,000	≤ 600
Detection type				Short-circuit	Open circuit
Measurement errors (1)	At 25°C	%FS	0.10		
	Maximum at 0...60°C	%FS	0.25		
Temperature drift			40 ppm/°C		
Recalibration			None, factory-calibrated		
Fallback mode (2)			Default or configurable		
Isolation	Between channels	V rms	1,400 V ---		
	Between channels and bus	V rms	2,000 V ---		
	Between channels and ground	V rms	2,000 V ---		
Consumption	Typical <td>mA</td> <td colspan="3">See power consumption table page 6/8</td>	mA	See power consumption table page 6/8		

#### Characteristics of BMX AMM 0600 mixed analog I/O module

Module		BMX AMM 0600										
Channel type		Non-isolated high-level inputs						Non-isolated high-level outputs				
Number of channels		4						2				
Ranges		± 10 V		0...5 V	0...10 V	1...5 V	0...20 mA	4...20 mA	± 10 V	0...20 mA	4...20 mA	
Maximum conversion value	Voltage	V ± 11.25					—		± 11.25		—	
	Current	mA —					0...30		—		0...24 mA	
Resolution		bits		14	12	13	12	12	12		11	
Filtering		1 <sup>st</sup> order digital filtering by firmware										
Precision of internal conversion resistor		250 Ω, 0.1% - 15 ppm/°C						—				
Read cycle time	Fast	ms		1 + 1 x no. of channels used (periodic reading of no. of declared channels)					—			
	Default	ms		5 for 4 channels					—			
Conversion time		ms		—					≤ 2			
Permitted overload on the input channels	Voltage	V		± 30			—		± 11.25		—	
	Current	mA		—			± 30		—		0...24	
Measurement errors (1)	At 25°C	%FS		0.25			0.35		0.25			
	Maximum at 0...60°C	%FS		0.35			0.50		0.60			
Temperature drift				30 ppm/°C			50 ppm/°C		100 ppm/°C			
Recalibration				Internal						None, factory-calibrated		
Fallback mode (2)				—						Default or configurable		
Isolation	Between group of input channels and group of output channels	V		1,400 ---								
	Between channels and bus	V		2,000 ---								
	Between channels and ground	V		2,000 ---								
Consumption	Typical	mA		See power consumption table page 6/8								

(1) %FS: Error as a % of full scale

(2) Default: Output at 0 (V or mA). Configurable: Hold last value or set at predefined value for each channel.

# Modicon M340

## automation platform

### Analog I/O modules



BMX AMI 0410



BMX ART 0414    BMX ART 0814



BMX FTB 2000



BMX FTW 301S



ABE 7CPA410



BMX FCA 150



BMX FCA 302

#### References

##### Analog input modules

Input type	Input signal range	Resolution	Connection	No. of channels	Reference	Weight kg
Isolated high-level inputs	$\pm 10$ V, 0...10 V, 0...5 V, 1...5 V, $\pm 5$ V 0...20 mA, 4...20 mA, $\pm 20$ mA	16 bits	Via cage clamp, screw clamp or spring-type removable terminal block	4 fast channels	BMX AMI 0410	—
Isolated low-level inputs	Temperature probe, thermocouple $\pm 40$ mV, $\pm 80$ mV, $\pm 160$ mV, $\pm 320$ mV, $\pm 640$ mV, $\pm 1.28$ V 0...400 $\Omega$ , 0...4000 $\Omega$	15 bits + sign	40-way connector	4 channels 8 channels	BMX ART 0414 BMX ART 0814 ▲	— —

##### Analog output module

Output type	Output signal range	Resolution	Connection	No. of channels	Reference	Weight kg
Isolated high-level outputs	$\pm 10$ V, 0...20 mA, 4...20 mA	16 bits	Via cage clamp, screw clamp or spring-type removable terminal block	2 channels	BMX AMO 0210	—

##### Mixed analog I/O module

Channel type	Signal range	Resolution	Connection	No. of channels	Reference	Weight kg
Mixed I/O, non-isolated	$\pm 10$ V, 0...10 V, 0...5 V, 1...5 V, 0...20 mA, 4...20 mA	14 bits or 12 bits depending on the range	Via cage clamp, screw clamp or cage spring-type removable terminal block	I: 4 channels Q: 2 channels	BMX AMM 0600 ▲	—

##### Connection accessories for analog modules (1)

Description	For use with modules	Type, composition	Length	Reference	Weight kg
20-way removable terminal blocks	BMX AMI 0410 BMX AMO 0210 BMX AMM 0600	Cage clamp	—	BMX FTB 2000	—
		Screw clamp	—	BMX FTB 2010	—
		Spring-type	—	BMX FTB 2020	—
Preformed cordsets	BMX AMI 0410 BMX AMO 0210 BMX AMM 0600	One 20-way removable terminal block	3 m	BMX FTW 301S	—
		One end with color-coded flying leads	5 m	BMX FTW 501S	—
		—	—	—	—
	BMX ART 0414 BMX ART 0814 (2)	One 20-way removable terminal block	3 m	BMX FCW 301S	—
		One end with color-coded flying leads	5 m	BMX FCW 501S	—
		—	—	—	—

##### Advantys Telefast ABE 7 pre-wired system

Advantys Telefast ABE 7 sub-bases	BMX AMI 0410	Distribution of isolated power supplies Delivers 4 protected isolated power supplies for 4...20 mA inputs Direct connection of 4 inputs	—	ABE 7CPA410	0.180
	BMX ART 0414 BMX ART 0814	Connection and provision of cold junction compensation for thermocouples Direct connection of 4 inputs	—	ABE 7CPA412	0.180
Preformed cordsets for ABE 7CPA410 sub-bases	BMX AMI 0410	One 20-way removable terminal block and one 25-way SUB-D connector for ABE 7CPA410 sub-base	1.5 m 3 m 5 m	BMX FCA150 BMX FCA300 BMX FCA500	— — —
		—	—	—	—
		—	—	—	—
	BMX ART 0414 BMX ART 0814	One 20-way removable terminal block and one 25-way SUB-D connector for ABE 7CPA410 sub-base	1.5 m 3 m 5 m	BMX FCA152 BMX FCA302 BMX FCA502	— — —
		—	—	—	—
		—	—	—	—

(1) The shielding on the cordsets carrying the analog signals must always be connected to the BMX XSP000 shielding connection kit mounted under the rack holding the analog modules (see page 1/15).


(2) The BMX ART 0814 8-channel module requires two ABE 7CPA412 sub-bases and two BMX FCA002 cordsets.

▲ Available 4<sup>th</sup> quarter 2007

# Modicon M340

## Automation platform

### Programmable process control

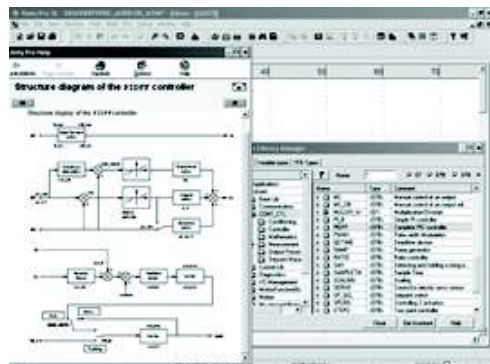

CONT\_CTL, programmable process control integrated in Unity Pro

#### Process control in machines

Unity Pro contains CONT\_CTL, a library of 36 function blocks used to create control loops for machine control.

All requirements for closed loop control functions in machines are adequately met by Modicon M340 thanks to the wealth of functions in the library and the flexibility with which function blocks can be linked together through programming. This solution therefore eliminates the need for external controllers, and simplifies the overall control architecture of the machine, as well as its design, roll-out and operation.

The function blocks, EF or EFB, can be used in all Unity Pro languages i.e. LD, ST, IL and FBD. FBD is particularly suitable for accessing control processing operations in Unity Pro through its assistant for entering and viewing parameters and function block variables.

#### CONT\_CTL library functions

The library consists of five function families:

- Input data conditioning
- Controllers
- Math functions
- Measurement processing
- Output value processing

#### Input data conditioning


DTIME	Pure delay
INTEGRATOR	Integrator with limiting
LAG_FILTER	First order time lag device
LDLG	PD device with smoothing
LEAD	Differentiator with smoothing
MFLOW	Mass flow calculation based on the measurement of differential pressure or flow speed with pressure and temperature compensation
QDTIME	Deadtime device
SCALING	Scaling
TOTALIZER	Integrator (typically of flow) until a limit (typically a volume) is reached, with automatic reset
VEL_LIM	Velocity limiter, with manipulated variable limiting

#### Controllers


PI_B	Simple PI controller: PI algorithm with a mixed structure (series/parallel)
PIDFF	Complete PID controller: PID algorithm with a parallel or mixed structure (series/parallel)
AUTOTUNE	Automatic tuner setting for the PIDFF (complete PID) controller or the PI_B (simple PI) controller <ul style="list-style-type: none"> <li>□ Identification using Ziegler Nichols type method</li> <li>□ Modeling based on 1<sup>st</sup> order process</li> <li>□ Building of control parameters with criterion for prioritizing either the reaction time to disturbance (dynamic) or the stability of the process</li> </ul>
IMC	Model corrector. The model is a first order model with delay. This corrector is useful: <ul style="list-style-type: none"> <li>□ When there are serious delays compared with the main time constant of the process; this scenario cannot be satisfactorily resolved by standard PID process control</li> <li>□ For regulating a non-linear process</li> </ul> IMC can handle any stable and aperiodic process of any order.
SAMPLETM	Control of controller startup and sampling
STEP2	Two-point controller
STEP3	Three-point controller for temperature regulation

#### Math functions

COMP_DB	Comparison of two values, with dead zone and hysteresis
K_SQRT	Square root, with weighting and threshold, useful for linearization of flow measurements
MULDIV_W	Weighted multiplication/division of 3 numerical values
SUM_W	Weighted summation of 3 numerical values

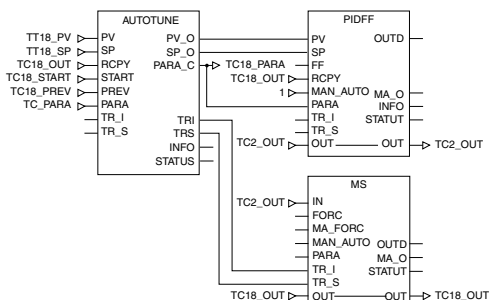

Example: PID controller with MS manual control

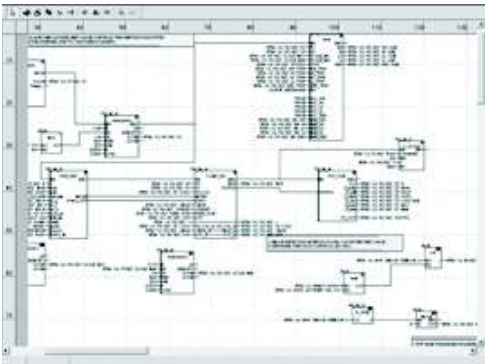

Programming in Unity Pro in offline mode

Measurement processing	
AVGMV	Moving average with fixed number of samples (50 max.)
AVGMV_K	Moving average with constant correction factor, 10,000 samples max.
DEAD_ZONE	Dead zone
LOOKUP_TABLE1	Linearization of characteristic curves using first-order interpolation
SAH	Detection of a rising edge
HYST_XXX	Detection of high threshold with hysteresis (1)
INDLIM_XXX	Detection of high and low thresholds with hysteresis (1)
Output value processing	
MS	Manual control of an output
MS_DB	Manual control of an output with dead zone
PWM1	Control via pulse width modulation
SERVO	Control for servo motors
SPLRG	Control of two <i>Split Range</i> actuators
Setpoint management	
RAMP	Ramp generator, with separate ascending and descending ramps
RATIO	Ratio controller
SP_SEL	Selection of setpoint value: local (operator) or <i>remote</i> (processing)

Setting up process control function blocks

Based on the sequencing of function blocks, the FBD language integrated into Unity Pro is a programming language particularly suitable for building control loops. Designers can use FBD to easily associate blocks from the CONT\_CTL library with their own DFB blocks written in Unity Pro's ST, IL or LD language, or in C language.

Debugging, operation

All Unity Pro's standard debugging services (see page 4/21) are available. In particular, the Modicon M340 processor simulator can be used to check correct execution of processing offline.


Compatibility

The CONT\_CTL control function block library is available in all versions of Unity Pro. It is compatible with all processors in the Modicon M340, Premium, Quantum, and Atrium ranges.

Resources

The technical documentation provides many examples of how to set up programmable process control function blocks in FBD, LD, IL and ST languages.

The techniques for adjusting process control loops are described in the document "Process control, Unity V3.0" available on the [www.telemecanique.com](http://www.telemecanique.com) website.

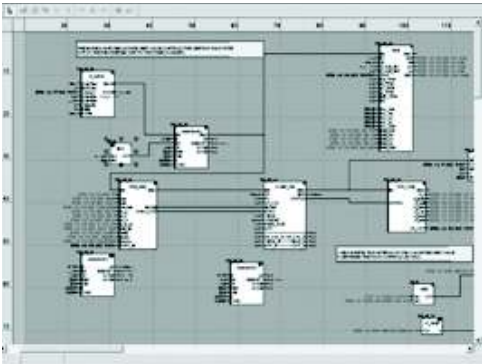

Programming in online mode

(1) XXX depending on the type of variable: DINT, INT, UINT, UDINT, REAL

# Modicon M340

## automation platform

Distributed I/O system

2

.3

### Splitter box and module type

Monobloc I/O splitter boxes

Advantys FTB



### Type of communication with Modicon M340 platform

CANopen

### Max. number per connexion points

1 monobloc splitter

### Discrete inputs/outputs

Number of channels

Splitter of 16 I, 8 I + 8 O, 12 I + 4 O, 16 I/O or 8 I + 8 I/O

Input voltage

--- 24 V

Output voltage

--- 24 V

### Analogue inputs/outputs

—

### Counting

—

### Type of input/output connectors

M12 connectors

### Housing type

Plastic and metal

### Module type

FTB 1

### Pages

Consult our catalogue "IP 67 splitter boxes"

## Monobloc IP 20 distributed I/O

Modicon Momentum



## Optimum IP 20 distributed I/O

Advantys OTB



## Modular IP 20 distributed I/O

Advantys STB



## Ethernet TCP/IP

1 base with 1 communicator

Base of 16 I, 32 I, 8 O, 16 O, 32 O, 10 I/8 O, 16 I/8 O, 16 I/12 O et 16 I/16 O

--- 24 V, ~ 120 V et ~ 230 V

--- 24 V, ~ 120 V and ~ 230 V and relay

Bases 8 I, 16 I or 4 O voltage/current  
Base 4 I thermocouple or RTD

Base 2 channels 10 kHz/200 kHz

Base 6 I/3 O ~ 120 V with 1 Modbus port

Screw or spring terminal blocks

Plastic

## Ethernet TCP/IP CANopen Modbus (RS 485)

1 interface module

12 I/8 O

--- 24 V

--- 24 V and relay

—

Integrated in interface module:  
- 2 channels 5 kHz/20 kHz  
- 2 PWM function channels

—

Removable screw terminal blocks

## Ethernet TCP/IP CANopen

1 "NIM" interface module + 32 I/O modules

Module of 2 I, 4 I, 6 I, 16 I, 2 O, 4 O, 6 O or 16 O

--- 24 V, ~ 115 V and ~ 230 V

--- 24 V, ~ 115/230 V and relay

Modules 2 I and 2 O voltage/current  
Module 2 I thermocouple or RTD

Module 1 channel 40 kHz

Parallel interface module for TeSys Quickfit and TeSys U motor-starters

Screw or spring connectors

170 AD●

Consult our catalogue  
"Modicon Momentum automation platform"

OTB 1●O DM9LP

Consult our catalogue  
"Advantys OTB distributed I/O"

STB D●●/A●●

Consult our catalogue  
"Advantys STB distributed I/O"



# Modicon M340

## automation platform

### BMX EHC 0200/0800 counter modules

2

#### Presentation

**BMX EHC 0200** and **BMX EHC 0800** counter modules for the Modicon M340 automation platform are used to count the pulses generated by a sensor or to process the signals from an incremental encoder.

The two modules differ in the number of counter channels, maximum input frequencies, functions and auxiliary input and output interfaces:

Counter module	No. of channels	Maximum frequency	Applications	No. of physical inputs	No. of physical outputs
<b>BMX EHC 0200</b>	2	60 kHz	Upcounting Downcounting Measurement Frequency meter Frequency generator Axis following	6 per channel	2 per channel
<b>BMX EHC 0800</b>	8	10 kHz	Upcounting Downcounting Measurement Interfacing	2 per channel	—

The sensors used on each channel can be:

- 2-wire 24 V proximity sensors
- 3-wire 24 V proximity sensors
- 10/30 V output signal incremental encoders with push-pull outputs

**BMX EHC 0200/0800** counter modules can be used to meet the demands of applications such as:

- Alarm generation on empty unwinder status using the ratio
- Sorting small parts using the period meter
- Single electronic cam using the dynamic setting thresholds
- Speed control using the period meter

These standard format modules can be installed in any available slot of a Modicon M340 PLC; they can be removed while powered up. In a Modicon M340 PLC configuration, the number of **BMX EHC 0200/0800** counter modules should be added to the number of application-specific modules (communication).

The function parameters are set by configuring the Unity Pro software.

#### Description

**BMX EHC 0200 / 0800** counter modules are standard format. They occupy a single slot in **BMX XBP ●●00** racks.

They come in a plastic case, which ensures IP 20 protection of the electronics, and locks into position with a screw.

#### BMX EHC 0200 module, 2 channels, 60 kHz

The **BMX EHC 0200** counter module has the following on the front panel:

- 1 Module and channel status LED array
- 2 16-way connector for wiring the sensors of counter 0
- 3 16-way connector for wiring the sensors of counter 1
- 4 10-way connector for wiring:
  - the auxiliary outputs
  - the sensor and actuator power supplies

#### To be ordered separately:

- A **BMX XTS HSC 20** kit containing two 16-pin connectors and one 10-pin connector
- A **BMX XSP ●●00** electromagnetic compatibility kit, see page 1/15.


#### BMX EHC 0800 module, 8 channels, 10 kHz

The **BMX EHC 0800** counter module has the following on the front panel:


- 1 Module and channel status LED array
- 2 **BMX FTB 20●0** 20-way connector compatible with discrete I/O

#### To be ordered separately:

- A **BMX XSP ●●00** electromagnetic compatibility kit, see page 1/15 .



BMX EHC 0200




BMX EHC 0800




Operation

Block diagram of a BMX EHC 0200 module counter channel

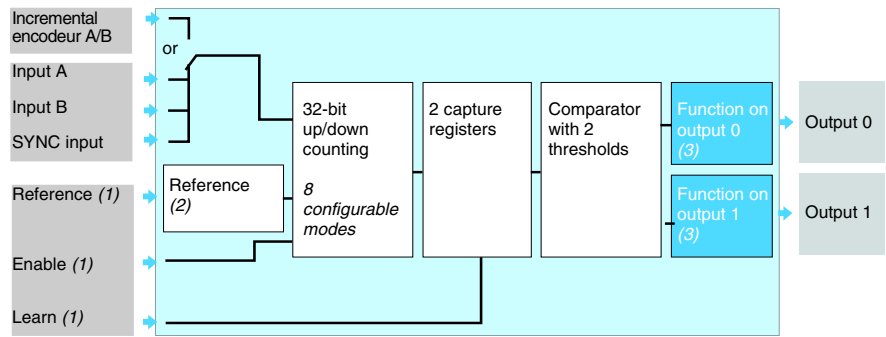


Block diagram of a BMX EHC 0800 module counter channel

Used in 16-bit (8 channels)

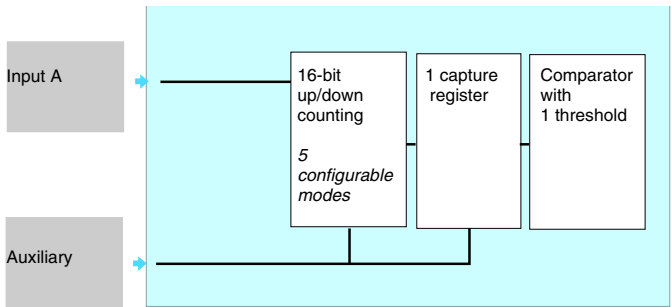

Used in 32-bit (4 channels)

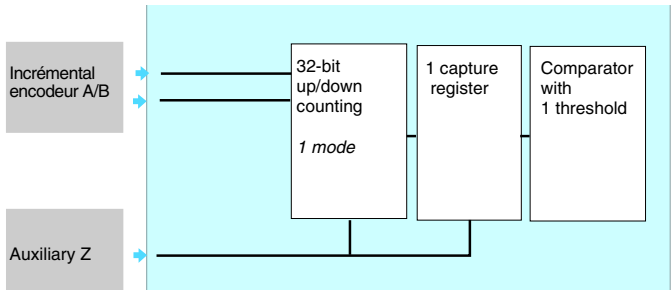

(1) Optional inputs.  
(2) Reference: 5 operating modes for SYNC "IN\_SYNC" and Reference "IN\_REF" inputs.  
(3) Functions of inputs: 15 possible types of behavior.

# Modicon M340

## automation platform

### BMX EHC 0200/0800 counter modules

2

2.4

#### Functional characteristics of the BMX EHC 0200 module

8 configurable modes	Frequency meter	<p>This mode measures a frequency, speed, data rate or an event stream. As standard, this mode measures the frequency received on the IN_A input. This frequency is always expressed in Hz (number of pulses per second), with a precision of 1 Hz.</p> <p>The maximum frequency on the IN_A input is 60 kHz. The maximum cyclic ratio at 60 kHz is 60%.</p>
	Count events	<p>This mode is used to determine the number of events received intermittently. In this mode, the counter calculates the number of pulses applied to the IN_A input, at time intervals defined by the user.</p> <p>The module counts the pulses applied to the IN_A input each time the pulse for this input lasts longer than 5 <math>\mu</math>s (without anti-bounce filter).</p>
	Measure time periods	<p>This mode is used to:</p> <ul style="list-style-type: none"> <li>■ Determine how long an event lasts for</li> <li>■ Determine the time that separates 2 events</li> <li>■ Time and measure the execution time of a process</li> </ul> <p>Measures the elapsed time during an event or between two events (IN_A input) according to a selectable time base of 1 <math>\mu</math>s, 100 <math>\mu</math>s or 1 ms. The IN_SYNC input can be used to enable or stop a measurement.</p> <p>The module can carry out a maximum of 1 measurement every 5 ms. The smallest measurable pulse is 100 <math>\mu</math>s, even if the unit defined by the user is 10 <math>\mu</math>s. The maximum measurable duration is 4,294,967,295 units (unit to be defined).</p>
	Ratio count	<p>The ratio count mode only uses the IN_A and IN_B inputs. This count mode consists of 2 modes:</p> <ul style="list-style-type: none"> <li>■ Ratio 1: used to divide 2 frequencies and useful in applications such as flowmeters and mixers, for example.</li> <li>■ Ratio 2: used to subtract 2 frequencies and useful in the same applications but requiring more precise regulation (more similar frequencies).</li> </ul> <p>Ratio 1 mode presents the results in thousandths in order to have better accuracy (a display of 2000 corresponds to a value of 2) and ratio 2 mode presents the results in Hz.</p> <p>The maximum frequency that the module can measure on the IN_A and IN_B inputs is 60 kHz.</p>
	Downcounting	<p>This mode is used to list a group of operations. In this mode, activation of the synchronization function starts the counter which, starting with a preset value, decreases on each pulse applied to the IN_A input, until it reaches the value 0. This downcounting is made possible when the enable function has been activated. The counting register is thus updated at intervals of 1 ms. One basic use of this mode is to signal, using an output, the end of a group of operations (when the counter reaches 0).</p> <p>The smallest pulse applied to the IN_SYNC input is 100 <math>\mu</math>s. The frequency applied to the IN_SYNC input is at maximum 1 pulse every 5 ms. The maximum value of the preset value is 4,294,967,295. The maximum count value is 4,294,967,295 units.</p>
	Loop (modulo) counting	<p>This mode is used in packaging and labeling applications where actions are repeated on series of moving objects.</p> <ul style="list-style-type: none"> <li>■ In the counting direction, the counter increases until it reaches the preset "modulo - 1" value. On the next pulse, the counter is reset to 0 and counting restarts.</li> <li>■ In the downcounting direction, the counter decreases until it reaches the value 0. On the next pulse, the counter is reset to the preset "modulo - 1" value. Downcounting can then restart.</li> </ul> <p>The maximum frequency applied to the IN_A and IN_B inputs is 60 kHz. The frequency of the modulo event is at maximum 1 every 5 ms. The maximum modulo value is 4,294,967,296 (possible with modulo adjust value is 0) .</p>
	32-bit counter counting	<p>This mode is used mainly in axis following.</p> <p>The maximum frequency applied simultaneously to the IN_A and IN_B inputs is 60 kHz. The frequency of the referencing event is at maximum 1 every 5 ms. The counter value is between - 2,147,483,648 and + 2,147,483,647.</p>
	Width modulation	<p>In this operating mode, the module uses an internal clock generator to supply a periodic signal on the module output Q0. Only the Q0 output is affected by this mode, the Q1 output being independent of this mode.</p> <p>The maximum output frequency value is 4 kHz. As the Q0 output is source type, a load resistor is needed for the Q0 output signal to change to 0 at the correct frequency. The cyclic ratio adjustment range varies according to the frequency of the Q0 output.</p>

# Modicon M340

## automation platform

### BMX EHC 0200/0800 counter modules

#### Functional characteristics of the BMX EHC 0800 module

5 configurable modes in 16-bit	Frequency meter	<p>This mode measures a frequency, speed, rate or data stream control. As standard, this mode measures the frequency received on the IN_A input. This frequency is always expressed in Hz (number of pulses per second), with a precision of 1 Hz.</p> <p>The maximum frequency on the IN_A input is 10 kHz.</p> <p>The maximum cyclic ratio at 10 kHz is 60%.</p>
	Count events	<p>This mode is used to determine the number of events received intermittently. In this mode, the counter calculates the number of pulses applied to the IN_A input, at time intervals defined by the user.</p> <p>As an option, it is possible to use the IN_AUX input during a period of time, provided that the enable bit has indeed been configured.</p> <p>The module counts the pulses applied to the IN_A input each time the pulse for this input lasts longer than 50 µs (without anti-bounce filter).</p> <p>Pulses with less than 100 ms synchronization are lost.</p>
	Downcounting	<p>This mode is used to list a group of operations. In this mode, when counting is enabled (software validation via the valid_sync command), a rising or falling edge on the IN_AUX input causes a value, defined by the user, to be loaded in the counter. The latter decreases on each pulse applied to the IN_A input, until it reaches the value 0. Downcounting is made possible when the force_enable command is high (software positioning).</p> <p>The smallest pulse applied to the IN_AUX input varies according to the selected filter level.</p> <p>The frequency applied to the IN_AUX input is at maximum 1 pulse every 25 ms.</p>
	Loop (modulo) counting	<p>This mode is used in packaging and labeling applications where actions are repeated on series of moving objects.</p> <p>The counter increases on each pulse applied to the IN_A input, until it reaches the preset "modul - 1" value. On the next pulse in the upcounting direction, the counter is reset to 0 and upcounting restarts.</p> <p>The maximum frequency applied to the IN_A input is 10 kHz.</p> <p>The smallest pulse applied to the IN_AUX input varies according to the selected filter level.</p> <p>The frequency applied to the IN_AUX input is at maximum 1 pulse every 25 ms.</p> <p>The frequency of the modulo event is at maximum 1 every 25 ms.</p> <p>The maximum modulo value is 65,536 units.</p>
	Up/down counter	<p>This mode is used for an accumulation, upcounting or downcounting operation on a single input. Each pulse applied to the IN_A input produces:</p> <ul style="list-style-type: none"> <li>■ Upcounting of pulses if the IN_AUX input is high</li> <li>■ Downcounting of pulses if the IN_AUX input is low</li> </ul> <p>The counter values vary between the limits - 65,536 and + 65,535.</p> <p>The maximum frequency applied to the IN_A input is 10 kHz.</p> <p>Pulses applied to the IN_A input, after a change of direction, are only upcounted or downcounted after a period corresponding to the delay for taking account of the state of the IN_AUX input due to the programmable filter level on this input.</p>
One mode in 32-bit	32-bit counter counting	<p>32-bit counter counting mode is available for channels 0, 2, 4, and 6 (channels 1, 3, 5 and 7 are now inactive). It behaves in the same way as the up/down counting mode using up to 3 physical inputs. It enables simultaneous upcounting and downcounting.</p> <p>The counter values vary between the limits -2,147,483,648 and +2,147,483,647 (31 bits + sign).</p> <p>The maximum frequency applied to the IN_A and IN_B inputs is 10 kHz.</p> <p>The smallest pulse applied to the IN_AUX input is defined according to the filtering applied to this input.</p> <p>The frequency of loading the preset value is at maximum 1 every 25 ms.</p>

2

2.4

# Modicon M340

## automation platform

### BMX EHC 0200/0800 counter modules

2

2.4

#### General characteristics

Type of module		BMX EHC 0200 32-bit	BMX EHC 0800 16-bit	32-bit
Modularity		2 channels	8 channels	4 channels
Number of inputs		6 per channel	2 per channel	3 per channel
Number outputs		2 per channel	—	—
Applications		Upcounting, downcounting, measurement, frequency meter, frequency generator, axis following	Upcounting, downcounting, measurement, interfacing	—
Configurable modes		8 modes	5 modes	1 mode (Dual phase)
Frequency on counter inputs	<b>kHz</b>	Max. 60	Max. 10	—
Module cycle time	<b>ms</b>	1	5	—
Encoder		10...30 V incremental encoder model with push-pull outputs	—	10...30 V incremental encoder model with push-pull outputs
Distribution of power to the sensors		Yes. Short-circuit and overload protection, 300 mA typical	—	—
Hot swapping		Yes, in certain conditions: the module can be removed and reinserted in its slot while the rack is powered up, but the counter may need to be re-enabled when it is reinserted in its base.		
Insulation voltage from the ground to the bus	<b>V rms</b>	1500 for 1 min	—	—
Consumption	Typical	<b>mA</b>	See power consumption table page 6/8	

#### Input characteristics

Module type		BMX EHC 0200	BMX EHC 0800 16-bit	32-bit
Input type	High-speed inputs per channel	IN_A, IN_B and IN_SYNC	IN_A and IN_AUX	IN_A, IN_B and IN_AUX
	Auxiliary inputs per channel	IN_EN, IN_REF and IN_CAP	—	—
Number of inputs per channel		6	2	3
Inputs	Voltage	<b>V</b>	24 ---	—
	IEC 61131-2 conformity		Type 3	—
	At state 1	Voltage	<b>V</b>	11...30 ---
		Current	<b>mA</b>	5 up to 30 V ---
	At state 0	Voltage	<b>V</b>	< 5 ---
		Current	<b>mA</b>	< 1.5
	Current	At 11 V ---	<b>mA</b>	> 2

#### Characteristics of outputs

Output type		BMX EHC 0200	BMX EHC 0800
Outputs	Nb per channel	2	—
Voltages	Nominal	<b>V</b>	24 ---
	Limits	<b>V</b>	19.2...30 ---
Maximum load current	Each point	<b>A</b>	0.5
	Per module	<b>A</b>	1
Leakage current	At state 0	<b>mA</b>	≤ 0.1
Voltage drop	At state 1	<b>V</b>	≤ 3
Short-circuit output current	Each point	<b>A</b>	< 1.5
Short-circuit and overload		Protection for each channel	—
Output logic	Default	Positive (source) on both channels	—
	User configuration	Negative (sink) on one or two channel(s)	—
Inductive load		L = 0.5/I <sup>2</sup> × F where: - L: load inductance in Henrys - I: load current in A - F: switching frequency in Hz	—

# Modicon M340

## automation platform

### BMX EHC 0200/0800 counter modules



BMX EHC 0200



BMX EHC 0800



BMX FTB 2000

#### References

##### Counter modules

Description	No. of channels	Characteristics	Reference (1)	Weight kg
<b>Counter modules</b> for 2 and 3-wire 24 V $\square$ sensors and <b>10/30 V <math>\square</math></b> incremental encoders with push-pull outputs	2	Counting at 60 kHz	<b>BMX EHC 0200</b>	0.112
	8	Counting at 10 kHz	<b>BMX EHC 0800</b>	0.113


##### Connection accessories (1)

Description	Composition Use	Unit reference	Weight kg
<b>Connector kit</b> For BMX EHC 0200 module	Two 16-pin connectors and one 10-pin connectors	<b>BMX XTS HSC 20</b>	0.021
<b>20-way removable terminals blocks</b> For BMX EHC 0800 module	Cage clamp	<b>BMX FTB 2000</b>	0.093
	Screw clamp	<b>BMX FTB 2010</b>	0.075
	Spring-type	<b>BMX FTB 2020</b>	0.060
<b>Electromagnetic compatibility kits</b> For BMX EHC 0200/0800 modules	Comprising: a metal bar, two sub-bases and one set of spring clamping rings	See page 1/15	–

(1) The shielding on the cordsets carrying the analog signals must always be connected to the **BMX XSP0000** shielding connection kit mounted under the rack holding the analog modules (see page 1/15).


#### Connections for BMX EHC 0200 module

##### 16-pin connector pinout



Pin number	Symbol	Description
1, 2, 7, 8	24V_SEN	+ 24 V $\equiv$ sensors
5, 6, 13, 14	GND_SEN	0 V $\equiv$ sensors
15, 16	FE	Functional earth
3	IN_A	Input A
4	IN_SYNC	Synchronization input
9	IN_B	Input B
10	IN_EN	Enable input
11	IN_REF	Referencing input
12	IN_CAP	Capture input


##### 10-pin connector pinout




Pin number	Symbol	Description
1	24V_IN	+ 24 V $\equiv$ input power supply
2	GND_IN	0 $\equiv$ input power supply
5	Q0-1	Q1 output of counter channel 0
6	Q0-0	Q0 output of counter channel 0
7	Q1-1	Q1 output of counter channel 1
8	Q1-0	Q0 output of counter channel 1
9	24V_OUT	+ 24 V $\equiv$ output power supply
10	GND_OUT	0 V $\equiv$ output power supply

#### Examples of connection to the BMX EHC 0200 module


##### 2-/3-way sensor

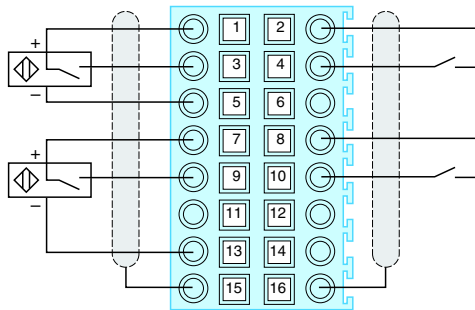

##### Incremental encoder

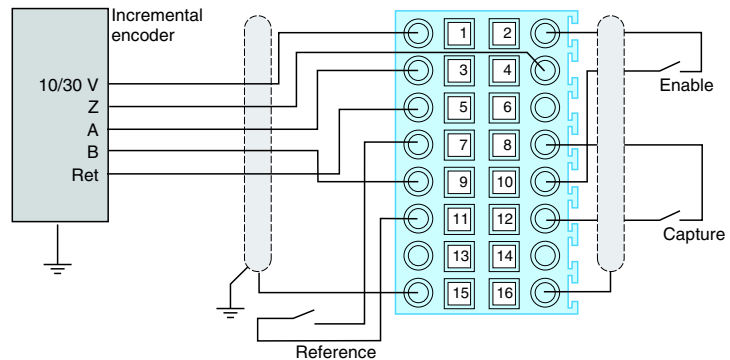


#### Power supplies and actuators

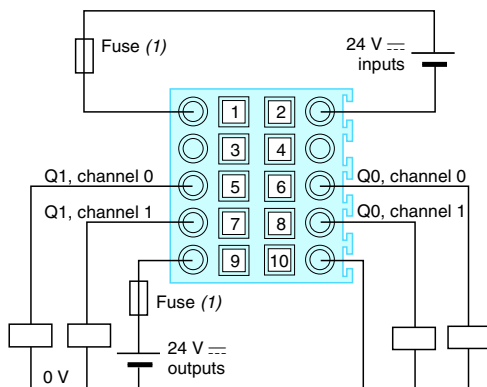

(1) A fast-blow fuse should be used to protect the module electronics in the event of reversed polarity of the power supplies on the inputs and outputs.

#### Connections for BMX EHC 0800 module

Connector pinout for the BMX FTX 20•0, 20-way terminal block




Pin number	Description
1	IN_AUX input of channel 0
2	IN_A input of channel 0
3	IN_AUX input of channel 1
4	IN_A input of channel 1 or IN_B input of channel 0
5	IN_AUX input of channel 2
6	IN_A input of channel 2
7	IN_AUX input of channel 3
8	IN_A input of channel 3 or IN_B input of channel 2
9	IN_AUX input of channel 4
10	IN_A input of channel 4
11	IN_AUX input of channel 5
12	IN_A input of channel 5 or IN_B input of channel 4
13	IN_AUX input of channel 6
14	IN_A input of channel 6
15	IN_AUX input of channel 7
16	IN_A input of channel 7 or IN_B input of channel 0
17	0 V --- sensors
18	+ 24 V --- sensors
19	Functional earth, for shielding connection
20	Functional earth, for shielding connection

2


2.4

#### Examples of connection to the BMX EHC 0800 module


Connection of sensors (1) (2) (3)

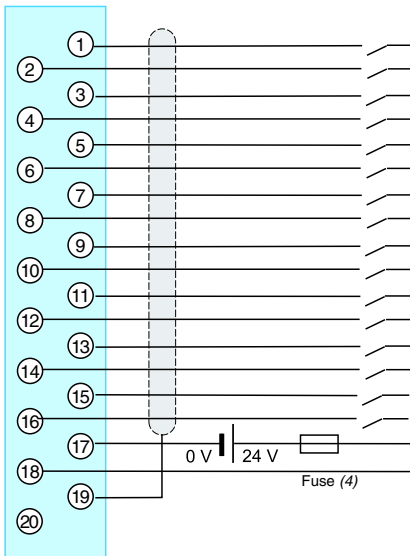

Connection of an incremental encoder (1) (2) (3)

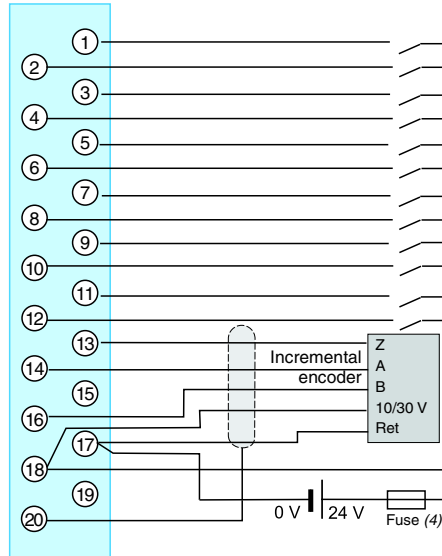

- (1) It is advisable to adapt the programmable filtering to the frequency applied to the inputs since using programmable filtering avoids the need to use a shielded cable.
- (2) In the case of an encoder or a high-speed sensor without programmable filtering, it is advisable to use a shielded cable connected to pins 15 and 16 of the connector.
- (3) In the case of a very disturbed environment without programmable filtering, it is advisable to use the **BMX XSP 010** electromagnetic protection kit to connect the shielding. In this case it is also advisable to use a 24 V --- power supply dedicated to the inputs as well as a shielded cable for connecting the power supply to the module.
- (4) A fast-blow fuse should be used to protect the module electronics in the event of reversed polarity of the power supplies.

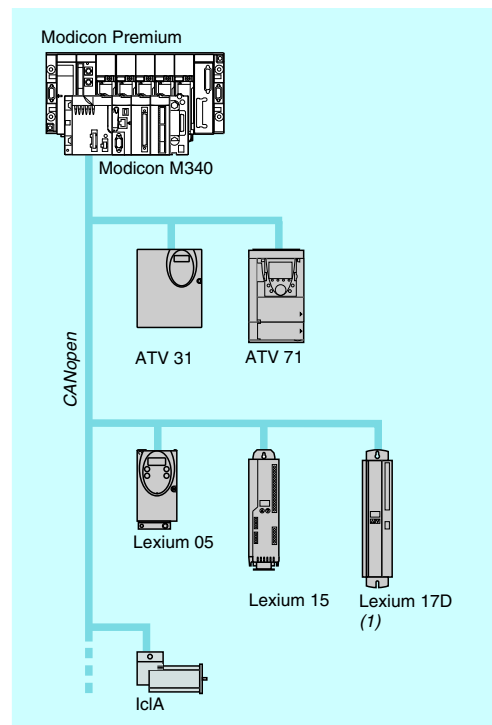

MFB: Motion control distributed over CANopen



### Presentation

MFB (Motion Function Blocks) is a library of function blocks integrated in Unity Pro used to set up motion control in the architectures of drives and servo drives on machine buses and CANopen installations:

- Altivar 31: For asynchronous motors from 0.18 to 15 kW
- Altivar 71: For asynchronous motors from 0.37 to 500 kW
- Lexium 05: For servo motors from 0.4 to 6 kW
- Lexium 15LP/MP/HP: For BSH and BDH servo motors from 0.9 to 42.5 kW
- Lexium 17D: For BPH, BPL and SER servo motors from 1.5 to 70 A rms (1)
- IclA IFA/IFE/IFS: For integrated motor drives from 0.05 to 0.25 kW

In compliance with PLCopen specifications, the MFB library allows both easy and flexible motion programming with Unity Pro, as well as axis diagnosis. In maintenance operations, drives can be replaced quickly and safely thanks to drive parameter download blocks.

Setting up drives on the CANopen network is facilitated through Motion Tree Manager organization in the Unity Pro browser, making it easy for users to access the application drives.

### Applications

The features of the Motion Function Blocks library are particularly suitable for machines with independent axes. In the case of these modular/special machines, MFB function blocks are the perfect solution for controlling single axes. The following are typical applications for this type of architecture:

- Automatic storage/removal
- Handling
- Palletizers/depalletizers
- Conveyors
- Packaging, simple label application
- Grouping/ungrouping
- Adjustment axes in flexible machines, etc.

### Functions

The table below lists the function blocks of the MFB library and the drives compatible with them. The prefix indicates the block family:

- MC: Function block defined by the Motion Function Blocks PLCopen standard
- TE: Function block specific to Telemecanique products
- Lxm: Function block specific to Lexium servo drives


Type	Function	Function block	Altivar ATV 31	ATV 71	Lexium 05	15/17D (1)	IclA IFA/IFE/IFS
Management and motion	Read an internal parameter	MC_ReadParameter					
	Write an internal parameter	MC_WriteParameter					
	Read the current position	MC_ReadActualPosition					
	Read the instantaneous speed	MC_ReadActualVelocity					
	Acknowledge error messages	MC_Reset					
	Stop all active movement	MC_Stop					
	Axis coming to standstill	MC_Power					
	Movement to absolute position	MC_MoveAbsolute					
	Relative movement	MC_MoveRelative					
	Additional movement	MC_MoveAdditive					
	Homing	MC_Home					
	Movement at given speed	MC_MoveVelocity					
	Read diagnostic data	MC_ReadAxisError					
	Read servo drive status	MC_ReadStatus					
	Read all parameters and store in PLC memory	TE_UploadDriveParam					
	Write all parameters from the PLC memory	TE_DownloadDriveParam					
Advanced Lexium functions	Set the reduction ratio	Lxm_GearPos				(2)	
	Read a motion task	Lxm_UploadMTask					
	Write a motion task	Lxm_DownloadMTask					
	Start a motion task	Lxm_StartMTask					
System	Communication with the servo drive	TE_CAN_Handler					

Compatible

(1) Lexium 17D supported by MFB with Modicon Premium platform only  
(2) Function not supported by Lexium 15 LP servodrives



# Modicon M340 automation platform MFB motion control

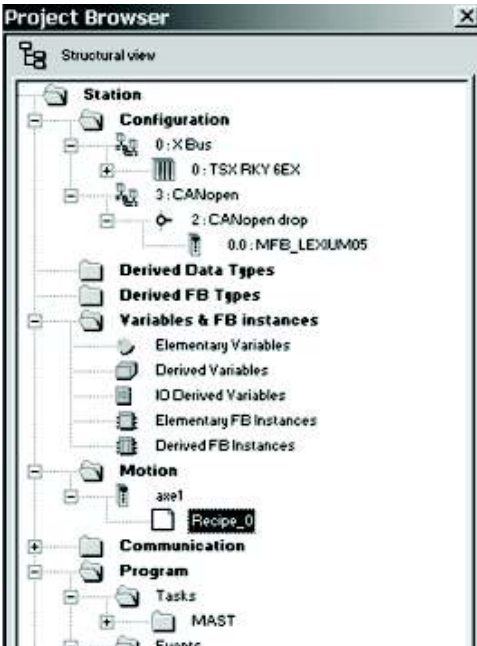

Motion Tree Manager integrated in the Unity Pro browser

## Motion Tree Manager

Motion Tree Manager is associated with Unity Pro's MFB library, and integrated in its browser. It provides specific assistance for:

- Axis object management
- Axis variable definition
- Drive parameter management

Motion Tree Manager automatically creates links between the CANopen bus configuration and the MFB function block data using a limited amount of configuration data.

## General axis parameters

In this tab, the designer is prompted to define:

- The name of the axis that will identify it in the browser for the entire application
- The address of the drive on the CANopen bus


## Axis parameters

The dropdown lists in this tab are used to determine the exact type of drive: family, version.

## Variable names

This last tab is used to identify data structures:

- **Axis\_Reference**, used by all the instances of function blocks for the axis in question
- **CAN\_Handler**, used to manage communication with the drive via the CANopen network

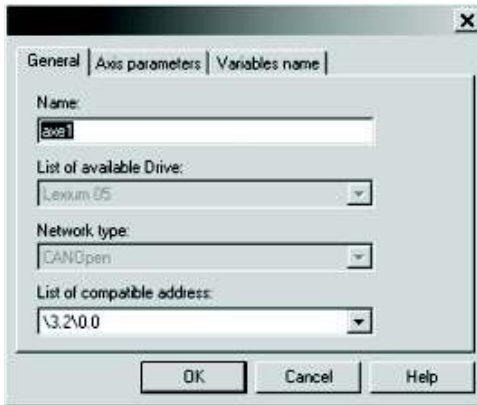

General parameters: Axis name and address

## Recipe definition

The "recipes" attached to the axis are the data structures containing all the adjustment parameters of a given drive. This data is used when:

- Changing the drive with restoration of the context during "Faulty Device Replacement" maintenance
- Changing the manufacturing program of the machine, and calling up an appropriate set of parameters, such as servo control gains, limitations etc. adapted to the weight and size of the moving parts.

## Programming, diagnostics and maintenance

Communication between the PLC and drive is automatically set up by the system as soon as a TE\_CAN\_Handler instance is declared in the Unity Pro task with which the axis is associated.

Movements are then programmed by sequencing function blocks from the library in the Unity Pro editor as selected by the user (LD, ST, FBD).

The two function blocks, MC\_ReadStatus, and in some cases MC\_ReadAxisError, are useful for determining the overall status of the axis, and the code of active warnings or errors.

The function blocks TE\_UploadDriveParam and TE\_DownloadDriveParam allow the application to save all the parameters of a drive (recipe) and to then quickly reload them into another drive if the first one fails.



MFB: Programming a movement in absolute mode



---

*Communication selection guide ..... page 3/2*

### **3.1 - Ethernet TCP/IP networks - Transparent Ready**

- Embedded Web services. .... page 3/4
- Ethernet TCP/IP communication services. .... page 3/8
- Performance ..... page 3/16
- Ethernet integrated port / module selection ..... page 3/21
- Ethernet processor/module product data sheet. .... page 3/22
- ConneXium cabling system ..... page 3/24

### **3.2 - CANopen machines and installations bus**

- Presentation ..... page 3/36
- Description ..... page 3/38
- Characteristics ..... page 3/38
- References ..... page 3/39
- Cabling system ..... page 3/40

### **3.3 - Serial lines**


- Modbus and character mode serial link ..... page 3/42
- Cabling system ..... page 3/44

# Modicon M340

## automation platform

Communication, integrated ports and modules

3

Applications		Processors with integrated Ethernet TCP/IP port		Ethernet TCP/IP module	
					
Type		Ethernet TCP/IP			
Structure	Physical interface	10BASE-T/100BASE-TX			
	Connector type	RJ45			
	Access method	CSMA-CD			
	Data rate	10/100 Mbit/s			
Medium		Double twisted pair copper cable, category CAT 5E Optical fiber via ConneXium wiring system			
Configuration	Maximum number of devices	—			
	Maximum length	100 m (copper cable), 4,000 m (multi-mode optical fiber), 32,500 m (single-mode optical fiber)			
	Number of links of the same type per station	1 (integrated port)		1 (Ethernet module) with BMX P34 1000/2010 processor 2 (integrated port et Ethernet module) with BMX P34 2020/2030 processor	
	Other integrated port	Serial link		CANopen bus	
Standard services		Modbus TCP/IP messaging			
Conformity class		Transparent Ready class B10		Transparent Ready class B30	Transparent Ready class C30
Embedded Web server services	Standard services	"Rack viewer" PLC diagnostics "Data editor" access to PLC data and variables			
	Configurable services	—		"Alarm viewer" "Graphic Data Editor"	
Transparent Ready communication services	I/O Scanning service	No		Yes	
	FDR service	Yes (client)		Yes (server)	
	SNMP network management service	Yes			
	Global Data service	No		Yes	
	SMTP E-mail notification service	No			
	SOAP/XML Web services	No		Server	
	Passband management	Yes			
Compatibility with processor		—		Standard and Performance processors	
Processor or module		BMX P34 2020	BMX P34 2030	BMX NOE 0100	BMX NOE 0110 ▲
Page		3/22		3/23	

▲ Available 4<sup>th</sup> quarter 2007. Before this date, please order the **BMX NOE 0100** Ethernet module with **BMX RWS C016M** memory card, same services except Data editor service with pocket PC or PDA terminal and SOAP/XML Web services.

## Processors with integrated machine and installation bus



## CANopen

ISO 11898 (9-way SUB-D connector)  
9-way SUB-D  
CSMA/CA (multiple access)  
20 Kbit/s...1 Mbit/s depending on distance

Double shielded twisted pair copper cable

63  
20 m (1 Mbit/s)...2,500 m (20 kbit/s)  
1

Serial link      Ethernet TCP/IP

- PDO implicit exchange (application data)  
- SDO explicit exchange (service data)  
Class M20

-

-

-

-

-

-

-

-

-

-

-

-

BMX P34 2010

BMX P34 2030

3/39

## Processors with integrated serial link



## Modbus and Character mode

Non-isolated, 4-wire RS 232/2-wire RS 485  
RJ45  
Master/slave with Modbus link,  
Half duplex (RS 485)/Full duplex (RS 232) in character mode  
0.3...19.2 Kbit/s

Double shielded twisted pair copper cable

32 per segment, 247 max.  
15 m (non-isolated), 1,000 m with insulating case  
1

-      CANopen      Ethernet TCP/IP

Read/write bits and words, diagnostics with Modbus link  
Send and receive character string in character mode

-

-

-

-

-

-

-

-

-

-

-

-

BMX P34 1000

BMX P34 2010

BMX P34 2020

3/43

## Overview of the Web services

In conformity with Schneider Electric Ethernet products (processors and Ethernet modules on Modicon automation platforms, distributed I/O modules, variable speed drives and gateways), standard Web functions are integrated in

**BMX P34 2020/2030** processors and the **BMX NOE 0100/110** Ethernet network modules on the Modicon M340 platform.

From a simple Internet browser, the standard Web server authorizes the following "ready-to-use" functions:

- Remote diagnostics and maintenance of products
- Display and adjustment of products (read/write variables, status)

With the **BMX NOE 0110 (1)** Ethernet network module, the Web server also offers the following functions:

- Management of PLC alarms (system and application) with partial or total acknowledgement (ready-to-use Alarm Viewer function pages).
- Hosting and display of Web pages created by the user.

The embedded Web server is a realtime data server. All the data can be presented in the form of standard Web pages in HTML format and can therefore be accessed using any Web browser that supports the embedded Java code. The standard functions provided by the Web server are supplied "ready-to-use" and thus do not require any programming of either the PLC or the client PC device supporting a Web browser.

## Standard Web server on the Modicon M340 platform

### Rack Viewer PLC diagnostics function

The Rack Viewer function can be used for PLC system and I/O diagnostics. It displays the following in realtime:

- LED status on the front panel of the PLC
- The PLC type and version
- The hardware configuration of the PLC including the status of the system bits and words
- Detailed diagnostics (2) of each of the:
  - I/O module channels or application-specific channels in the configuration
  - equipment connected on the CANopen bus.

### Data Editor read/write function for PLC data and variables

The Data Editor function can be used to create tables of animated variables for realtime read/write access to PLC data in the form of lists.

Various animation tables containing specific application variables to be monitored or modified can be created by the user and saved in the standard Web server module.

In addition when using FactoryCast Web server of the **BMX NOE 0110 (1)** module:

- The variables can be entered and displayed by their symbol (3) (S\_Pump 234)
- The write access option can be enable/disable for each variable using the Factorycast software. The write access is protected by a dedicated password
- Dedicated data monitoring tool can be use on pocket PC or PDA terminal (2).



Modicon M340 hardware configuration



Data editor variables table



(1) Module available 4<sup>th</sup> quarter 2007. Before this date, please order the **BMX NOE 0100** module with **BMX RWS C016M** memory card.

(2) Function available 4<sup>th</sup> quarter 2007.


(3) Access to symbols available 4<sup>th</sup> quarter 2007. Hence provides access to unlocated data.

# Modicon M340 automation platform

Ethernet TCP/IP network, Transparent Ready  
FactoryCast Web services



Alarm display from the diagnostic buffer

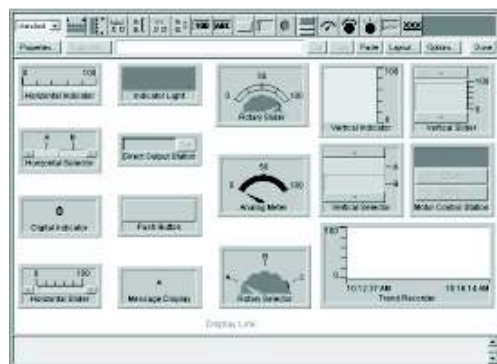

Library of predefined graphic objects



Realtime supervision graphic interface

## BMX NOE 0110 module FactoryCast Web server

With the **BMX NOE 0110** (1) Ethernet network module, the Web server offers, in addition to the standard Web services, the functions below.

### Alarm Viewer function (2)

Alarm Viewer (2) is a ready-to-use, password-protected function. This function can be used to process alarms (display, acknowledgment and deletion) managed at PLC level by the system or using diagnostic function blocks known as DFBs (system-specific diagnostic function blocks and application-specific diagnostic function blocks created by the user).

These alarms are stored in the diagnostic buffer managed by the Modicon M340 platform (special memory space for storing all the diagnostics events).

The diagnostics viewer is a Web page comprising a list of messages, which displays the following information for each alarm:

- ☐ Dates and times of the occurrence/removal of a fault
- ☐ Alarm message
- ☐ Alarm status
- ☐ Type of associated diagnostic function block (DFB)

### Graphic Data Editor function

This function is used to create the graphic views animated by the PLC variables that can be accessed via their address or their symbol (3) (access to located data). The ready-to-use graphic editor is available online, connected to the **BMX NOE 0110** module (1).

These views are created from a library of predefined graphic objects by simple copy/paste operations. The objects are configured to suit the user's requirements (color, PLC variables, name, etc).

List of proposed graphic objects:

- Analog and digital indicators
- Horizontal and vertical bar charts
- Boxes for displaying messages and entering values
- Pushbutton boxes
- Functions for recording trends
- Vats, valves, motors, etc

Customized graphic objects can be added to this list. They can be reused in user Web pages that have been created using standard software for editing HTML pages. The views thus created are saved in the **BMX NOE 0110** module and displayed using any Web browser.

### User Web page hosting and display function

The **BMX NOE 0110** Ethernet network module has a 16 Mbyte non-volatile memory (accessible as a hard disk). This allows hosting of Web pages and any user-defined Word or Acrobat Reader document (for example, maintenance manuals, wiring diagrams, etc).

The Web pages can be created using any standard tool for creation and editing in HTML format. These pages can be enhanced by inserting animated graphic objects linked to PLC variables. These animated objects are created using the Graphic Data Editor. They are then downloaded to the **BMX NOE 0110** module via configuration software of FactoryCast Web server.

The Web pages created can be used, for example, to:

- Display and modify all PLC variables in real time
  - Create hyperlinks to other external Web servers (documentation, suppliers, etc)
- This function is particularly suitable for creating graphic interfaces used for the following purposes:
- Realtime display and supervision
  - Production monitoring
  - Diagnostics and help with maintenance
  - Operator guides

(1) Module available 4<sup>th</sup> quarter 2007. Before this date, please order the **BMX NOE 0100** module with **BMX RWS C016M** memory card.


(2) Function available 4<sup>th</sup> quarter 2007.

(3) Access to symbols available 4<sup>th</sup> quarter 2007.



# Modicon M340 automation platform

Ethernet TCP/IP network, Transparent Ready  
FactoryCast Web services and SOAP/XML Web services

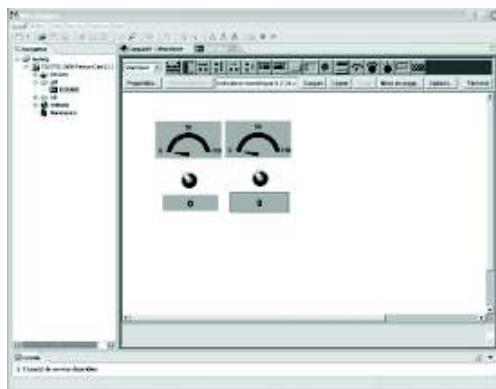

## FactoryCast Web server configuration software

The FactoryCast Web server configuration software is supplied on CD-ROM with the **BMX NOE 0110** FactoryCast module.

This software is used for configuration and administration of the Web server embedded in these modules. It is compatible with Windows 2000 and Windows XP operating systems. It provides the following functions:

- Setting the parameters of the FactoryCast functions
  - Definition of access security, passwords
  - Importing of PLC symbol databases
  - Definition of access to write-enabled variables
- Management of the Web site:
  - Management of default Web site pages
  - Management of user Web site pages (2)
  - Graphic object editor for animating Web pages
  - Downloading of Web pages between the PC and the module
  - Debugging of Web pages in online mode or in simulation mode (including animations and Java beans)

### ■ Simulation mode

The application and the Web site (including the Java animations) can be set up in online mode or in simulation mode. Simulation mode is used to test the operation of the Web application without a FactoryCast module (with no physical connection to a PLC) thereby simplifying debugging.

A graphics editor integrated in the configuration software can be used for easy customization of graphic objects (bar charts, gauges, LEDs, curves, cursors, operator input fields, alphanumeric display fields, buttons, etc).

### ■ Creation of user Web pages (1)

User Web pages are created graphically using an external HTML editor (FrontPage or similar, not supplied).

User Web pages created in the FactoryCast environment are actual animated supervision screens and can be used to monitor your process. Based on Web technologies (HTML and Java) they provide realtime access to PLC variables using the FactoryCast graphic object library (Java beans).



## SOAP/XML Web services (2)

The **BMX NOE 0110** FactoryCast module (3) incorporates a standard SOAP/XML data server that provides direct interoperability between automation devices and computer management applications (MES, ERP, SAP, ●Net application, etc).

## SOAP/XML Web Services embedded in the PLC

Communication between platforms or applications is now a necessity in a market where **e-manufacturing** and **e-business** are an essential fact of life for companies. Web service technology currently represents the most successful strategy for ensuring interoperability of heterogeneous software applications via an Intranet or the Internet, independently of any platform, operating system and programming language.

The standardisation of Web services has come about as a result of joint development between **Microsoft** and **IBM**, amongst others, validated at the **W3C (World Wide Web Consortium)** as an open "standard".

It now provides all the tools, specifications and environments needed for each platform.

Web services are based on standards such as:

- **XML (eXtensible Markup Language)**: the universal standard for data exchange
- **SOAP (Single Object Access Protocol)** protocol carried via the **HTTP (Hyper Text Transfer Protocol)** channel.
- **WSDL (Web Services Description Language)** the Web Services description language, in **XML** format.

SOAP is currently considered to be the reference protocol, including in industry. It has since been adopted by the main players such as Microsoft (●NET, SQL Server, Office, etc), IBM (Java, Web Sphere), Lotus, ORACLE, Sub, SAP, ...

(1) FactoryCast includes a plug-in for FrontPage 2000. This plug-in makes it easier to set up animations for realtime access to the PLC variables in HTML pages created by the user. They are created in the HTML editor by simply inserting customized graphic objects.

(2) Web services available 4<sup>th</sup> quarter 2007.

(3) Module available 4<sup>th</sup> quarter 2007.



# Modicon M340 automation platform

Ethernet TCP/IP network, Transparent Ready  
SOAP/XML Web services

## SOAP/XML Web services (suite)

### Embedded SOAP/XML Web Services: ModbusXMLDa Web services

This new Transparent Ready service offers the previously unused (or uncommon) possibility of making an IT/e-business application interact directly with the control system levels using the same standards.


With the implementation of ModbusXMLDa (*Modbus XML Data access*) Web services in FactoryCast Web servers, the IT engineer can easily create his own application which will access the desired information directly in the PLC and in real time.

Data exchanges are made in XML standard format in response to a request using SOAP protocol.

The implementation of Web services in control system equipment makes it easy to achieve vertical integration of the control level and the creation of even more collaborative architectures which can be used to link production systems to the corporate management systems. It brings simplified access to information, a reduction in the costs of training, development and deployments costs, plus an increase in productivity.

3

3.1

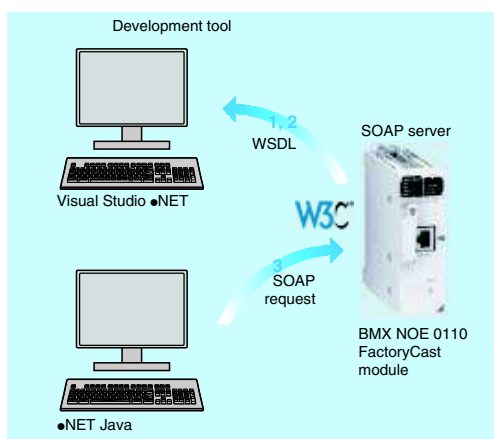

### Implementation of the ModbusXMLDa Web services: server interface

This implementation enables a SOAP client application (management level computer application, MES, ERP, etc) to communicate directly with a FactoryCast Web server module embedded in the PLC.

Exchanges are initiated by the SOAP client application (the server responds to these requests).

#### ■ Step 1: Creation of the client application with learning of the Web services.

The development environment (for example, Visual Studio .NET) looks in the FactoryCast server for the list of available services and their WSDL standard interfaces provided by the module.

■ **Step 2: Development of the client application.** The developer integrates the Web service functions using the code retrieved at the learning stage.

■ **Step 3: Execution of the client application.** The client application communicates in real time with the FactoryCast Web server module using the SOAP protocol.

Requests implemented in the **BMX NOE 0110** FactoryCast module listed provide either physical or symbolic variables data access. They are defined in the table below.


	ModbusXMLDa functions implemented in each FactoryCast module
Access to data via physical address	ReadDeviceIdentification
	ReadMultipleRegisters
	WriteMultipleRegisters
	ReadCoils
	WriteMultipleCoils
	ReadDiscreteInputs
Access to data via symbol	Read, operation to read item list value
	Write, operation to write item list value
	Browse, operation to browse item list

# Modicon M340 automation platform

Ethernet TCP/IP network, Transparent Ready  
Ethernet TCP/IP communication services

## Presentation

**BMX P34 2020 / 2030** processors, via their integrated Ethernet port (class 10) and the **BMX NOE 0100/0110** network module (class 30) provide transparent communication on a single Ethernet TCP/IP network.

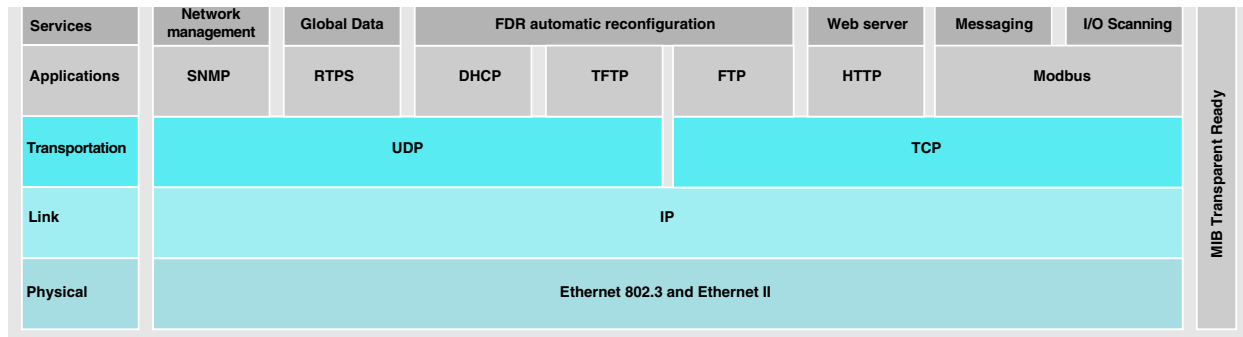

3

3.1

In addition to universal Ethernet services (HTTP, BOOTP/DHCP, FTP, etc) and with the Modicon M340 automation platform, the Transparent Ready device communication services designed for use in automation applications include:

- Modbus TCP/IP messaging for class 10 or 30 devices
- I/O Scanning service for class 30 devices
- FDR (Faulty Device Replacement) for class 10 or 30 devices
- SNMP (*Simple Network Management Protocol*) network management for class 10 or 30 devices
- Global Data, for class 30 devices
- Bandwidth management for class 10 or 30 devices

The following pages present the various options available through all of these services in order to facilitate the optimum choice of solutions when defining a system integrating Transparent Ready devices.

# Modicon M340 automation platform

Ethernet TCP/IP network, Transparent Ready  
Ethernet TCP/IP communication services

## Functions

### Ethernet universal services

#### HTTP "Hyper Text Transfer Protocol" (RFC1945)

The HTTP protocol (*HyperText Transfer Protocol*) is a protocol used to transmit Web pages between a server and a browser. HTTP has been used on the Web since 1990.

Web servers embedded in Transparent Ready automation products provide easy access to products located anywhere in the world from a standard Internet browser such as Internet Explorer.

#### BOOTP/DHCP (RFC1531)

BOOTP/DHCP is used to supply devices with IP parameters automatically. This avoids having to manage each device address individually by transferring this management to a dedicated IP address server.

The DHCP protocol (Dynamic Host Configuration Protocol) is used to assign configuration parameters to devices automatically. DHCP is an extension of BOOTP. The DHCP protocol consists of 2 components:

- One to supply the IP network address.
- One to supply the specific IP parameters to the device from a DHCP server.

*Telemecanique devices can be:*

- *BOOTP clients used to retrieve the IP address automatically from a server.*
- *BOOTP servers allowing the device to distribute IP addresses to the network stations.*

*Telemecanique has used BOOTP/DHCP standard protocols to offer the FDR (Faulty Device Replacement) service.*

#### FTP "File Transfer Protocol" (RFCs 959, 2228, and 2640)

File Transfer Protocol (FTP) provides the basic elements for file sharing. The FTP protocol is used by several systems to exchange files between devices.

#### TFTP "Trivial File Transfer Protocol" (updated firmware)

Trivial File Transfer Protocol (TFTP) is a network transfer protocol used to connect to a device and download code to it.

For example, it can be used to transfer a boot code to a workstation without a disk drive or to connect and download updates of network device firmware.

**Note:** *Transparent Ready devices implement FTP and TFTP to transfer certain information to or from products, in particular for downloads of firmware or user-defined Web pages.*

Functions (continued)

Ethernet universal services (continued)

SNMP “Simple Network Management Protocol” (RFCs 1155, 1156 and 1157)

The Internet community has developed the SNMP standard in order to manage the various network components via a single system. The network management system can exchange data with SNMP agent devices. This function allows the manager to display the status of the network and products, modify their configuration and feed back alarms in the event of a fault.

**Note:** Transparent Ready products are compatible with SNMP and can be integrated naturally in a network administered via SNMP.

COM/DCOM “Distributed Component Object Model”

COM/DCOM (Distributed Component Object Model) or OLE (Object Linking and Embedding) is the name of the technology consisting of Windows objects which enables transparent communication between Windows applications.

**Note:** These technologies are used in the OFS (OLE for Process Control Factory Server) data server software.

# Modicon M340 automation platform

Ethernet TCP/IP network, Transparent Ready  
Ethernet TCP/IP communication services

Modbus TCP/IP function codes		dec	hex
Bit access	Read n input bits	02	02
	Read n output bits	01	01
	Read exception status	07	07
	Write 1 output bit	05	05
	Write n output bits	15	0F
	Read 1 input word	04	04
	Read n input words	03	03
	Write 1 output word	06	06
	Write n output words	16	10
	Read device ID	43/14	2B/0E

Examples of Modbus TCP/IP function codes for accessing data and diagnostics.

## Functions (continued)

### Modbus standard communication protocol

Modbus, the industry communication standard since 1979 has been brought together with Ethernet TCP/IP, the medium for the Internet revolution, to form Modbus TCP/IP, a totally open protocol on Ethernet. The development of a connection to Modbus TCP/IP does not require any proprietary component, nor purchase of a license.

This protocol can easily be combined with any product supporting a standard TCP/IP communication stack. The specifications can be obtained free of charge from the following Web site: [www.modbus-ida.org](http://www.modbus-ida.org).

### Modbus TCP/IP, simple and open

The Modbus application layer is very simple and universally familiar with its 9 million installed connections. Thousands of manufacturers are already using this protocol. Many have already developed a Modbus TCP/IP connection and numerous products are presently available.

The simplicity of Modbus TCP/IP enables any field device, such as an I/O module, to communicate on Ethernet without the need for a powerful microprocessor or lots of internal memory.

### Modbus TCP/IP, high-performance

Due to the simplicity of its protocol and the fast speed of 100 Mbit/s Ethernet, the performance of Modbus TCP/IP is excellent. This allows this type of network to be used in realtime applications such as I/O scanning.

### Modbus TCP/IP, a standard

The application protocol is identical on serial link Modbus, Modbus Plus or Modbus TCP/IP. This means that messages can be routed from one network to the other without converting protocol.

Since Modbus is implemented on top of the TCP/IP layer, users can also benefit from IP routing enabling devices located anywhere in the world to communicate without worrying about the distance between them.

Schneider Electric offers a complete range of gateways for connecting a Modbus TCP/IP network to existing Modbus Plus networks, a Modbus serial link or AS-Interface bus. Please consult your Regional Sales Office.

The IANA organization (Internet Assigned Numbers Authority) has allocated the fixed port TCP 502 ("Well known" port) to the Modbus protocol. Thus Modbus has become an Internet standard.

A study by the ARC Advisory Group, the market leader in analysis of the automation and software sectors, has shown that Modbus TCP/IP is the world-leading Ethernet industrial protocol in terms of units sold in 2004.

Modbus and Modbus TCP/IP are recognized by the IEC 61158 international standard as a fieldbus. They are also compliant with the "Chinese National Standard" managed by ITEI.

### Interfacing CANopen with Modbus TCP/IP

CiA DSP 309-2 provides standardized organization of CANopen data to be carried on a Modbus TCP/IP Ethernet network. The specification reserves the Modbus 43/13 function code for this purpose. This function code is reserved exclusively for CANopen.

### Characteristics of Modbus TCP/IP

Maximum size of data:


- Read: 125 words or registers
- Write: 100 words or registers

# Modicon M340 automation platform

Ethernet TCP/IP network, Transparent Ready  
Ethernet TCP/IP communication services

## Functions (continued)

### I/O Scanning service

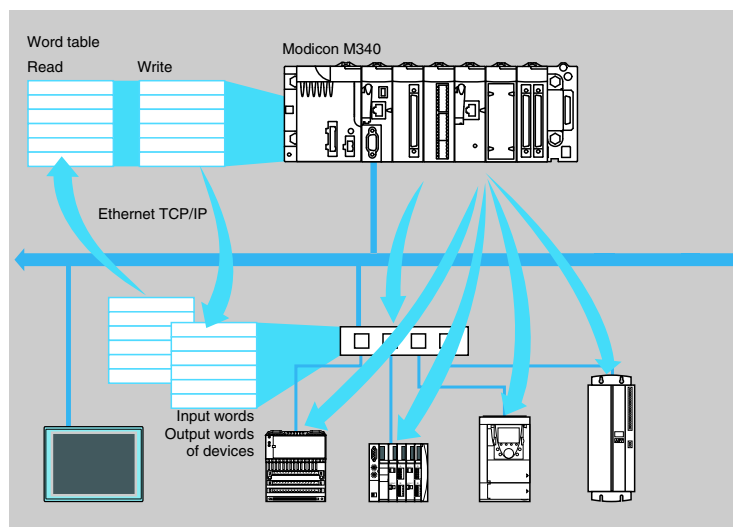

The I/O Scanning Service is used to manage the exchange of remote I/O states on the Ethernet network after simple configuration, without the need for any special programming.

I/O scanning is performed transparently by means of read/write requests according to the Modbus client/server protocol on the TCP/IP profile. This scanning principle via a standard protocol is used to communicate with any device supporting a Modbus server on TCP/IP.

This service allows you to define:

- A %MW word zone reserved for reading inputs.
- A %MW word zone reserved for writing outputs.
- Refresh periods independent of the PLC scan.

During operation, the module:

- Manages TCP/IP connections for each remote device.
- Scans devices and copies the I/O to the configured %MW word zone.
- Feeds back status words used to check that the service is working correctly from the PLC application.
- Applies pre-configured fallback values if a communication problem occurs

An offer of hardware and software products used to implement the I/O Scanning protocol on any type of device that can be connected to the Ethernet network is available (please consult the Modbus-IDA Web site: [www.modbus-ida.org](http://www.modbus-ida.org)).


### Characteristics

- Each Modicon M340 station can exchange a maximum of:
  - 100 write words
  - 125 read words
- Maximum size in the Modicon M340 PLC that manages the service (64 stations max.):
  - with **BMX NOE 0100/0110** network module, 2 %MW Kwords as inputs and 2 %MW Kwords as outputs
  - with **BMX P34 2020/2030** processor, 512 %MW words as inputs and 512 %MW words as outputs

### Diagnostics of the I/O Scanning service

There are 5 ways to perform diagnostics on the I/O Scanning service:

- Via the application program from a specific PLC data zone.
- From the setup software debug screen.
- From the PLC system diagnostic function displayed by means of an internet browser on a PC station.
- From the ConneXium diagnostic software **TCS EAZ 01P SFE10**.
- From the standard SNMP manager software.

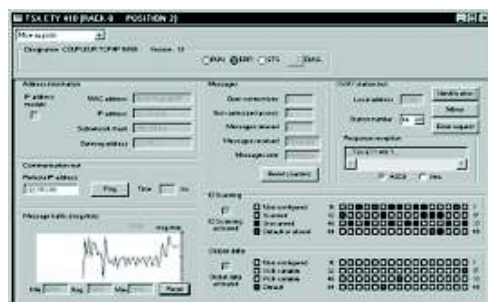

# Modicon M340 automation platform

Ethernet TCP/IP network, Transparent Ready  
Ethernet TCP/IP communication services

## Functions (continued)

### FDR (Faulty Device Replacement) service

The faulty device replacement service uses standard address management technologies (BOOTP, DHCP) and the TFTP (*Trivial File Transfer Protocol*) file management service, in the aim of simplifying maintenance of Ethernet products.

It is used to replace a faulty device with a new device with the guarantee that it will be detected, reconfigured and automatically rebooted by the system.

The main steps in replacement are:

- 1 A device using the FDR service malfunctions.
- 2 Another similar device is taken from the maintenance store, preconfigured with the Device name for the faulty device, then reinstalled on the network. Depending on the devices, addressing can be performed using spin buttons (for example, Advantys STB distributed I/O, [a](#) or Advantys OTB) or can be given via the keypad integrated in the device (for example Altivar variable speed drives).
- 3 The FDR server detects the new device, allocates it an IP address and transfers the configuration parameters to it.
- 4 The substituted device checks that all these parameters are indeed compatible with its own characteristics and switches to operational mode.

The FDR server can be:

- A Modicon M340 Ethernet module, **BMX NOE 0100/0110**
- A Modicon Premium Ethernet module, **TSX ETY 4103/5103**
- A Modicon Quantum PLC Ethernet module, **140 NOE 771 01/771 11**
- A Modicon Premium processor with integrated Ethernet port, **TSX P57 ●●●●M**
- A Modicon Quantum processor with integrated Ethernet port, **140 CPU 651 50/60**




"NIM" network module  
for Advantys STB I/O

# Modicon M340 automation platform

Ethernet TCP/IP network, Transparent Ready  
Ethernet TCP/IP communication services

## Functions (continued)

### Global Data service

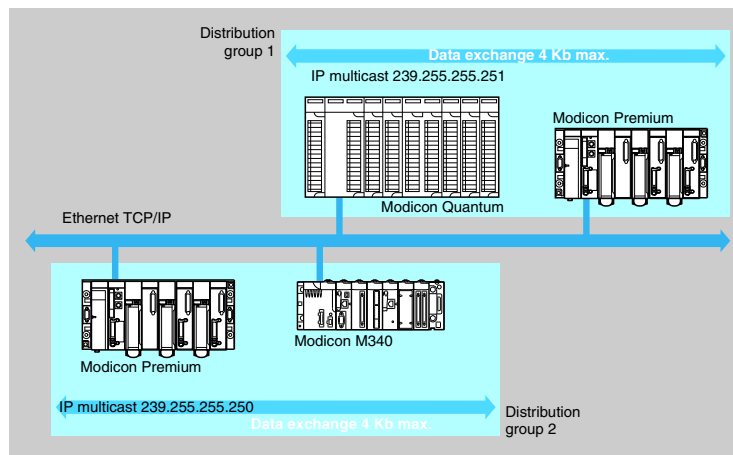

The Global Data service exchanges data in real time between stations belonging to the same distribution group. It is used to synchronize remote applications, or even to share a common database between a number of distributed applications. Exchanges are based on a producer/consumer type standard protocol, guaranteeing optimum performances with a minimum load on the network. This RTPS (*Real Time Publisher Subscriber*) protocol is promoted by Modbus-IDA (*Interface for Distributed Automation*), and is already a standard adopted by several manufacturers.

### Characteristics

A maximum of 64 stations can participate in Global Data within a single distribution group.

Each station can:

- Publish 1 variable of 1024 bytes. The publication period can be configured from 1 to n processor master task (*Mast*) periods.
- Subscribe between 1 and 64 variables. The validity of each variable is controlled by status bits (*Health Status bits*) linked to a refresh timeout configurable between 50 ms and 1 s. Access to an element of the variable is not possible. The total size of subscribed variables amounts to 4 contiguous Kbytes.

To further optimize the performance of the Ethernet network, Global Data can be configured with the "multicast filtering" option which, combined with switches in the ConneXium range (see pages 3/26 to 3/33) distribute data only to Ethernet ports where there is a station subscribed to the Global Data service. If these switches are not used, Global Data is sent in "multicast" mode to all switch ports.


### Global Data service diagnostics

The diagnostic screens show the status of Global Data using a color code:

- Configured/not configured/faulty
- Published/subscribed

There are 5 ways to perform diagnostics on the Global Data service:

- Via the application program from a specific PLC data zone.
- From the setup software debug screen.
- From the PLC system diagnostic function displayed by means of an internet browser on a PC station.
- From the ConneXium diagnostic software **TCS EAZ 01P SFE10**.
- From the standard SNMP manager software.

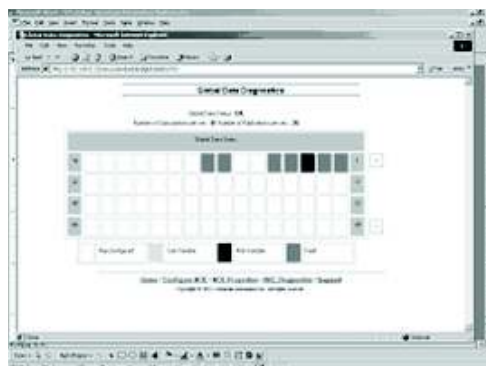



# Modicon M340 automation platform

Ethernet TCP/IP network, Transparent Ready  
Ethernet TCP/IP communication services

## Functions (continued)

### SNMP network management service

From a network management station, the SNMP (*Simple Network Management Protocol*) protocol monitors and checks all components of the Ethernet architecture and thus ensures quick diagnostics in the event of a problem.

It is used to:

- Interrogate network components such as computer stations, routers, switches, bridges or terminal devices to display their status.
- Obtain statistics about the network on which devices are connected.

This network management software adheres to the conventional client/server model. However, to avoid confusion with other communication protocols that use this terminology, we talk instead about:

- ConneXview network diagnostics software, **TCS EAZ 01P SFE10**. For more informations, please consult our "Machines & Installations with industrial communications" catalogue
- Network manager for the client application that operates on the computer station.
- SNMP agent for the network device server application


Transparent Ready devices can be managed by any SNMP network manager, including HP Openview and IBM Netview.

The SNMP (*Simple Network Management Protocol*) standard protocol is used for access to configuration and management objects that are contained in the device MIB (Management Information Base). These MIBs must comply with certain standards to be accessed by any commercially-available manager, but depending on the complexity of products, manufacturers can add certain objects to private databases.

The Transparent Ready private MIB presents management objects specific to the Telemecanique offer. These objects simplify the installation, setup and maintenance of Transparent Ready devices in an open environment using standard network management tools.

Transparent Ready devices support 2 levels of SNMP network management:

- The Standard MIB II interface: An initial level of network management is accessible via this interface. It enables the manager to identify the devices making up the architecture and retrieve general information on the configuration and operation of Ethernet TCP/IP interfaces.
- The Transparent Ready MIB interface: the management of Transparent Ready devices is improved via this interface. This MIB has a set of information enabling the network management system to supervise all the Transparent Ready services. The Transparent Ready MIB can be downloaded from the FTP server of any Transparent Ready Ethernet module in a PLC.

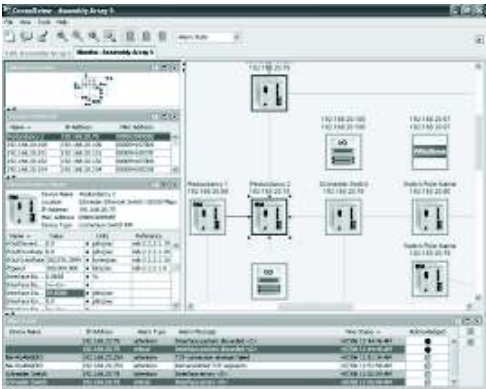

Automatic recognition of IP devices via the ConneXview diagnostic software for Ethernet industrial networks

# Modicon M340 automation platform

Ethernet TCP/IP network, Transparent Ready  
Performance

## 3

## 3.1

## Selecting the communication architecture

When choosing an architecture, it is advisable to take account of the required performance as early as possible. To do this, the developer must:

- 1 Know exactly what he needs:
  - ☐ quantity and type of devices to be connected to one another
  - ☐ volume and type of exchanges
  - ☐ expected response times
  - ☐ environment
- 2 Compare his needs with the characteristics of the available offers, being aware that the actual performance level between any 2 points in an architecture is dependent on the weakest link in the chain, which may:
  - ☐ depend on the hardware
  - ☐ but also depends on the applications (size, architecture, operating system, machine power rating, etc) which are often only vaguely defined at this stage of the project.
- 3 Work out from this which is the most suitable architecture.


The purpose of the next few pages is to provide the main information and instructions needed to answer the second point. Given that the performance of an Ethernet architecture is linked to several parameters, these pages do not supply all the information needed to calculate the network performance. Their aim is to focus on the following main aspects:

- **Instructions for calculating the network load** so as to design an Ethernet network that meets the demands of the applications.
- **Application response time** to be obtained depending on the configuration used, see page 3/17 to 3/19.
- **Processing capacities of Modicon M340, Modicon Premium and Modicon Quantum platforms** used to select the processor and define the number of Ethernet connections required on the PLC depending on the application, see pages 3/20 and 3/21.

## Calculating the network load

### Introduction

When calculating the load on an Ethernet network, all the communication services of all the peripheral devices connected to the network need to be calculated. Because of the outstanding performance of the Ethernet network, the load is often less than the limits of the Ethernet network and does not greatly affect the application response time. This phenomenon is explained by the high speed of the Ethernet network: the network transaction time is 10% less than the application response time. In order to ensure a low network load and avoid large theoretical calculations, it is highly advisable to separate the collision domain so as to limit the network load, using only the switched network (tree, star or daisy-chain topology).

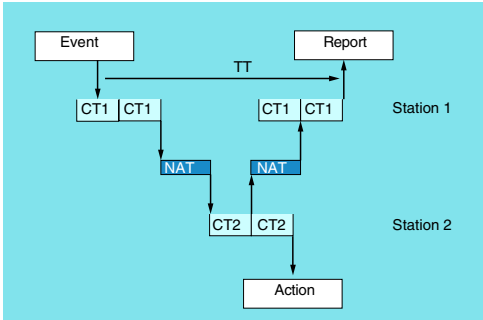

Application response time

Modbus (or Uni-TE) messaging service response time

Exchanges between the PLC processor and the Ethernet module are synchronous with the PLC scan time, just like the I/O exchanges. On occurrence of the event (an input set to state 1 for example), a message can only be sent after this input has been taken into account (start of the next cycle) and execution of the PLC program (Modicon M340, Modicon Premium or Modicon Quantum), are on average around 1.5 cycle times after occurrence of the event.


The network access time (NAT) appearing in the table below in ms, adds together the module transit time and the waiting time before the message can be sent on the network.

Processing Modbus TCP/IP message requests	Modicon M340		Modicon Premium			Modicon Quantum	
	BMX NOE 0100 BMX NOE 0110	BMX P34 2020 BMX P34 2030	TSX ETY 210 TSX ETY 110WS	TSX ETY 4103/5103 TSX WMY 100 TSX P57 10...57 50		140 NOE 771 01/111 140 CPU 113/311 ●● 140 CPU 434/534 1●	140 CPU 65 150/160 140 CPU 67 160
Network access time NAT	< 10 ms	< 10 ms	< 25 ms	< 10 ms		< 10 ms	< 10 ms

The transaction time TT integrates the delay between sending a message from a client station 1, its reception by the server station 2, processing the request, sending the response and it being taken into account by the station 1 (updating an output for example).

As shown in the above block diagram:

- The transaction time TT should be between:  
$$2 \times CT1 + 2 \times NAT < TT < 4 \times CT1 + CT2 + 2 \times NAT$$
- The average duration  $TT_{av}$  is equivalent to:  
$$TT_{av} = 3 \times CT1 + 0.5 \times CT2 + 2 \times NAT$$

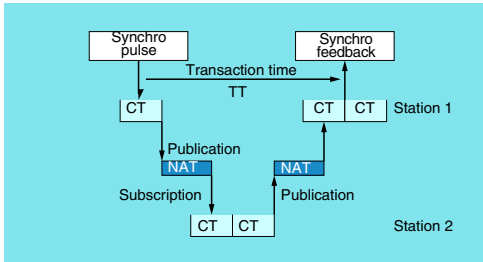

Global Data service response time


The transaction time TT integrates the delay between publication of a Global Data service by station 1, its reception and its processing by the remote station 2 and it being resent to the initial station 1:

For an exchanged variable:

- If  $CT < 5$  ms,  
transaction time:  $TT = 5 \text{ to } 6 \times CT$
- If  $CT \geq 10$  ms,  
transaction time:  $TT = 3 \times CT$

# Modicon M340 automation platform

Ethernet TCP/IP network, Transparent Ready  
Performance

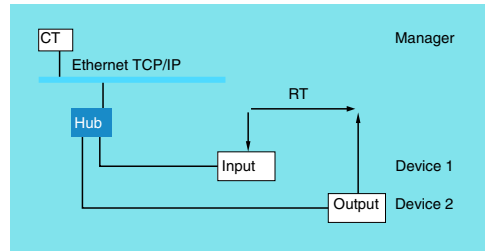


## Application response time (continued)

### I/O Scanning service response time

The response time RT includes the time between taking a remote input into account and updating the state of a remote output. It includes the processing time in the PLC.

This response time RT consists of the following parameters:

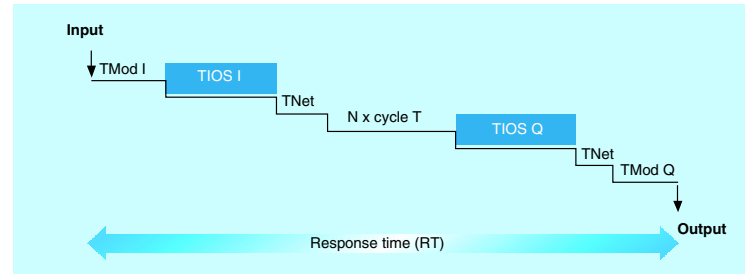

□ TMod In and TMod Out: Response time of the read/written device, excluding the electrical transit time at the input/output (TMod depends on the device, usually between 1 and 8 ms)

□ TIOS In and TIOS Out: Time between 2 read/write operations on the same device (0.3 ms x number of scanned devices), at least equivalent to the configured scan time

As TIOS is executed in parallel with the PLC scan, it can be hidden with respect to the response time RT).

□ Cycle T: PLC scan time.

□ TNet : propagation time on the network (depends on the application, usually TNet = 0.05 ms at 10 Mbit/s and 0.005 ms at 100 Mbit/s).

The response time RT can be estimated with the following 3 formulas:

■ **RT<sub>min</sub>**, minimum response time with TIOS hidden and 1 PLC scan:

$$RT_{min} = (TMod In + 0) \times TIOS In + (Tnet + N) \times cycle T + (0 \times TIOS Out) + Tnet + TMod Out$$

■ **RT<sub>typ</sub>**, typical response time with 0.5 TIOS hidden:

$$RT_{typ} = TMod In + 0,5 \times TIOS In + (Tnet + N) \times Cycle T + (0,5 \times TIOS Out) + Tnet + TMod Out$$

■ **RT<sub>max</sub>**, maximum response time with TIOS not hidden:

$$RT_{max} = TMod In + TIOS In + (Tnet + N) \times Cycle T + TIOS Out + Tnet + TMod Ou$$

# Modicon M340 automation platform

Ethernet TCP/IP network, Transparent Ready  
Performance

## Application response time (continued)


### I/O Scanning service response time (continued)

Below are the TMod In and TMod Out response times:

Type of distributed I/O	Response time	Min.	Typical	Max.
Momentum 170 ENT 110 02	TMod In	1 ms	1 ms	1 ms
	TMod Out	5 ms	5 ms	5 ms
Momentum 170 ENT 110 01	TMod In or TMod Out	4 ms	6 ms	8 ms
Advantys STB STB NIP 2212	TMod In or TMod Out	2 ms	3 ms	4 ms

Below are the TIOS In/TIOS Out times measured between 2 scan cycles (Ethernet network with switches)

Time (ms)

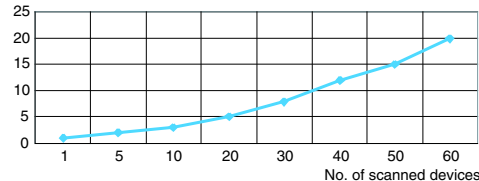

Below is the number of processor cycles N:

Number of processor cycles N	Min.	Typical	Max.
Modicon M340 platform with modules: <b>BMX NOE 0100</b> and <b>BMX NOE 0110</b>	2	2.5	3
Modicon Premium platform with modules: <b>TSX ETY 4103</b> and <b>TSX ETY 5103</b>			
Modicon Quantum platform with modules: <b>140 NOE 771 01</b> and <b>140 NOE 771 11</b>			
Modicon M340 processors: <b>BMX P34 2020</b> and <b>BMX P34 2030</b>			
Modicon Premium processors: <b>TSX P57 26/3634M</b> , <b>TSX P57 26/2823M</b> and <b>TSX P57 36/4823AM</b>			
Modicon Premium processors: <b>TSX P57 4634M</b> and <b>5634M</b>	1	1	2
Modicon Quantum processors: <b>140 CPU 651 50</b> and <b>140 CPU 651 60</b>			

# Modicon M340 automation platform

Ethernet TCP/IP network, Transparent Ready  
Performance

## Processing capacities of Modicon platforms

### Processing capacity

Use the table below to compare for each station, the total number of messages received on the Modbus (or Uni-TE) messaging service if used (value R1, R2 or Ri) with the station processor capacity.

Processing Modbus requests for each PLC scan

Modicon M340, Modicon Premium/Atrium platforms	Messages received
Communication using EFs or EFBs (PL7 or Unity Pro)	
Total messages received by the PLC from all the communication modules (1)	TSX 57 10
	4 messages/cycle
	BMX P34 20/TSX 57 20
	8 messages/cycle
	TSX 57 30
	12 messages/cycle
	TSX 57 40
	16 messages/cycle
	TSX 57 50 (2)
	16/20 messages/cycle

Modicon Quantum platform	Limitations of the integrated port		Limitations of the communication modules		Ethernet modules per PLC
	All types of communication request	Additional read/write 4x registers	All types of communication request	Additional read/write 4x registers	
140 CPU 113 (3)	–	–	1 message/cycle	4 messages/cycle	max. 2
140 CPU 311	–	–	1 message/cycle	4 messages/cycle	max. 2
140 CPU 434/534	–	–	4 messages/cycle	8 messages/cycle	max. 6
140 CPU 651	16 messages/cycle	16 messages/cycle	4 messages/cycle	8 messages/cycle	max. 6

messages/cycle: number of messages received per cycle from the PLC master task (typical cycle of 50 to 100 ms)

Example:

Quantum 140 CPU 434 12● processor with 4 Ethernet 140 NOE 771 ●1 modules:

- 20 messages/cycle for all types of communication request, and
- 32 messages/cycle for the read/write 4x registers

### Ethernet transaction processing capacity

Compare, for each station, the total number of messages received  $\Sigma$  [values Ri, Rj] and the total number of messages sent  $\Sigma$  [values Ei, Ej] (for example, for station N) with the Ethernet transaction processing capacity indicated below.

Use the elements below for the Ethernet connection per PLC, rather than the number of transactions required by the application.

Ethernet transaction processing capacity	Modicon M340 BMX		Modicon Premium TSX			Modicon Quantum140	
	NOE 0100 NOE 0110	P34 2020 P34 2030	ETY 210 ETY 110WS	ETY 4103/5103 WMY 100 (4) P57 10/20/30/40	P57 50	NOE 771 01/11 NWM 100 00 (4)	CPU 65 150/160 CPU 67 160
Modbus messaging	450 transactions/s	200 transactions/s	60 transactions/s	450 transactions/s	500 transactions/s	350 transactions/s	350 transactions/s
I/O Scanning service	2,000 transactions/s	Service not available	Service not available	2,000 transactions/s	2,000 transactions/s	2,000 transactions/s	2,000 transactions/s
Publication of Global Data	800 transactions/s			800 transactions/s	800 transactions/s	800 transactions/s	800 transactions/s

(1) A temporary overload, due for example to an adjustment terminal or the temporary connection of an Internet browser, on which a few PLC scans are permitted.

(2) Only with Unity Pro software.

(3) Only with Concept/ProWORX software.

(4) Module not featuring I/O Scanning and Global Data services (TSX WMY 100 and 140 NWM 100 00).

# Modicon M340 automation platform

Ethernet TCP/IP network, Transparent Ready  
Performance

## Processing capacities of Modicon platforms (continued)


### Maximum number of simultaneous TCP/IP connections

The maximum number of simultaneous TCP/IP connections depends on the platform as well as the type of connection to the Ethernet network:

- The 10/100BASE-TX port in network modules.
- The 10/100BASE-TX port integrated in processors.

Number of simultaneous TCP/IP connections	Modicon M340		Modicon Premium		Modicon Quantum	
	BMX NOE 0100 BMX NOE 0110	BMX P34 2020 BMX P34 2030	TSX ETY 210 TSX ETY 110WS	TSX ETY 4103/5103 TSX WMY 100 TSX P57 10...57 50	140 NOE 771 01/11 140 CPU 113/311 ●● 140 CPU 434/534 14B	140 CPU 65 150 140 CPU 65 160
Client	16	16	32	16 (1)	16 (1)	16 (1)
Server	16	16		64 (1)	64 (1)	64 (1)

(1) With 64 simultaneous TCP/IP connections maximum (clients and servers).

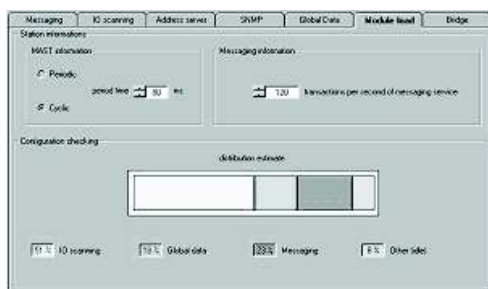

## Managing the passband of Ethernet TCP/IP modules

The passband management service indicates the load level of the Ethernet network module. This allows the user to monitor any drift and anticipate any problems.

The Ethernet module load is indicated in 3 ways:

- Expected load in the Unity Pro/PL7 configuration screen.
- Actual load in the Unity Pro/PL7 diagnostics/debug screen, as well as in the diagnostics pages via the Web. It is displayed in the form of a bar chart animated in real time.
- In the SNMP interface for access by the SNMP network manager.

The passband is indicated as a percentage for each of the following services:

- Modbus (and Uni-TE) messaging
- I/O Scanning
- Global Data
- Other



Ethernet port integrated in  
the BMX P34 2020/2030

or

Ethernet module  
BMX NOE 0100/0110

## Ethernet solutions with the Modicon M340 platform

The M340 PLC has 2 types of connection to the Ethernet network:


- The 10/100BASE-TX port integrated in **BMX P34 2020/2030** Performance processors, which also process the application, exchanges with other modules supported by the rack and other communication ports (CANopen bus or Modbus serial link).
- The 10/100BASE-TX port in the **BMX NOE 0100** and **BMX NOE 0110** module on which, unlike the Performance processor, all the resources are allocated to Ethernet TCP/IP communication.

These fundamentally different hardware characteristics result in equally different capacities in terms of services and performance:

- The integrated port is a low-cost way of satisfying applications that are not too demanding in terms of communication (less than 500 useful messages/s) in environments little affected by interference.
- Where there are a large number of exchanges, or networks are heavily polluted, use of a dedicated module is unavoidable.

# Modicon M340 automation platform

Processors with integrated Ethernet TCP/IP port

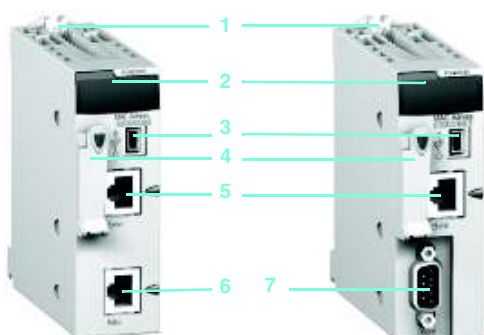

## Description

**BMX P34 2020** and **BMX P34 2030** Modicon M340 processors with integrated Ethernet port have the following on the front panel:

- 1 Safety screw for locking the module in its slot (marked 0) in the rack
- 2 A display unit including at minimum 3 LEDs relating to the Ethernet port:
  - ETH ACT LED (green): Activity on the Ethernet TCP/IP network
  - ETH STS LED (green): Ethernet TCP/IP network status
  - ETH 100 LED (red): Data rate on the Ethernet TCP/IP network (10 or 100 Mbit/s)
- 3 A mini B USB connector for a programming terminal (or Magelis XBT GT operator interface)
- 4 A slot equipped with its Flash memory card for saving the application and activating the standard Web server, Transparent Ready class B10 .
- 5 An RJ45 connector for connection to the 10BASE-T/100BASE-TX Ethernet TCP/IP network

Also included, depending on the model:

- 6 **BMX P34 2020** processor: An RJ45 connector for the Modbus serial link or character mode link (RS 232C/RS 485, 2-wire, non-isolated)
- 7 **BMX P34 2030** processor: A 9-way SUB-D connector for the master CANopen machine and installation bus

On the back panel: 2 rotary switches for assigning the IP address in one of 3 modes:

- Address set by the position of the two switches
- Address set by the application parameters
- Address set by the Ethernet TCP/IP BOOTP server

## Characteristics

Module type	Unity Pro software	BMX P34 2020	BMX P34 2030
<b>Transparent Class</b>		B10	
<b>Ready services</b>	Standard Web server	Rack Viewer access to the product description and status and to the PLC diagnostics Data Editor access to the configuration functions and PLC variables	
	Standard Ethernet TCP/IP communication service	Modbus TCP messaging (read/write data words)	
	Ethernet TCP/IP advanced communication services	I/O Scanning	–
		Global Data	–
		FDR Client	Automatic assignment of IP address and network parameters
		SMTP E-mail notification	–
		SNMP network administrator	Yes
		SOAP/XML Web services	No
		Bandwidth management	Yes
<b>Structure</b>	Physical interface	10BASE-T/100BASE-TX (RJ45)	
	Data rate	10/100 Mbit/s with automatic recognition	
	Medium	Twisted pair	
<b>Modicon M340 processor</b>	No. of discrete I/O	1024	
	No. of analog I/O	256	
	No. of application-specific channels	36	
	Max. no. of Ethernet TCP/IP connections	2 (integrated port and BMX NOE 0100/0110 network module)	
	Other integrated communication ports	Modbus serial link or character mode	CANopen bus
	Operating temperature	0...+ 60 °C	
	Relative humidity	10...95% non condensing during operation	
	Degree of protection	IP 20	
	Power supply	Via the power supply of the rack supporting the processor	
	Conformity to standards	IEC/EN 61131-2, UL 508, CSA 22.2 n°142, CSA 22.2 n°213 Class 1 Division 2 , C€	
	LED indicators	Activity on the Ethernet TCP/IP network (ETH ACT, green) Status of the Ethernet TCP/IP network (ETH STS, green) Data rate on the 10 or 100 Mbit/s Ethernet TCP/IP network, (ETH 100, red) 4 LEDs specific to processor operation (RUN, ERR, I/O, CARD ERR) 1 or 2 LEDs specific to the other communication ports (SER COM or CAN RUN and CAN ERR) (2)	

## References



BMX P34 2020

BMX P34 2030

Description	I/O capacity Memory capacity	Other integrated communication ports	Reference	Weight kg
<b>Processors with integrated Ethernet link</b>	1024 discrete I/O 256 analog I/O 36 app-sp. channels	Modbus serial link or character mode CANopen bus	<b>BMX P34 2020</b>  <b>BMX P34 2030</b>	0.205  0.215
Transparent Ready class B10	4096 Kb integrated			


(1) SER COM for serial link or CAN RUN and CAN ERR for CANopen bus.



# Modicon M340

## automation platform

### Ethernet TCP/IP network module



#### Presentation

The **BMX NOE 0100** and **BMX NOE 0110** modules are a standard module occupying a single slot in the rack of the Modicon M340 platform equipped with a Standard processor or associated Performance processor (maximum of 1 module per configuration).

#### Description

The **BMX NOE 0100** module has the following on the front panel:

- 1 Safety screw for locking the module in its slot in the rack
- 2 A display unit consisting of 6 LEDs, including 3 relating to the Ethernet port:
  - ETH ACT LED (green): Activity on the Ethernet TCP/IP network
  - ETH STS LED (green): Ethernet TCP/IP network status
  - ETH 100 LED (red): Data rate on the Ethernet TCP/IP network (10 or 100 Mbit/s)
- 3 A slot equipped with its Flash memory card for application saving and activating the standard Web server, Transparent Ready class B30 or C30 depending on model
- 4 An RJ45 connector for connection to the 10BASE-T/100BASE-TX Ethernet TCP/IP network
- 5 A pencil-point RESET pushbutton for a cold restart of the module

On the back panel: 2 rotary switches for assigning the IP address in one of 3 modes:

- address set by the position of the two switches
- address set by the application parameters
- address set by the Ethernet TCP/IP network BOOTP server

#### Characteristics

Module type	Unity Pro software	BMX NOE 0100	BMX NOE 0110
<b>Transparent Class</b>		B30	C30
<b>Ready services</b>	Standard Web server	Rack Viewer access to the product description and status and to the PLC diagnostics	
		Data Editor access to PLC variable via PC terminal	Data Editor access to PLC variable via PC terminal, pocket PC or PDA terminal
	Configurable Web server	Yes	Yes
	User Web pages (available size)	—	Yes (16 Mb)
	Standard Ethernet TCP/IP communication service	Modbus TCP messaging (read/write data words)	
Ethernet TCP/IP advanced communication services	I/O Scanning	Yes	
	Global Data	Yes	
	FDR server	Automatic assignment of IP address and network parameters	
	SMTP E-mail notification	—	
	SNMP network administrator	Yes	
	SOAP/XML Web services	—	Server
	Bandwidth management	Yes	
<b>Structure</b>	Physical interface	10BASE-T/100BASE-TX (RJ45)	
	Data rate	10/100 Mbit/s with automatic recognition	
	Medium	Twisted pair	
<b>Network module</b>	Operating temperature	0...+ 60 °C	
	Relative humidity	10...95% non condensing during operation	
	Degree of protection	IP 20	
	Power supply	Via the power supply of the rack supporting the processor	
	Conformity to standards	IEC/EN 61131-2, UL 508, CSA 22.2 n°142, CSA 22.2 n°213 Class 1 Division 2, C	
	LED indicators	Activity on the Ethernet TCP/IP network (ETH ACT, green) State of the Ethernet TCP/IP network (ETH STS, green) Data rate on the 10 or 100 Mbit/s Ethernet TCP/IP network, (ETH 100, red) 3 LEDs specific to module operation (RUN, ERR, CARD ERR)	

#### References



BMX NOE 0100/0110

Description	Data rate	Transparent Ready class	Reference	Weight kg
Ethernet TCP/IP network module	10/100 Mbit/s	B30	<b>BMX NOE 0100</b>	0.200
		C30	<b>BMX NOE 0110</b> ▲	0.200

▲ Available 4<sup>th</sup> quarter 2007

Before this date, please order the **BMX NOE 0100** Ethernet module with **BMX RWS C016M memory card**, same services except Data editor service with pocket PC or PDA terminal and SOAP/XML Web services.

# Modicon M340

## automation platform


Ethernet TCP/IP network, Transparent Ready  
Cabling system: ConneXium hub

### Presentation


Hubs (*concentrators*) are used for transmitting signals between several media (ports). Hubs are "plug and play" devices that do not need any configuration. The use of hubs makes it possible to create the following topologies:

- Star topology using hubs
- Tree topology using hubs

Consult our catalogue "Ethernet TCP/IP and Web technologies, Transparent Ready".



Star topology



Tree topology

### Characteristics and reference

Transparent  
Ready



Hubs			
Interfaces	Copper cable ports	Number and type	4 x 10BASE-T ports
		Shielded connectors	RJ45
		Medium	Shielded twisted pair, category CAT 5E
		Total length of pair	100 m
	Fiber optic ports	Number and type	—
Topology	Number of cascaded hubs		max. 4
	Number of hubs in a ring		—
Redundancy			P1 and P2 redundant power supplies
Power supply	Voltage		24 V (18...32) V~, safety extra low voltage (SELV)
	Power consumption		80 mA (130 max. at 24 V ~)
	Removable connector		5-way
Operating temperature			0...+ 60 °C
Relative humidity			10...95% non condensing
Degree of protection			IP 30
Dimensions		W x H x D	40 x 125 x 80 mm
Mounting			On symmetrical DIN rail, 35 mm wide
Weight			0.530 kg
Conformity to standards			cUL 60950, UL 508 and CSA 142, UL 1604 and CSA 213 Class 1 Division 2, C€, GL
			FM 3810, FM 3611 Class 1 Division 2
LED indicators			Power supply, activity, link
Alarm relay			Power supply fault, Ethernet network fault or communication port fault (1 A max. volt-free contact at 24 V ~)
Reference			499 NEH 104 10

# Modicon M340 automation platform

Ethernet TCP/IP network, Transparent Ready  
Cabling system: ConneXium transceivers

## Presentation


The use of ConneXium transceivers makes it possible to perform the following:

- Creation of linear fiber optic bus topologies, for products with twisted pair cable Ethernet connection.

- Interfacing products with twisted pair cable Ethernet connection with a fiber optic cable.

Transceivers are “plug and play” devices that do not need any configuration. Consult our catalogue “Ethernet TCP/IP and Web technologies, Transparent Ready”.

ConneXium transceivers provide fiber optic connections for transmission in areas subject to interference (high levels of electromagnetic interference) and for long distance communications.



Linear topology on optical fiber

## Characteristics and reference

Transparent  
Ready




Transceivers			
Interfaces	Copper cable ports	Number and type	1 x 100BASE-TX port
		Shielded connectors	
		Medium	Shielded twisted pair, category CAT 5E
		Total length of pair	100 m
	Fiber optic ports	Number and type	1 x 100BASE-FX port
		Connectors	SC
		Medium	Multimode optical fiber
		Length of optical fiber	
		50/125 µm fiber	3000 m (1)
		62.2/125 µm fiber	3000 m (1)
		Attenuation analysis	
		50/125 µm fiber	8 dB:
		62.2/125 µm fiber	11 dB:
Redundancy		P1 and P2 redundant power supplies	
Power supply	Voltage	24 V (18...32) ---, safety extra low voltage (SELV)	
	Power consumption	160 mA (190 max. at 24 V ---)	
	Removable connector	5-way	
Operating temperature		0...+ 60 °C	
Relative humidity		10...95% non condensing	
Degree of protection		IP 20	
Dimensions		W x H x D	47 x 135 x 111 mm
Mounting		On symmetrical DIN rail, 35 mm wide	
Weight		0.230 kg	
Conformity to standards			cUL 60950, UL 508 and CSA 142, UL 1604 and CSA 213 Class 1 Division 2, C€, GL
LED indicators			P1 and P2 power supplies, Ethernet link/port status
Alarm relay			Power supply fault, Ethernet network fault or communication port fault (1 A max. volt-free contact at 24 V ---)
Reference			499 NTR 10 100

(1) Length dependent on the attenuation analysis and attenuation of the optical fiber (typical value: 2000 m).

# Modicon M340 automation platform

Ethernet TCP/IP network, Transparent Ready  
Cabling system: ConneXium unmanaged switches

## Presentation

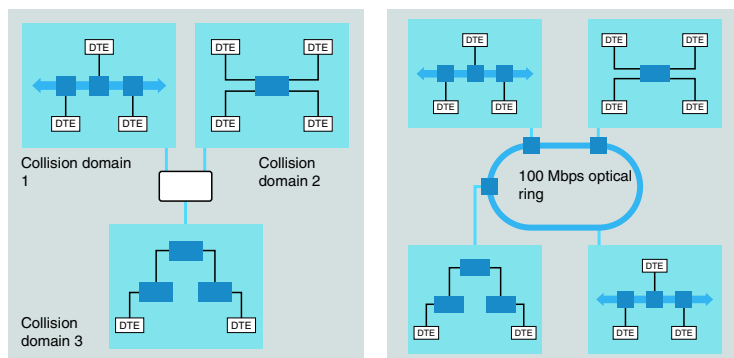

Switches are used to increase the limits of architectures based on hubs or transceivers, by separating collision domains.

Higher layer communication is provided between the ports, and collisions at link layer are not propagated (filtering). They therefore improve performance by better allocation of the pass band due to the reduction of collisions and the network load.

Certain Connexium switch models also enable redundant architectures to be created on twisted pair copper ring or fiber optic.

Switches are "plug & play" devices that do not need any configuration. They can also be managed remotely via the SNMP or HTTP protocols for monitoring and diagnostics purposes.

Consult our catalogue "Ethernet TCP/IP and Web technologies, Transparent Ready".

## Characteristics and references: twisted pair

Transparent Ready



Switches			Optimized, copper twisted pair, unmanaged	Copper twisted pair, unmanaged
Interfaces	Copper cable ports	Number and type	5 x 10BASE-T/100BASE-TX ports	
		Shielded connectors	RJ45	
		Medium	Shielded twisted pair, category CAT 5E	
		Total length of pair	100 m	
	Fiber optic ports	Number and type	–	
		Connectors	–	
		Medium	–	
		Length of optical fiber		
		50/125 µm fiber	–	
		62.2/125 µm fiber		
		9/125 µm fiber	–	
		Attenuation analysis		
		50/125 µm fiber	–	
		62.2/125 µm fiber		
9/125 µm fiber	–			
Topology	Number of switches	Cascaded	Unlimited	
		Redundant in a ring	–	
Redundancy			–	P1 and P2 redundant power supplies
Power supply	Voltage		24 V $\pm$ (19.2...30)	24 V $\pm$ (18...32) safety extra low voltage (SELV)
	Power consumption	mA max.	120	125 (290 max.)
	Removable connector		3-way	5-way
Operating temperature			0...+ 60 °C	
Relative humidity			10...95% non condensing	
Degree of protection			IP 20	
Dimensions		W x H x D	75.2 x 143 x 43 mm	47 x 135 x 111 mm
Mounting			On symmetrical DIN rail, 35 mm wide	
Weight			0.190 kg	0.230 kg
Conformity to standards			UL 508, CSA 1010, EN 61131-2	cUL 60950, UL 508 and CSA 142, UL 1604 and CSA 213 Class 1 Division 2, C€, GL
LED indicators			Power supply, link status, data rate	P1 and P2 power supplies, Ethernet link/port status
Alarm relay			–	Power supply fault, Ethernet network fault or communication port fault (1 A max. volt-free contact at 24 V $\pm$ )
Reference			499 NES 251 00	499 NES 181 00

# Modicon M340

## automation platform

Ethernet TCP/IP network, Transparent Ready  
Cabling system: ConneXium unmanaged switches

### Characteristics and references: 5 ports, twisted pair and fiber optic



Switches			Copper twisted pair and fiber optic, unmanaged			
Interfaces	Copper cable ports	Number and type	4 x 10BASE-T/ 100BASE-TX ports	3 x 10BASE-T/ 100BASE-TX ports	4 x 10BASE-T/ 100BASE-TX ports	3 x 10BASE-T/ 100BASE-TX ports
		Shielded connectors	RJ45			
		Medium	Shielded twisted pair, category CAT 5E			
		Total length of pair	100 m			
	Fiber optic ports	Number and type	1 x 100BASE-FX port	2 x 100BASE-FX ports	1 x 100BASE-FX port	2 x 100BASE-FX ports
		Connectors	SC			
		Medium	Multimode optical fiber		Single mode optical fiber	
		Length of optical fiber				
		50/125 µm fiber	5,000 m (1)		–	
		62.2/125 µm fiber	4,000 m (1)		–	
		9/125 µm fiber	–		32,500 m (2)	
		Attenuation analysis				
		50/125 µm fiber	8 dB		–	
		62.2/125 µm fiber	11 dB		–	
		9/125 µm fiber	–		16 dB	
Topology	Number of switches	Cascaded	Unlimited			
		Redundant in a ring	–			
Redundancy			P1 and P2 redundant power supplies			
Power supply	Voltage		24 V --- (18...32), safety extra low voltage (SELV)			
	Power consumption	mA max.	200	240	200	240
	Removable connector		5-way			
Operating temperature			-40...+70 °C			
Relative humidity			10...95% non condensing			
Degree of protection			IP 20			
Dimensions		W x H x D	47 x 135 x 111 mm			
Mounting			On symmetrical DIN rail, 35 mm wide			
Weight			0.330 kg	0.335 kg	0.330 kg	0.335 kg
Conformity to standards			cUL 60950, cUL 508 and CSA 142, UL 1604 and CSA 213 Class 1 Division 2, C€, GL			
LED indicators			P1 and P2 power supplies, Ethernet link status, transmission activity			
Alarm relay			Activity, power supply fault, Ethernet network fault or communication port fault (1 A max. volt-free contact at 24 V ---)			
Reference			499 NMS 251 01	499 NMS 251 02	499 NSS 251 01	499 NSS 251 02

(1) Length dependent on the attenuation analysis and attenuation of the fiber optic (typical value: 2,000 m).

(2) Length dependent on the attenuation analysis and attenuation of the fiber optic (typical value: 15,000 m).

# Modicon M340

## automation platform

Ethernet TCP/IP network, Transparent Ready  
Cabling system: ConneXium managed switches

### Characteristics and references: 4 ports, twisted pair and fiber optic

Transparent Ready



Switches			Copper twisted pair and fiber optic, managed			
Interfaces	Copper cable ports	Number and type	3 x 10/100BASE-TX ports	2 x 10/100BASE-TX ports	3 x 10/100BASE-TX ports	2 x 10/100BASE-TX ports
		Shielded connectors	RJ45			
		Medium	Shielded twisted pair, category CAT 5E			
		Total length of pair	100 m			
	Fiber optic ports	Number and type	1 x 100BASE-FX port	2 x 100BASE-FX ports	1 x 100BASE-FX port	2 x 100BASE-FX ports
		Connectors	Duplex SC			
		Medium	Multimode optical fiber		Single mode optical fiber	
		Length of optical fiber				
		50/125 µm fiber	5,000 m (1)		–	
		62.2/125 µm fiber	4,000 m (1)		–	
		9/125 µm fiber	–		32,500 m (2)	
		Attenuation analysis				
		50/125 µm fiber	8 dB		–	
		62.2/125 µm fiber	11 dB		–	
		9/125 µm fiber	–		16 db	
		Ethernet services	FDR, SMTP V3, SNMP client, multicast filtering for optimization of the Global Data protocol, configuration via Web access VLAN, IGMP Snooping, RSTP ( <i>Rapid Scanning Tree Protocol</i> ), priority port, data stream control, secure port			
	Topology	Number of switches	Cascaded	Unlimited		
			Redundant in a ring	max. 50		
	Redundancy			Redundant power supplies, redundant single ring, ring coupling		
	Power supply	Voltage	Operation	9.6...60 V $\overline{\text{---}}$ /18...30 V $\sim$ , safety extra low voltage (SELV)		
Power consumption			6.5 W	7.3 W	6.5 W	7.3 W
Removable connector			6-way			
Operating temperature			0...+ 60 °C			
Relative humidity			10...90% non condensing			
Degree of protection			IP 20			
Dimensions		W x H x D	47 x 131 x 111 mm			
Mounting			On symmetrical DIN rail, 35 mm wide			
Weight			0.400 kg			
Conformity to standards			IEC 61131-2, IEC 61850-3, UL 508, UL 1604 Class 1 Division 2, CSA C22.2 14 (cUL), CSA C22.2 213 Class 1 Division 2 (cUL), C€, GL			
LED indicators			Power supply status, alarm relay status, active redundancy, redundancy management, copper port status and copper port activity			
Alarm relay			Power supply fault, Ethernet network fault, communication port fault, redundancy fault (1 A max. volt-free contact at 24 V $\overline{\text{---}}$ )			
Reference			TCS ESM 043F1CU0	TCS ESM 043F2CU0	TCS ESM 043F1CS0	TCS ESM 043F2CS0

(1) Length dependent on the attenuation analysis and attenuation of the fiber optic (typical value: 2,000 m).

(2) Length dependent on the attenuation analysis and attenuation of the fiber optic (typical value: 15,000 m).

# Modicon M340 automation platform

Ethernet TCP/IP network, Transparent Ready  
Cabling system: ConneXium managed switches

## Characteristics and references: 4 and 8 ports, twisted pair

Transparent Ready



Switches			Copper twisted pair, managed	
Interfaces	Copper cable ports	Number and type	4 x 10/100BASE-TX ports	8 x 10/100BASE-TX ports
		Shielded connectors	RJ45	
		Medium	Shielded twisted pair, category CAT 5E	
		Total length of pair	100 m	
	Fiber optic ports	Number and type	–	
		Connectors	–	
		Medium		
		Length of optical fiber		
		50/125 µm fiber	–	
		62.2/125 µm fiber	–	
		9/125 µm fiber	–	
		Attenuation analysis		
		50/125 µm fiber	–	
		62.2/125 µm fiber	–	
		9/125 µm fiber	–	
	Ethernet services		FDR, SMTP V3, SNMP client, multicast filtering for optimization of the Global Data protocol, configuration via Web access VLAN, IGMP Snooping, RSTP ( <i>Rapid Scanning Tree Protocol</i> ), priority port, data stream control, secure port	
Topology	Number of switches	Cascaded	Unlimited	
		Redundant in a ring	max. 50	
Redundancy			Redundant power supplies, redundant single ring, ring coupling	
Power supply	Voltage	Operation	9.6...60 V $\overline{\text{---}}$ /18...30 V $\sim$ , safety extra low voltage (SELV)	
	Power consumption		5.3 W	5.3 W
	Removable connector		6-way	
Operating temperature			0...+ 60 °C	
Relative humidity			10...90% non condensing	
Degree of protection			IP 20	
Dimensions		W x H x D	47 x 131 x 111 mm	74 x 131 x 111 mm
Mounting			On symmetrical DIN rail, 35 mm wide	
Weight			0.400 kg	0.410 kg
Conformity to standards			IEC 61131-2, IEC 61850-3, UL 508, UL 1604 Class 1 Division 2, CSA C22.2 14 (cUL), CSA C22.2 213 Class 1 Division 2 (cUL), C€, GL	
LED indicators			Power supply status, alarm relay status, active redundancy, redundancy management, copper port status and copper port activity	Power supply status, alarm relay status, active redundancy, redundancy management, fiber port status and fiber port activity
Alarm relay			Power supply fault, Ethernet network fault or communication port fault (1 A max. volt-free contact at 24 V $\overline{\text{---}}$ )	
Reference			TCS ESM 043F23F0	TCS ESM 083F23F0

# Modicon M340

## automation platform

Ethernet TCP/IP network, Transparent Ready  
Cabling system: ConneXium managed switches

### Characteristics and references: 8 ports, twisted pair and fiber optic

Transparent  
Ready



Switches			Copper twisted pair and fiber optic, managed					
Interfaces	Copper cable ports	Number and type	7 x 10/100BASE-TX ports	6 x 10/100BASE-TX ports	7 x 10/100BASE-TX ports	6 x 10/100BASE-T ports		
		Shielded connectors	RJ45					
		Medium	Shielded twisted pair, category CAT 5E					
		Total length of pair	100 m					
	Fiber optic ports	Number and type	1 x 100BASE-FX port	2 x 100BASE-FX ports	1 x 100BASE-FX port	2x 100BASE-FX ports	1 + 1 x 100BASE-FX port	
		Connectors	Duplex SC					
		Medium	Multimode optical fiber			Single mode optical fiber		Single mode optical fiber and multimode optical fiber
		Length of optical fiber						
		50/125 µm fiber	5,000 m (1)			–		5,000 m (1)
		62.2/125 µm fiber	4,000 m (1)			–		4,000 m (1)
		9/125 µm fiber	–			32,500 m (2)		32,500 m (2)
		Attenuation analysis						
		50/125 µm fiber	8 dB			–		8 dB
		62.2/125 µm fiber	11 dB			–		11 dB
		9/125 µm fiber	–			16 dB		16 dB
		Ethernet services	FDR, SMTP V3, SNMP client, multicast filtering for optimization of the Global Data protocol, configuration via Web access VLAN, IGMP Snooping, RSTP ( <i>Rapid Scanning Tree Protocol</i> ), priority port, data stream control, secure port					
Topology	Number of switches	Cascaded	Unlimited					
		Redundant in a ring	max. 50					
Redundancy			Redundant power supplies, redundant single ring, ring coupling					
Power supply	Voltage	Operation	9.6...60 V $\overline{\text{---}}$ /18...30 V $\sim$ , safety extra low voltage (SELV)					
	Power consumption		6.5 W	7.3 W	6.5 W	7.3 W		
	Removable connector		6-way					
Operating temperature			0...+ 60 °C					
Relative humidity			10... 90% non condensing					
Degree of protection			IP 20					
Dimensions		W x H x D	74 x 131 x 111 mm					
Mounting			On symmetrical DIN rail, 35 mm wide					
Weight			0.410 kg					
Conformity to standards			IEC 61131-2, IEC 61850-3, UL 508, UL 1604 Class 1 Division 2, CSA C22.2 14 (cUL), CSA C22.2 213 Class 1 Division 2 (cUL), CE, GL					
LED indicators			Power supply status, alarm relay status, active redundancy, redundancy management, fiber port status and fiber port activity					
Alarm relay			Power supply fault, Ethernet network fault or communication port fault (1 A max. volt-free contact at 24 V $\overline{\text{---}}$ )					
Reference			TCSESM 083F1CU0	TCSESM 083F2CU0	TCSESM 083F1CS0	TCSESM 083F2CS0	TCSESM 083F2CX0	

(1) Length dependent on the attenuation analysis and attenuation of the fiber optic (typical value: 2,000 m).

(2) Length dependent on the attenuation analysis and attenuation of the fiber optic (typical value: 15,000 m).



# Modicon M340 automation platform

Ethernet TCP/IP network, Transparent Ready  
Cabling system: ConneXium managed switches

## Characteristics and references: 16 and 24 ports, twisted pair, fiber optic

Transparent  
Ready

Switches			Copper twisted pair and fiber optic, managed	Copper twisted pair, managed	Copper twisted pair and fiber optic, managed	
Interfaces	Copper cable ports	Number and type	16 x 10/100BASE-TX ports	14 x 10/100BASE-TX ports	22 x 10/100BASE-TX ports	
		Shielded connectors	RJ45			
		Medium	Shielded twisted pair, category CAT 5E			
		Total length of pair	100 m			
	Fiber optic ports	Number and type	–	2 x 100BASE-FX ports		
		Connectors	–	Duplex SC		
		Medium	–	Multimode optical fiber		
		Length of optical fiber				
		50/125 µm fiber	–	5,000 m (1)		
		62.2/125 µm fiber	–	4,000 m (1)		
		9/125 µm fiber	–	–		
		Attenuation analysis				
		50/125 µm fiber	–	8 dB		
		62.2/125 µm fiber	–	11 dB		
		9/125 µm fiber	–	–		
	Ethernet services		FDR, SMTP V3, SNMP client, multicast filtering for optimization of the Global Data protocol, configuration via Web access VLAN, IGMP Snooping, RSTP ( <i>Rapid Scanning Tree Protocol</i> ), priority port, data stream control, secure port			
Topology	Number of switches	Cascaded	Unlimited			
		Redundant in a ring	max. 50			
Redundancy			Redundant power supplies, redundant single ring, ring coupling			
Power supply	Voltage	Operation	9.6...60 V $\overline{\text{---}}$ /18...30 V $\sim$ , safety extra low voltage (SELV)			
	Power consumption		9.4 W	11.8 W	15.5 W	
	Removable connector		6-way			
Operating temperature			0...+ 60 °C			
Relative humidity			10... 90% non condensing			
Degree of protection			IP 20			
Dimensions		W x H x D	111 x 131 x 111 mm			
Mounting			On symmetrical DIN rail, 35 mm wide			
Weight			0.600 kg		0.650 kg	
Conformity to standards			cUL 60950, UL 508 and CSA 142, UL 1604 and CSA 213 Class 1 Division 2, C€, GL			
LED indicators			Redundant power supplies, single ring	Redundant power supplies, single ring, double ring		
Alarm relay			Power supply fault, Ethernet network fault or communication port fault (1 A max. volt-free contact at 24 V $\overline{\text{---}}$ )			
Reference			TCSESM 163F2CU0	TCSESM 163F23F0	TCSESM 243F2CU0	

(1) Length dependent on the attenuation analysis and attenuation of the fiber optic (typical value: 2,000 m).

# Modicon M340

## automation platform

Ethernet TCP/IP network, Transparent Ready  
Cabling system: ConneXium managed switches

### Characteristics and references: 8 ports and 2 Gigabit ports, twisted pair, fiber optic

Transparent  
Ready

Switches			Copper twisted pair and fiber optic, managed			Copper twisted pair, managed
Interfaces	Copper cable ports	Number and type	8 x 10/100BASE-TX ports			8 x 10/100BASE-TX ports and 2 x 10/100/1000BASE-TX ports (Gigabit)
		Shielded connectors	RJ45			
		Medium	Shielded twisted pair, category CAT 5E			
		Total length of pair	100 m			
	Gigabit ports fiber optic (with SFP fiber module to be mounted on SFP connector)	Number and type	2 x 1000BASE-SX ports (1)	2 x 1000BASE-LH ports (2)	2 x 1000BASE-LX ports (3)	–
		Connectors	LC			–
		Medium	Multimode optical fiber	Single mode optical fiber	Single mode and multimode optical fiber	–
		Length of optical fiber				
		50/125 µm fiber	550 m	–	550 m	–
		62.2/125 µm fiber	275 m	–	550 m	–
		9/125 µm fiber	–	8 - 72,000 m	20,000 m	–
		Attenuation analysis				
		50/125 µm fiber	7.5 dB	–	11 dB	–
		62.2/125 µm fiber	7.5 dB	–	11 dB	–
		9/125 µm fiber	–	6 - 22 dB	11 dB	–
	Ethernet services	FDR, SMTP V3, SNMP client, multicast filtering for optimization of the Global Data protocol, configuration via Web access VLAN, IGMP Snooping, RSTP ( <i>Rapid Scanning Tree Protocol</i> ), priority port, data stream control, secure port				
Topology	Number of switches	Cascaded	Unlimited			
		Redundant in a ring	max. 50			
Redundancy			Redundant power supplies, redundant single ring, ring coupling			
Power supply	Voltage	Operation	9.6...60 V $\overline{\text{---}}$ /18...30 V $\sim$ , safety extra low voltage (SELV)			
	Power consumption		8.9 W + 1 W per SFP fiber module			8.3 W
	Removable connector		6-way			
Operating temperature			0...+ 60 °C			
Relative humidity			10... 90% non condensing			
Degree of protection			IP 20			
Dimensions		W x H x D	111 x 131 x 111 mm			
Mounting			On symmetrical DIN rail, 35 mm wide			
Weight			0.410 kg			
Conformity to standards			cUL 60950, UL 508 and CSA 142, UL 1604 and CSA 213 Class 1 Division 2, C€, GL			
LED indicators			Power supply status, alarm relay status, active redundancy, redundancy management, fiber port status and fiber port activity			
Alarm relay			Power supply fault, Ethernet network fault or communication port fault (1 A max. volt-free contact at 24 V $\overline{\text{---}}$ )			
Reference			TCS ESM 103F2LG0			TCS ESM 103F23G0

(1) With TCS EAA F1LFU00 fiber optic module to be ordered separately, see page 3/35.

(2) With TCS EAA F1LFH00 fiber optic module to be ordered separately, see page 3/35.

(3) With TCS EAA F1LFS00 fiber optic module to be ordered separately, see page 3/35.

# Modicon M340 automation platform

Ethernet TCP/IP network, Transparent Ready  
Cabling system: ConneXium IP 67 switch

## Characteristics and references: IP 67 unmanaged switch



IP 67 switch			Twisted pair, unmanaged
Interfaces	Copper cable ports	Number and type	5 x 10BASE-T/100BASE-TX ports
		Shielded connectors	M12 (type D)
		Medium	Shielded twisted pair, category CAT 5E
		Total length of pair	100 m
	Fiber optic ports	Number and type	–
		Connectors	–
		Medium	–
		Length of optical fiber	–
		Attenuation analysis	–
	Ethernet services		Storage and re-routing of received data, auto MDI/MDX (automatic switching depending on whether cables are straight or crossed), automatic negotiation of 10/100 Mbps and duplex mode (on all ports), automatic change of polarity
Topology	Number of switches	Cascaded	Unlimited
		Redundant in a ring	–
Redundancy			–
Power supply	Voltage		24 V $\pm$ (18...32 V $\pm$ ), safety extra low voltage (SELV)
	Power consumption		100 mA
	Connector		5-way M12 (type A, male)
Operating temperature			0...+ 60°C
Relative humidity			–
Degree of protection			IP 67
Dimensions W x H x D			60 x 126 x 31 mm
Weight			0.210 kg
Conformity to standards			cUL 508 and CSA 22.2 14
LED indicators			Power supply, line status, line activity
Alarm relay			–
Reference			TCS ESU 051 F0

IP 67 cordsets				
Ethernet cordsets		Preformed at each end, see page 3/35		
Power supply cables		Preformed at each end with M12 female straight connectors		Preformed at each end with female M12 angled connectors
Length		2 m	5 m	2.5 m 5 m
Reference		XZC P1164L2	XZC P1164L5	XZC P1264L2 XZC P1264L5
Spare power connectors		Female M12 straight connector		Female M12 angled connector
Reference		XZC C12 FDM 50B		XZC C12 FCM 50B

# Modicon M340 automation platform

Ethernet TCP/IP network, Transparent Ready  
Cabling system: Connexium connection components

## Shielded copper connection cables

ConneXium shielded connection cables are available in two versions to meet the various current standards and approvals:

■ EIA/TIA 568 standard shielded twisted pair cables

These cables conform to:

- EIA/TIA-568 standard, category CAT 5E,
- IEC 11801/EN 50173 standard, class D.

Their fire resistance conforms to:

- NFC 32070# C2 classification
- IEC 322/1 standards
- Low Smoke Zero Halogen (LSZH).

■ UL and CSA 22.1 approved shielded twisted pair cables

These cables conform to:

- UL and CSA 22.1 standards
- Their fire resistance conforms to NFPA 70.

## EIA/TIA 568 standard shielded twisted pair cables

Description	Preformed at both ends	Length	Reference	Weight kg
Straight cables	2 RJ45 connectors For connection to terminal devices (DTE)	2 m	490 NTW 000 02	—
		5 m	490 NTW 000 05	—
		12 m	490 NTW 000 12	—
		40 m	490 NTW 000 40	—
		80 m	490 NTW 000 80	—
Crossed cord cables	2 RJ45 connectors For connections between hubs, switches and transceivers	5 m	490 NTC 000 05	—
		15 m	490 NTC 000 15	—
		40 m	490 NTC 000 40	—
		80 m	490 NTC 000 80	—

## UL and CSA 22.1 approved shielded twisted pair cables

Description	Preformed at both ends	Length	Reference	Weight kg
Straight cables	2 RJ45 connectors For connection to terminal devices (DTE)	2 m	490 NTW 000 02U	—
		5 m	490 NTW 000 05U	—
		12 m	490 NTW 000 12U	—
		40 m	490 NTW 000 40U	—
		80 m	490 NTW 000 80U	—
Shielded cables	2 RJ45 connectors For connections between hubs, switches and transceivers	5 m	490 NTC 000 05U	—
		15 m	490 NTC 000 15U	—
		40 m	490 NTC 000 40U	—
		80 m	490 NTC 000 80U	—

## Glass fiber optic cables

These glass fiber optics are for making connections:

- To a terminal device (DTE)
- Between hubs, transceivers and switches

Description	Preformed at both ends	Length	Reference	Weight kg
Glass fiber optic cables	1 SC connector 1 MT-RJ connector	5 m	490 NOC 000 05	—
	1 ST connector (BFOC) 1 MT-RJ connector	5 m	490 NOT 000 05	—
	2 MT-RJ connectors	3 m	490 NOR 000 03	—
		5 m	490 NOR 000 05	—
		15 m	490 NOR 000 15	—

3

3.1



490 NTW 000 05



490 NOC 000 05



490 NOT 000 05



490 NOR 000 05

# Modicon M340 automation platform

Ethernet TCP/IP network, Transparent Ready  
Cabling system: ConneXium connection components



TCS EAA F1LF●00

## Separate parts for TCS ESM switches

Description	Optical fiber	Type	Reference	Weight kg
<b>Fiber optic modules for Gigabit ports with LC connector</b> (1)	Multimode 50/125µm or 62.5/125µm	1000BASE-SX	<b>TCS EAA F1LFU00</b>	0.040
	Single mode 9/125µm	1000BASE-LH	<b>TCS EAA F1LFH00</b>	0.040
	Multimode 50/125µm or 62.5/125µm Single mode 62.5/125µm	1000BASE-LX	<b>TCS EAA F1LFS00</b>	0.040
<b>Configuration backup key</b>	Via the USB port on the front of the switch, used to: - save and retrieve the switch configuration - update the internal software		<b>TCS EAM 0100</b>	—

## Connection components for IP 67 switch

Description	Preformed at both ends	Length	Reference	Weight kg
<b>Copper cables</b>	1 IP 67 4-way M12 connector and 1 RJ45 connector	1 m	<b>TCS ECL 1M3M 1S2</b>	—
		1.5 m	<b>TCS ECL 1M3M 1X5S2</b>	—
		3 m	<b>TCS ECL 1M3M 3S2</b>	—
		5 m	<b>TCS ECL 1M3M 5S2</b>	—
		10 m	<b>TCS ECL 1M3M 10S2</b>	—
		25 m	<b>TCS ECL 1M3M 25S2</b>	—
		40 m	<b>TCS ECL 1M3M 40S2</b>	—
	2 IP 67 4-way M12 connectors	1 m	<b>TCS ECL 1M1M 1S2</b>	—
		1.5 m	<b>TCS ECL 1M1M 1X5S2</b>	—
		3 m	<b>TCS ECL 1M1M 3S2</b>	—
		5 m	<b>TCS ECL 1M1M 5S2</b>	—
		10 m	<b>TCS ECL 1M1M 10S2</b>	—
		25 m	<b>TCS ECL 1M1M 25S2</b>	—
		40 m	<b>TCS ECL 1M1M 40S2</b>	—
<b>M12/RJ45 adaptor</b>	IP 67 female 4-way M12 connector and female RJ45 connector	—	<b>TCS EAA F11F13F00</b>	—

(1) Dimensions W x H x D = 20 x 18 x 50 mm.

# Modicon M340 automation platform

## CANopen machine and installation bus

### Presentation

Schneider Electric has selected CANopen for its machines and installations because of its wealth of functions and its resulting benefits in the automation world. This decision was based on the general acceptance of CANopen, and the fact that CANopen products are increasingly used in control system architectures.

CANopen is an open network supported by more than 400 companies worldwide, and promoted by CAN in Automation. CANopen conforms to standards EN 50325-4 and ISO 15745-2.


Schneider Electric is heavily involved in working groups, which are important for machine and installation architectures, systems and products.

### CANopen brings transparency to Ethernet

CAN in Automation and Modbus-IDA have worked together to create a standard that ensures total transparency between CANopen and Modbus TCP/IP. The result of this collaboration has been the CiA DSP309-2 specification, defining communication standards between a Modbus TCP/IP network and a CANopen bus.

The specification defines mapping services enabling CANopen devices to communicate with a Modbus TCP/IP network through a gateway. The data in a CANopen device can be accessed in both read and write mode.

This specification is the first standard available for developing an open standard communication between Modbus TCP/IP and CANopen. It is driving Schneider Electric network solutions toward better integration, diagnostics and configuration of distributed applications. It allows machines and installations to be connected to an Ethernet network continuously, while combining the advantages of each network in its specific area.

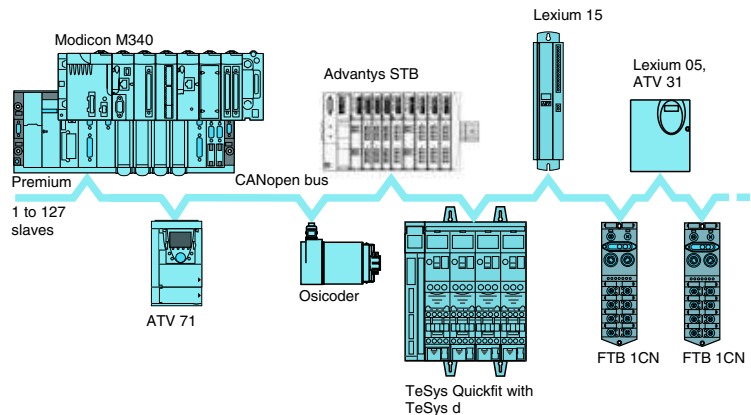

The CANopen bus is a multi-master bus ensuring reliable, deterministic access to real-time data in control system devices. The CSMA/CA protocol is based on broadcast exchanges, sent cyclically or on an event, to ensure optimum use of the passband. A message handling channel can also be used to define slave parameters.

The bus uses a double twisted pair on which, with the Modicon M340 platform, 63 devices maximum are connected by daisy-chaining or by tap junctions. The variable data rate between 20 Kbit/s and 1 Mbit/s depends on the length of the bus (between 20 m and 2,500 m).

Each end of the bus must be fitted with a line terminator.

The CANopen bus is a set of profiles on CAN systems, possessing the following characteristics:

- Open bus system
- Data exchanges in real time without overloading the protocol
- Modular design allowing modification of size
- Interconnection and interchangeability of devices
- Standardized configuration of networks
- Access to all device parameters
- Synchronization and circulation of data from cyclic and/or event-controlled processes (short system response time)

# Modicon M340 automation platform

## CANopen machine and installation bus



Advantys FTB



Advantys OTB



TeSys Quickfit



Altivar ATV 31

Example of devices that can be connected on CANopen

### Connectable devices

The Modicon M340 automation platform, via its **BMX P34 2010/2030** processors with integrated CANopen link, performs the role of master on the machine bus.

The following Telemecanique devices can be connected to the CANopen bus:

- Ø 58 mm Osicoder multi-turn absolute encoders:
  - **XCC 3510P/3515C S84CB**, version ≥ 1.0
- TeSys U starter-controllers:
  - with **LUL C08** communication module, version ≥ 1.2
- TeSys d motor-starters, using the TeSys Quickfit installation help system:
  - with **APP 1CC00/O2** communication module, version ≥ 1.0
- Advantys OTB IP 20 Optimum distributed I/O (I/O extension modules not permitted):
  - with **OTB 1C0 DM9LP** interface module, version ≥ 2.0
- Advantys STB IP 20 modular distributed I/O:
  - with NIM module **STB NCO 1010**, version ≥ 1.0 or **STB NCO 2212**, version ≥ 2.02
- Advantys FTB IP 67 monobloc I/O splitter boxes:
  - **FTB 1CN●●●●●**, version ≥ 1.7
- Preventa configurable safety controllers:
  - **XPS MC16ZC/32ZC**, version ≥ 1.10
- Altivar 31 variable speed drives for asynchronous motors 0.18...15 kW:
  - **ATV 31H ●●●●●**, version ≥ 1.1 (1)
- Altivar 71/61 variable speed drives for asynchronous motors 0.75...630 kW:
  - **ATV 61H /71H ●●●●●**, version ≥ 1.1 (1)
- Lexium 05 servo drives (0.4...6 kW) for BSH servo motors:
  - **LXM 05A●D●●●●**, version ≥ 1.120 (2)
- Lexium 15 servo drives (0.9...42.5 kW) for BDH or BSH servo motors:
  - **LXM 15L●**, version ≥ 1.45 (3)
  - **LXM 15MD/15HC**, version ≥ 6.64 (4)
- Iclat intelligent compact motor-drives from Berger Lahr (compagny of Schneider Electric group):
  - **IFA 6●**, version ≥ 1.105 (5)
  - **IFE 71**, version ≥ 1.104 (5)
  - **IFS 6●/9●**, version ≥ 1.107 (5)


(1) Requires the PowerSuite software workshop **VW3 A8 104**, version ≥ 2.00.

(2) Requires the PowerSuite software workshop for Lexium 05 **VW3 A8 104**, version 2.2.0 patch V2.2.0B.

(3) Requires the Unilink software, version ≥ 1.5.

(4) Requires the Unilink software, version ≥ 4.0.

(5) Requires the Iclat Easy software, version ≥ 1.104.

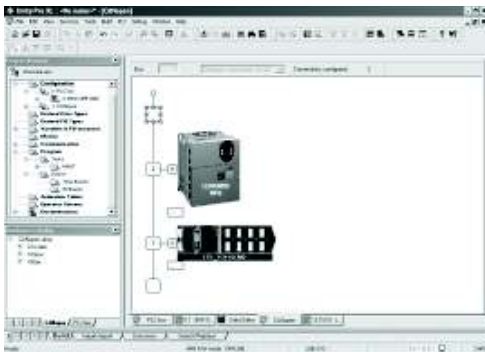

Example of Unity Pro configuration screen for Lexium 05 servo drive and Advantys FTB IP 67 I/O splitter box

### Software setup via Unity Pro

Configuration of the CANopen bus on the Modicon M340 platform is fully integrated in the Unity Pro software. From the Unity Pro graphic editor, simply select the devices available in the catalog and assign them their CANopen slave address. Exchanges between the CANopen bus and the Modicon M340 processor can be assigned by configuration to the fast or master task.

Predefined profiles or functions are used to create the user interface automatically using process variables (PDO), in such a way that any subsequent modification to the mapping of these variables will have no impact on their topological addressing. Depending on the devices, dedicated configuration screens are used to assign the initial parameters.

The dedicated screens are available for CANopen specialists who wish to optimize the performance of the CANopen bus or re-assign the Process Data Objects (PDO) differently.


Acyclical access to the Service Data Object (SDO) corresponding to any CANopen object of a particular device is easily possible from the application using the standard communication functions **READ\_VAR** and **WRITE\_VAR**, or even from the Unity Pro diagnostic screens.

These screens can be used to display the bus status graphically, as well as to access the diagnostics sent by a faulty device with a single click of the mouse.



# Modicon M340 automation platform

## CANopen machine and installation bus

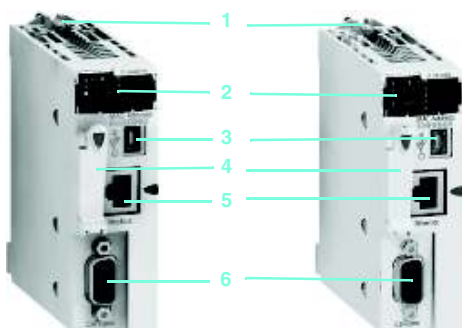

BMX P34 2010

BMX P34 2030

### Description

Both of the Performance processors on the Modicon M340 platform, **BMX P34 2010** and **BMX P34 2030**, have an integrated CANopen communication port. They have the following on the front panel:

- 1 Safety screw for locking the module in its slot (marked 0) in the rack
- 2 A display block comprising at least:
  - CAN RUN LED (green): Integrated machine/installation bus operational
  - CAN ERR LED (red): Integrated machine/installation bus faulty
- 3 A mini B USB connector for a programming terminal
- 4 A slot equipped with Flash memory card for backing up the application
- 5 An RJ45 connector for serial link (with **BMX P34 2010** model) or Ethernet TCP/IP port (with **BMX P34 2030** model)
- 6 A 9-way SUB-D connector for the CANopen Master machine and installation bus

### Characteristics (1)

Type of bus			CANopen							
CANopen services	Conformity class		M20							
	Standard		DS 301 V 04.02, 303-2							
	Device profile		DS 405							
	Special		–							
Structure	Physical interface		9-way male SUB-D							
	Topology		Devices connected by daisy-chaining and/or tap junctions							
	Access method		CSMA/CA, carrier sense consumer/producer principle, collision detection and arbitration of message priorities							
	Application layer		Messages carrying objects: process data (PDO), service data (SDO), network management (NMT), special functions (SYNC, EMCY, TIME)							
Transmission	Data rate		20 Kbit/s...1 Mbit/s depending on bus length							
	Medium		Double shielded twisted pair							
CANopen physical configuration (1)	No. of slave devices		63 maximum							
	Data rate		1 Mbit/s	800 Kbit/s	500 Kbit/s	250 Kbit/s	125 Kbit/s	50 Kbit/s	20 Kbit/s	
	Maximum length of bus (2)		m	20	40	100	250	500	1000	2500
	Maximum length of tap-offs on one tap junction (3)		m	0.6	6	10	10	10	120	300
	Limitation per segment	No. of devices		64	32	16				
		Maximum length of segment (4)	m	160	185	205				
Modicon M340 processor			BMX P34 2010				BMX P34 2030			
No. of racks			1 (4, 6, 8 or 12 slots)							
Maximum no. of slots			12 for processor and modules (excluding power supply module)							
Maximum no. in rack	Discrete I/O		1,024, 704 in single-rack configuration (64 I/O x 11)							
	Analog I/O		256, 66 in single-rack configuration (4I/2Q x 11)							
	Process control		Programmable loops (via CONT-CTL process control EFB library)							
	Counting		36 channels							
	Motion		Independent axes on CANopen bus (via MFB library)							
Integrated connections	Ethernet TCP/IP		–				1 RJ45 port, 10/100 Mbit/s			
	CANopen bus		1 master (9-way SUB-D)							
	Serial link		1 RJ45 port, Modbus master/slave or character mode –							
	USB port		1 port, 12 Mbit/s							
Communication module	Ethernet TCP/IP		1 RJ45 port, 10/100 Mbit/s with Transparent Ready : - class B30 standard Web server with BMX NOE 0100 module - class C30 configurable Web server with BMX NOE 0110 module							
Internal RAM capacity			Kb	4,096 including 3,584 for the program, constants and symbols and 256 for data						

(1) For more information, please refer to the "Machines and installations with industrial communication" catalogue.

(2) Deduct 15 m per repeater from the length of the bus.

(3) For other restrictions, please refer to the CANopen hardware setup manual available on our website ([www.telemecanique.com](http://www.telemecanique.com)).

(4) With the use of **TSX CAN C●50/100/300** CANopen cables and **TSX CAN C●DD03/1/3/5** preformed cordsets.



# Modicon M340 automation platform

## CANopen machine and installation bus

### Modicon M340 Performance processors with integrated CANopen bus link



BMX P34 2010



BMX P34 2030

Modicon M340 processor modules are supplied with the **BMX RMS 008MP** Flash memory card. This card performs the following actions transparently:


- Backing up the application (program, symbols and constants) supported in the processor internal RAM that is not backed up
- Activation of the Transparent Ready class B10 standard web server (with **BMX P34 2030** processor)

This card can be replaced by another card featuring a file storage option (see page 1/9).

I/O capacity (1)	Memory capacity	Max. no. of network modules	Integrated communication ports	Reference (3)	Weight kg
<b>Performance BMX P340 20, 1 rack</b>					
1,024 discrete I/O 256 analog I/O 36 app-sp. channels	4,096 Kb integrated	1 Ethernet TCP/IP network	CANopen bus Modbus serial link	<b>BMX P34 2010</b>	—
			CANopen bus Ethernet TCP/IP network	<b>BMX P34 2030</b>	—

(1) For I/O capacity in single-rack configuration, see characteristics, page 1/8

### CANopen bus wiring system

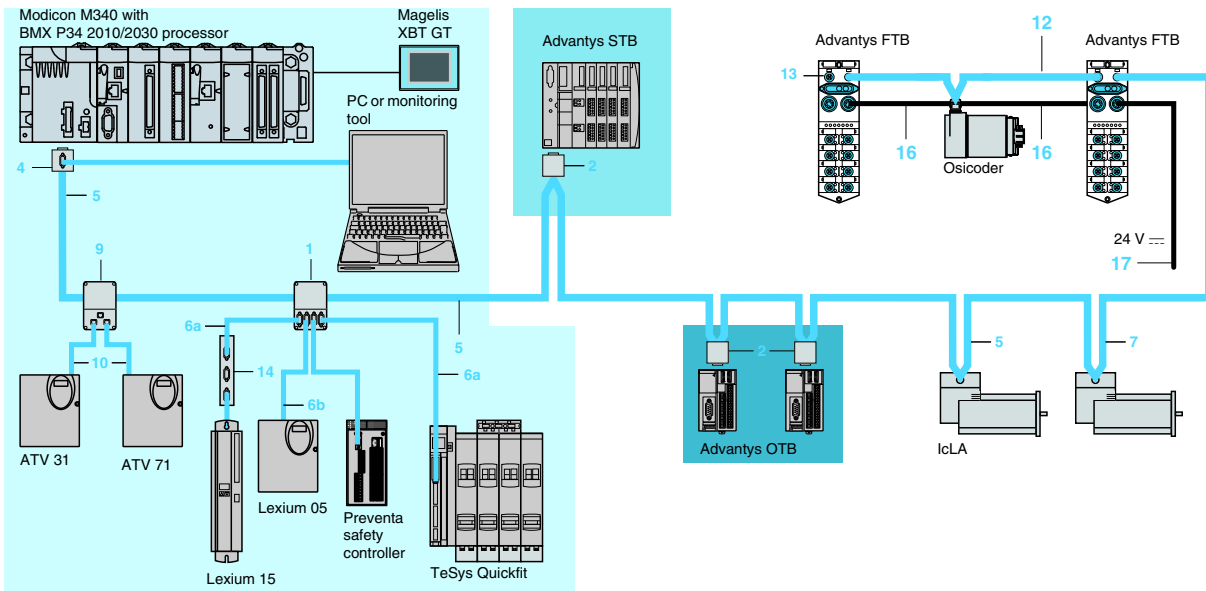

**Note:** For numbers and references 1, 2, ..., 17, see pages 3/40 and 3/41.

Different types of cable are available making it possible to create any type of application, including for harsh environments (for a definition of standard and harsh environments, see page 3/40).

Several connectors are available to meet any requirement: straight or 90° angled connectors, or angled connectors with the option of connecting a PC or diagnostic pocket PC.

Power can be supplied to the equipment by means of cables, cordsets and tap junctions: one AWG24 pair for the CAN signals, one AWG22 pair for the power supply and the ground.

In addition to the IP 20 wiring offer, there is also an IP 67 wiring offer.

# Modicon M340

## automation platform

### CANopen machine and installation bus

### Wiring system



TSX CAN TDM4



VW3 CAN TAP2



TSX CAN KCD F90T



TSX CAN KCD F180T



TSX CAN KCD F90TP

#### Standard tap junctions and connectors

Designation	Description	No. (1)	Length	Reference	Weight kg
<b>IP 20 CANopen tap junction</b>	4 SUB-D ports. Screw terminal block for connection of trunk cables Line termination	1	—	TSX CAN TDM4	0.196
<b>IP 20 connectors</b> CANopen female 9-way SUB-D. Switch for line termination	90° angled	2	—	TSX CAN KCDF 90T	0.046
	Straight (2)	—	—	TSX CAN KCDF 180T	0.049
	90° angled with 9-way SUB-D for connecting a PC or diagnostic tool	4	—	TSX CAN KCDF 90TP	0.051
<b>IP 67 M12 connectors</b>	Male	—	—	FTX CN 12M5	0.050
	Female	—	—	FTX CN 12F5	0.050
<b>IP 20 CANopen tap junctions for Altivar and Lexium 05</b>	2 RJ45 ports	9	—	VW3 CAN TAP2	—

#### IP 20 standard cables and preformed cordsets

Designation	Description	No. (1)	Length	Unit reference	Weight kg
<b>CANopen cables</b> (AWG 24)	Standard, C€ marking: low smoke. Halogen-free. Flame-retardant (IEC 60332-1)	5	50 m	TSX CAN CA50	4.930
			100 m	TSX CAN CA100	8.800
			300 m	TSX CAN CA300	24.560
	Standard, UL certification, C€ marking: flame-retardant (IEC 60332-2)	5	50 m	TSX CAN CB50	3.580
			100 m	TSX CAN CB100	7.840
			300 m	TSX CAN CB300	21.870
	For harsh environments (3) or mobile installation, C€ marking: low smoke. Halogen-free. Flame-retardant (IEC 60332-1). Resistance to oils	5	50 m	TSX CAN CD50	3.510
			100 m	TSX CAN CD100	7.770
			300 m	TSX CAN CD300	21.700
<b>CANopen preformed cordsets</b> One 9-way female SUB-D connector at each end (AWG 24)	Standard, C€ marking: low smoke. Halogen-free. Flame-retardant (IEC 60332-1)	6a	0.3 m	TSX CAN CADD03	0.091
			1 m	TSX CAN CADD1	0.143
			3 m	TSX CAN CADD3	0.295
			5 m	TSX CAN CADD5	0.440
	Standard, UL certification, C€ marking: flame-retardant (IEC 60332-2)	6a	0.3 m	TSX CAN CBDD03	0.086
			1 m	TSX CAN CBDD1	0.131
			3 m	TSX CAN CBDD3	0.268
			5 m	TSX CAN CBDD5	0.400
<b>CANopen preformed cordsets</b> One 9-way SUB-D connector, One RJ45 connector (AWG 24)	Standard, C€ marking: low smoke. Halogen-free. Flame-retardant (IEC 60332-1)	6b	0.5 m	TCS CCE 4F3M05	—
			1 m	TCS CCE 4F3M1	—
	Standard, UL certification, C€ marking: flame-retardant (IEC 60332-2)	6b	0.5 m	TCS CCU4F3M05	—
			1 m	TCS CCU 4F3M1	—
<b>CANopen preformed cordsets</b>	Two 9-way SUB-D connectors, one male and one female	—	0.5 m	TLA CD CBA 005	—
			1.5 m	TLA CD CBA 015	—
			3 m	TLA CD CBA 030	—
			5 m	TLA CD CBA 050	—

#### IP 67 standard preformed cordsets

Designation	Description	No. (1)	Length	Unit reference	Weight kg
<b>CANopen preformed cordsets</b>	Preformed cordsets of two 5-way M12 A-coded angled connectors (one male connector and one female connector)	12	0.3 m	FTX CN 3203	0.40
			0.6 m	FTX CN 3206	0.70
			1 m	FTX CN 3210	0.100
			2 m	FTX CN 3220	0.160
			3 m	FTX CN 3230	0.220
			5 m	FTX CN 3250	0.430
	Preformed cordsets with one 5-way female M12 A-coded connector at one end and flying leads at the other end	7	3 m	FTX CN 3130	—
			5 m	FTX CN 3150	—

(1) For numbers, see page 3/39.

(2) For connection to Controller Inside programmable card, the VW3 CAN KCDF 180T connector can also be used.

(3) **Standard environment:**

- Without any particular environmental constraints
- Operating temperature between +5°C and +60°C
- Fixed installation

**Harsh environment:**

- Resistance to hydrocarbons, industrial oils, detergents, solder splashes
- Relative humidity up to 100%
- Saline atmosphere
- Significant temperature variations
- Operating temperature between -10°C and +70°C
- Mobile installation

# Modicon M340

## automation platform

### CANopen machine and installation bus

### Wiring system




VW3 CAN A71




AM0 2CA 001V000



FTX DP21



XZ CC12DM50B



XZ CC12CM50B



FTX CY1208

#### IP 20 connection accessories

Designation	Description	No. (1)	Length	Unit reference	Weight kg
<b>CANopen connector</b> for Altivar 71 drive (2)	9-way female SUB-D. Switch for line termination. Cables exit at 180°	—	—	<b>VW3 CAN KCDF 180T</b>	—
<b>Adaptor</b> for Altivar 71 drive	CANopen adaptor SUB-D to RJ45	—	—	<b>VW3 CAN A71</b>	—
<b>Preformed CANopen cordsets</b> for Altivar and Lexium 05 drives	One RJ45 connector at each end	10	0.3 m	<b>VW3 CAN CARR03</b>	—
			1 m	<b>VW3 CAN CARR1</b>	—
<b>CANopen bus adaptor</b> for Lexium 15 servo drive	Hardware interface for a link conforming to the CANopen standard + one connector for a PC terminal	14	—	<b>AM0 2CA 001V000</b>	0.110
<b>Y-connector</b>	CANopen/Modbus	—	—	<b>TCS CTN011M11F</b>	—

#### IP 67 connection accessories

##### For Advantys FTB monobloc I/O splitter boxes

Designation	Composition	No. (1)	Length m	Reference	Weight kg
<b>IP 67 line terminator</b>	Equipped with one M12 connector (for end of bus)	13	—	<b>FTX CNTL12</b>	0.010
<b>24 V power supply connection cables</b>	Equipped with two 5-way 7/8 connectors	16	0.6	<b>FTX DP2206</b>	0.150
			1	<b>FTX DP2210</b>	0.190
			2	<b>FTX DP2220</b>	0.310
			5	<b>FTX DP2250</b>	0.750
			—	—	—
	Equipped with one 5-way 7/8 connector at one end and flying leads at the other end	17	1.5	<b>FTX DP2115</b>	0.240
			3	<b>FTX DP2130</b>	0.430
			5	<b>FTX DP2150</b>	0.700
			—	—	—
			—	—	—
<b>T-junction box for power supply</b>	Equipped with two 5-way 7/8 connectors	—	—	<b>FTX CNCT1</b>	0.100


##### Separate parts

Designation	Composition	Sold in	Reference	Weight kg
<b>Connectors</b>	7/8 type, 5-way	Male	<b>FTX C78M5</b>	0.050
		Female	<b>FTX C78F5</b>	0.050
	Straight, M12 type, 5 screw terminals	Male	<b>XZ CC12MDM50B</b>	0.020
		Female	<b>XZ CC12FDM50B</b>	0.020
	Angled, M12 type, 5 screw terminals	Male	<b>XZ CC12MCM50B</b>	0.020
		Female	<b>XZ CC12FCM50B</b>	0.020
<b>Sealing plugs</b>	For M8 connector (sold in packs of 10)	—	<b>FTX CM08B</b>	0.100
	For M12 connector (sold in packs of 10)	—	<b>FTX CM12B</b>	0.100
	For 7/8 connector	—	<b>FTX C78B</b>	0.020
<b>Y-connector</b>	Connection of two M8 connectors to M12 connector on splitter box	—	<b>FTX CY1208</b>	0.020
	Connection of two M12 connectors to M12 connector on splitter box	—	<b>FTX CY1212</b>	0.030
<b>Diagnostics adaptor</b>	Equipped with two M12 connectors	—	<b>FTX DG12</b>	0.020
<b>Marker labels</b>	For plastic splitter boxes	Packs of 10	<b>FTX BLA10</b>	0.010
	For metal splitter boxes	Packs of 10	<b>FTX MLA10</b>	0.010

(1) For numbers, see page 3/39.

(2) For ATV 71H...M3, ATV 71HD11M3X, HD15M3X, ATV 71H075N4... HD18N4 drives, this connector can be replaced by the **TSX CAN KCDF 180T** connector.

### Presentation

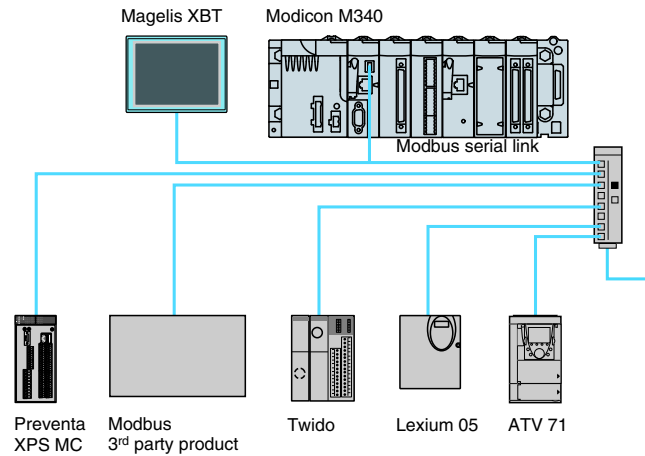

The Modbus bus is used for master/slave architectures (it is necessary, however, to check that the Modbus services used by the application are implemented on the devices concerned).

The bus comprises one master station and several slave stations. Only the master station can initiate the exchange (direct communication between slave stations is not possible). Two exchange mechanisms are possible:

- Question/answer, where the requests from the master are addressed to a given slave. The master then waits for the response from the slave which has been interrogated.
- Broadcasting, the master broadcasts a message to all the slave stations on the bus. These stations execute the order without transmitting a response.


### Description

The **BMX P34 1000 / 2010 / 2020** processors in the Modicon M340 automation platform range integrate a serial link that can operate under Modbus master/slave RTU/ASCII protocol or under character mode protocol.


For this serial port, these processors have the following on the front panel :

- 1 A display block comprising among other LEDs:
  - SER COM LED (yellow): Activity on the Modbus serial link (lit) or failure on an equipment present on the link (flashing).
- 2 An RJ45 connector for the Modbus serial link or character mode link (RS 232C/RS 485, non-isolated) and its black indicator 3.

**Nota :** Complete processors descriptions, see page 1/5.



BMX P34 1000

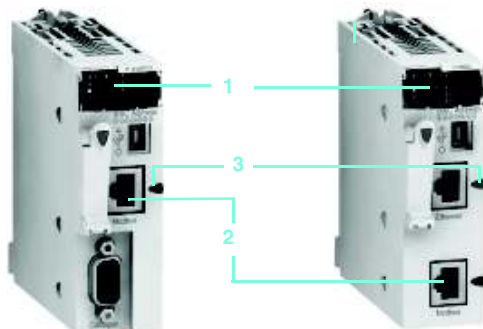

BMX P34 2010



BMX P34 2000

Characteristics					
Protocol		Modbus		Character mode	
Structure	Type	Non isolated serial link (1)			
	Method of access	Master/slave type		–	
	Physical Interface	RS 232, 2 wires	RS 485, 2 wires	RS 232, 4 wires	RS 485, 2 wires
Transmission	Mode	Asynchronous in baseband		Asynchronous in baseband	
	Frame	RTU/ASCII, Half duplex		Full duplex	Half duplex
	Data rate	0.3...19.2 Kbit/s (default 19.2 Kbit/s)		0.3...19.2 Kbit/s (default 19.2 Kbit/s)	
	Medium	Shielded twisted pair		Simple or double shielded twisted pair	Shielded twisted pair
Configuration	Number of devices	2 (point-to-point)	32 max. per segment	2 (point-to-point)	32 max. per segment
	Maximum number of link addresses	248		248	
	Maximum length of bus	15 m	10 m non isolated link 1000 m isolated link	15 m	10 m non isolated link 1000 m isolated link
	Maximum length of tap links	–	15 m non isolated link 40 m isolated link	–	15 m non isolated link 40 m isolated link
Services	Requests	252 data bytes per RTU request 504 data bytes per ASCII request		1 K data bytes per request	
	Security, control parameters	One CRC on each frame (RTU) One LRC on each frame (ASCII)		One LRC on each frame (ASCII)	
	Monitoring	Diagnostic counters, event counters		–	

(1) For an isolated link, you must use the TWD XCA ISO terminal port cable connector.

Modbus functions			
Modbus functions available on serial ports integrated to Modicon M340 processors	Code	Modbus slave (server)	Modbus master (client)
	01	Read n output bits	Read output bits
	02	Read n input bits	Read input bits
	03	Read n output words	Read words
	04	Read n input words	Read input words
	15	Write n output bits	Write n output bits
	16	Write n output words	Write n output words

## References

		I/O capacity (1)	Memory capacity	Integrated communication ports	Reference (3)	Masse kg
 		<b>Standard processor with integrated serial link BMX P340 10</b>				
		512 discrete I/O 128 E/S analog I/O 20 application-specific channels	2,048 Kb integrated	Modbus serial link	<b>BMX P34 1000</b>	0.200
		<b>Performance processors with integrated serial link BMX P340 20</b>				
		1024 discrete I/O 256 E/S analog I/O 36 application-specific channels	4,096 Kb integrated	Modbus serial link CANopen bus	<b>BMX P34 2010</b>	0.210
				Modbus serial link Ethernet TCP/IP network	<b>BMX P34 2020</b>	0.205

BMX P34 1000

BMX P34 2020

Serial link cabling system, see pages 3/44 and 3/45.


# Modicon M340

## automation platform

Modbus serial link and character mode  
Cabling system





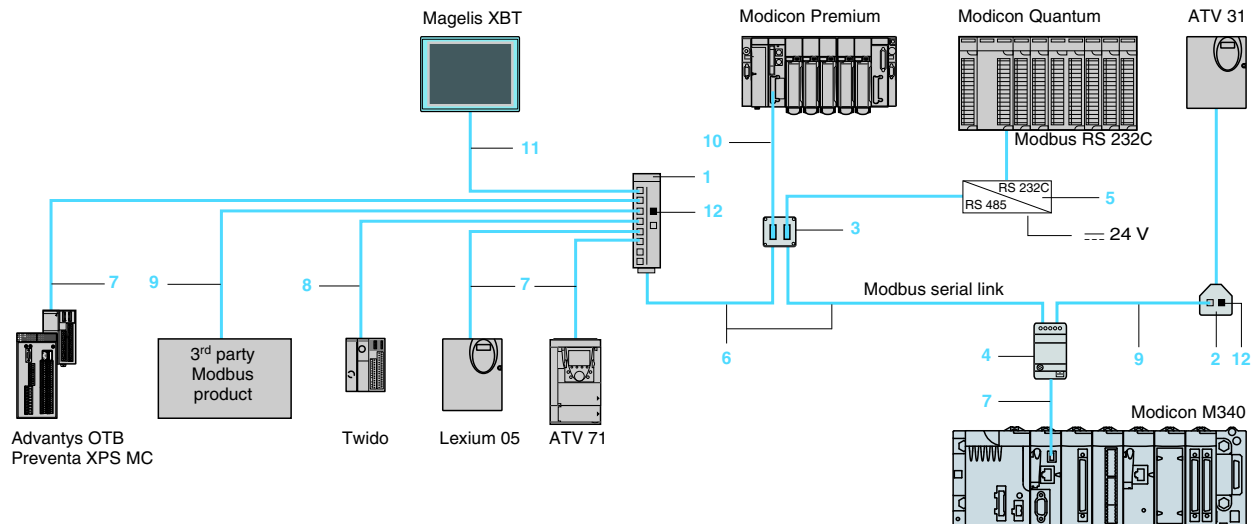



### Cabling system

3



### Extension and adaptation elements for RS 485 serial link

3.3

	Designation	Description	Reference	Length	Unit reference	Weight kg
 LU9 GC3  TSX SCA 50  TSX SCA 62  VW3 A8 306 TF●●  TWD XCA ISO  TWD XCA T3RJ  VW3 A8 114  XGS Z24	<b>Modbus splitter box</b>	- 10 x RJ45 connectors - 1 x screw terminal block	1	—	LU9 GC3	0.500
	<b>T-junction boxes</b>	- 2 x RJ45 connectors - 1 x integrated cable with RJ45 connector Dedicated for Altivar and Lexium	2	0.3 m 1 m	VW3 A8 306 TF03 VW3 A8 306 TF10	0.190 0.210
	<b>Passive T-junction box</b>	- Tap-off point, extension of trunk cable - Line termination adapter	—	—	TSX SCA 50	0.520
	<b>Passive 2-channel subscriber socket, 2 x 15-way female SUB-D connectors and 2 x screw terminals</b>	- 2-channel tap-off point and extension of trunk cable - Address coding - Line termination adapter	3	—	TSX SCA 62	0.570
	<b>T-junction box</b> Screw terminals for main cable. 1 x RJ45 connector for derivation	- Insulation of the RS 485 serial line - Line termination adaptation (R = 120 Ω, C = 1 nF) - Line pre-polarized (2 x R = 620 Ω) (1) 24 V $\overline{\text{---}}$ power (2) Mounting on $\sim$ 35 mm	4	—	TWD XCA ISO	0.100
	<b>T-junction box</b> 3 x RJ45 connectors	- Line termination adaptation (R = 120 Ω, C = 1 nF) - Line pre-polarized (2 x R = 620 Ω) (1) Mounting on $\sim$ 35 mm	—	—	TWD XCA T3RJ	0.080
	<b>Modbus / Bluetooth® adapter</b>	- 1 x Bluetooth® adapter (10 m range, class 2) with 1 x RJ45 connector, - 1 x 0.1 m long cordset for PowerSuite with 2 x RJ45 connectors, - 1 x 0.1 m long cordset for TwidoSuite with 1 x RJ45 connector and 1 x mini-DIN connector, - 1 x RJ45/SUB-D male 9-way adapter for ATV speed drives	—	—	VW3 A8114	0.155
	<b>RS 232C/RS 485 line adapter without modem signals</b>	24 V $\overline{\text{---}}$ /20 mA power supply, 19.2 kbit/s Mounting on $\sim$ 35 mm	5	—	XGS Z24	0.100
	<b>Line terminator</b>	For RJ45 connector (R = 120 Ω, C = 1 nF)	12	Sold in lots of 2	VW3 A8 306 RC	0.200
		(1) Polarized terminated requires to connection of Twido controller master. (2) 24 V $\overline{\text{---}}$ power supply external or thru the serial port integrated to Modicon M340 processors.				

# Modicon M340

## automation platform

### Modbus serial link and character mode

#### Cables and connecting cordsets for RS 485 serial link

Designation	Description	Reference	Length	Unit reference	Weight kg
<b>RS 485 double shielded twisted pair trunk cables</b>	Modbus serial link, supplied without connector	6	100 m	<b>TSX CSA 100</b>	5.680
			200 m	<b>TSX CSA 200</b>	10.920
			500 m	<b>TSX CSA 500</b>	30.000
<b>Modbus RS 485 cables</b>	2 x RJ45 connectors	7	0.3 m	<b>VW3 A8 306 R03</b>	0.030
			1 m	<b>VW3 A8 306 R10</b>	0.050
			3 m	<b>VW3 A8 306 R30</b>	0.150
	1 x RJ45 connector and 1 x 15-way SUB-D connector	—	3 m	<b>VW3 A8 306</b>	0.150
	1 x mini-DIN connector for Twido controller and 1 x RJ45 connector	8	0.3 m	<b>TWD XCA RJ003</b>	0.040
			1 m	<b>TWD XCA RJ010</b>	0.090
			3 m	<b>TWD XCA RJ030</b>	0.16
	1 x RJ45 connector and 1 end with flying leads	5	3 m	<b>VW3 A8 306 D30</b>	0.150
	1 x miniature connector and 1 x 15-way SUB-D connector	9	3 m	<b>TSX SCP CM 4530</b>	0.180
<b>Cordsets for Magelis XBT display and terminal</b>	1 x RJ45 connector and 1 x 25-way SUB-D connector for: - XBT N200/N400/NU400 - XBT R410/411 - XBT GT2...GT7 (COM1 port) (1)	11	2.5 m	<b>XBT Z938</b>	0.210
	2 x RJ45 connectors for : - XBT GT1 (COM1 port) - XBT GT2...GT7 (COM2 port)	11	3 m	<b>VW3 A8 306 R30</b>	0.150

3

3.3

#### Connecting cordsets for RS 232 serial link

Designation	Description	Reference	Length	Unit reference	Weight kg
<b>Cordset for Data Terminal Equipment</b> (DTE: printer...)	Serial link for Data Terminal Equipment (DTE) (2) 1 x RJ45 connector and 1 x 9-way SUB-D female connector	—	3 m	<b>TCS MCN 3M4F3C2</b>	0.150
<b>Cordset for Data Communication Equipment</b> (DCE: modem, converter...)	Serial link for point-to-point equipment (DCE) 1 x RJ45 connector and 1 x 9-way SUB-D male connector	—	3 m	<b>TCS MCN 3M4M3S2</b>	0.150

(1) Must be associated with an **XBT ZG909** adapter.

(2) If the DTE is equipped with a 25-way SUB-D connector, additionally order the 25-way female / 9-way male SUB-D **TSX CTC 07** adapter.